ENGINEERING NEWS-RECORD

APRIL 14, 1949

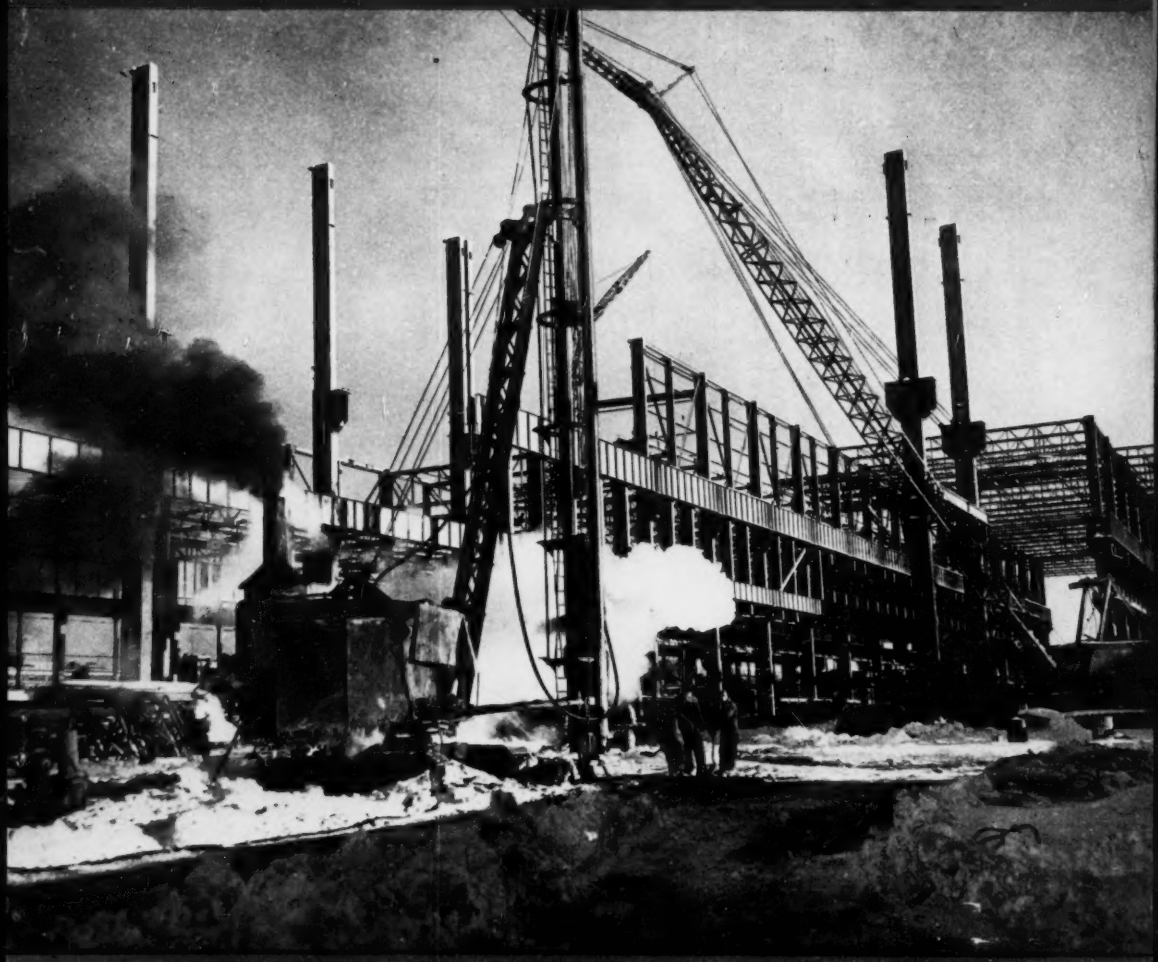

Limited headroom in new turbine plant required third-point suspension of crane girders

DISPLACEMENT RAFT SUPPORTS INDIA POWER PLANT

• • •

HUNGRY HORSE DAM WORK GOES ON FULL SCHEDULE

A McGRAW-HILL PUBLICATION

BYERS WROUGHT IRON PIPE

helps to keep this driveway open for traffic *despite* the snow!

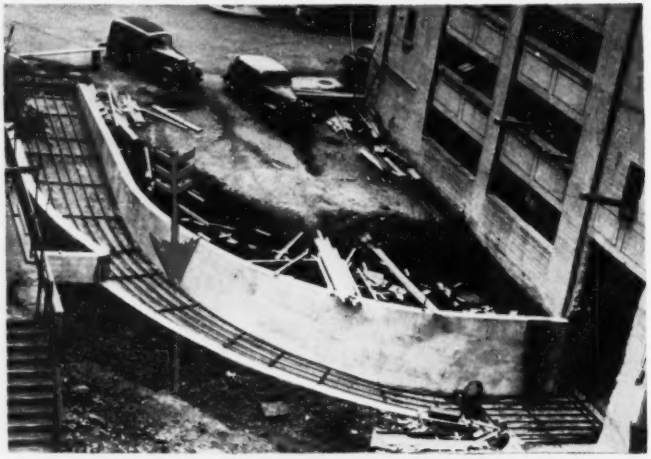

The frequent, heavy snows common in the Amsterdam, N.Y. area posed a real problem when the Bigelow-Sanford Carpet Company recently constructed a plant access driveway. This ramp—85-feet long, laid out on a 10% grade, and with a 90° turn—leads from basement to street, and is used by industrial trucks moving materials and finished products between buildings. Any interference with this traffic would delay production and shipping operations, while keeping the drive clear of snow and ice in the usual manner would constitute a major maintenance expense.

The plant engineering staff successfully solved the problem by installing a snow melting system, with a grid of $1\frac{1}{4}$-inch Byers Wrought Iron pipes connected into 2-inch wrought iron pipe headers. With a water temperature of 130°F, the system is designed to melt 2-inches of snow an hour. Residual water and normal storm drainage are carried away from catch basins located at top and bottom of ramp, through 8-inch wrought iron pipe.

The results obtained have fully justified the judgment of the engineers. In a full winter's operation, with snow depths ranging from 18 to 30-inches, the system worked to perfection. The pavement remained clean and dry without the use of snow shovels or chemicals. Fuel costs are estimated to be low.

In an overwhelming proportion of the successful snow melting systems now installed and operating, designers have used wrought iron pipe for four excellent reasons. The pipe is readily formed and welded. It has a high rate of heat emission. It expands and contracts at practically identical rates with concrete, banning stresses and strains. And its resistance to the corrosive conditions encountered has been conclusively demonstrated in thousands of installations where similar conditions existed.

Our booklet, THE A B C'S OF WROUGHT IRON, explains why wrought iron serves longer and better. Ask for a complimentary copy.

A. M. Byers Co., Pittsburgh, Pa. Established 1864. Boston, New York, Philadelphia, Washington, Atlanta, Chicago, St. Louis, Houston, Salt Lake City, Seattle, San Francisco. Export Division: New York, N. Y.

CORROSION COSTS YOU MORE THAN WROUGHT IRON

BYERS
GENUINE WROUGHT IRON
TUBULAR AND HOT ROLLED PRODUCTS
ELECTRIC FURNACE QUALITY ALLOY AND STAINLESS STEEL PRODUCTS

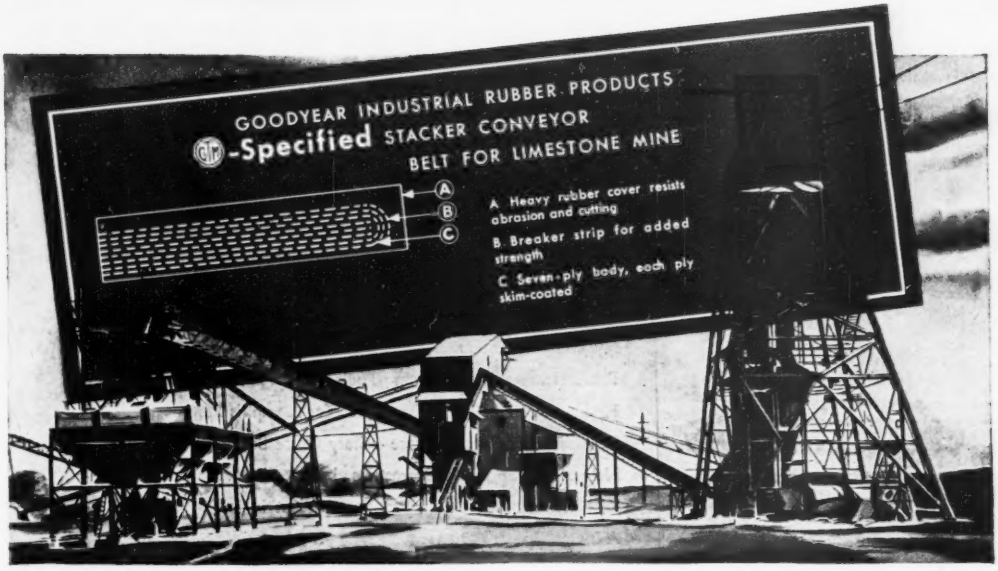

They tote thousands of tons per day

in the world's deepest limestone "mine"

BURIED half a mile under Ohio is the world's deepest "quarry"—a mine that produces limestone at the rate of thousands of tons per working day. And every ounce of that river of rock rides on Goodyear Conveyor Belts for much of the way between the working faces of the mine and storage bins located on the surface.

When the mine owner called in the G.T.M.—Goodyear Technical Man—to recommend the belts best suited to conveyorize the operation, he specified Goodyear Stacker Conveyor to carry the limestone from crusher to storage bins—both located deep in the mine. Three belts—each 42" wide, 7-ply construction—were installed to handle this part of the operation. The G.T.M. recommended Stacker Conveyor because Stacker's extremely tough covers and bonding breaker are more than strong enough to handle the severe abrasion of the rock.

At the shaft head, the crushed rock travels from head frame to storage bins via nearly a half mile of Goodyear 6-ply, 32-oz. duck belting, installed on seven different conveyors handling various sizes of rock.

Altogether, this mine uses a total of ten Goodyear conveyor belts—all installed in accordance with the recommendations of the G.T.M. His recommendations can be your own best insurance of economical, long-life conveyor belt haulage, either above ground or below surface. It will pay you to consult the G.T.M. first. Write him c/o Goodyear, Akron 16, Ohio.

For Hose, Flat Belts, V-Belts, Molded Goods, Packing, Tank Lining *built to the world's highest standard of quality, phone your nearest Goodyear Industrial Rubber Products Distributor.*

We think you'll like "THE GREATEST STORY EVER TOLD" Every Sunday—ABC Network

GOODYEAR

THE GREATEST NAME IN RUBBER

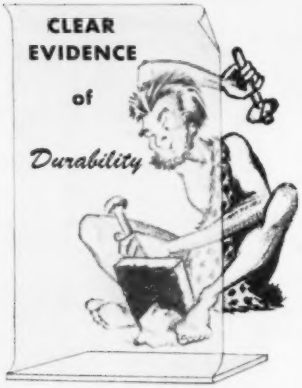

CLEARPRINT PAPER CO.

announces

PAPERCLOTH

Reg. U.S. Pat. Off.

The New Technical Paper of Cloth Durability

Protect your records. Insure your investments of time and effort by using a durable technical paper that will protect your drawings from the ravages of time and constant handling.

Here, at last, is a tough, yet transparent paper of unmatched strength and lasting quality. The surface invites ink and pencil — erases perfectly.

The Clearprint Paper Company offers this product of scientific research as the ultimate answer to the draftsman's appeal for a truly fine cloth-like paper.

Specify

"PAPERCLOTH" No. 1025

Ask For a Sample From Your Dealer or Write to

CLEARPRINT PAPER CO.

Sheldon Building, San Francisco 5, California

ENGINEERING NEWS-RECORD

VOLUME 142 **APRIL 14, 1949** **NO. 15**

WALDO G. BOWMAN
Editor

FEATURES IN THIS ISSUE

Hungry Horse Dam Will Plug This Gorge.....Max Ford 58
Girders Act in Unison to Support Cranes..... 62
How to Dispose of Fluorescent Tubes Safely..... 64
Shortcut Publication of Building Ordinances..... 64
Hyperion Digesters Are Mass-Produced..... 65
Panel Heating for Swimming Pools..... 68
Hydraulic Fill to Close River Reach for Memphis Port..... 70
Stainless Steel Panels Inclose 4-Story Office Building..... 73
Natural Hot Spring to Defrost Road Underpass.....O. R. Kennen 74
Displacement Raft to Support Power Plant in India..... 75
A New Approach to Pavement Design.....F. N. HVEEM 77

DEPARTMENTS

Construction Trends 43
Construction Week 45
Editorials 47
News of the Week..... 49
Field and Office..... 78
Reader Comment 79
Book Reviews 80
New Products 85
Manufacturers' Publications 94
Manufacturers' Activities 98
Men and Jobs 114
Elections and Activities 118
Obituaries 126
Construction Reports 153

Number of copies of this issue..... 44,160

Managing Editor—Eugene E. Halmos, Jr.

Associate Editors—*New York*, V. T. Boughton (senior associate), F. S. Merritt, R. H. Dodds, J. C. Bumstead; *Cleveland*, J. R. Carr; *Chicago*, H. T. Perez; *San Francisco*, N. A. Bowers; *Washington*, V. B. Smith

Assistant Editors—*New York*, T. D. MacGregor and Arthur J. Fox, Jr.; *San Francisco*, L. L. Wise

Contributing Editor—Edward J. Cleary

Business News—Elsie Eaves, *Manager;* J. A. Mahoney, M. W. Roessler, M. Wetzel, E. M. Huber

Staff Assistants—Ethel Lyon, Louise Jacobson, Helen Chase, Elly Kirsten

Domestic News Bureau—Atlanta, Chicago, Cleveland, Detroit, Houston, Los Angeles, San Francisco, Washington. Correspondents in 71 cities in the United States, Canada and Mexico.

Foreign News Bureau—London, Frankfurt, Paris, Moscow, Tokyo, Bombay, Melbourne, Rio de Janeiro, Buenos Aires. *Correspondents*—Athens, Rome, Caracas, Mexico City, Santiago, Shanghai, Zurich, Johannesburg and 40 other cities.

ROBERT F. BOGER
Publisher

Member ABC Member ABP

April 14, 1949 **ENGINEERING NEWS-RECORD** **Vol.** 142—No. 15

Publication Office—99-129 N. Broadway, Albany 1, N. Y.

Executive and Editorial Offices—330 West 42nd St., New York 18, N. Y.

Copyright 1949 by McGraw-Hill Publishing Co., Inc. All rights reserved. Published every Thursday by the McGraw-Hill Publishing Co., Inc., James H. McGraw (1860-1948) founder; JAMES H. McGRAW, JR., President; CURTIS W. McGRAW, Senior Vice-President and Treasurer; JOSEPH A. GERARDI, Secretary; NELSON BOND, Director of Advertising; EUGENE DUFFIELD, Executive Assistant for Publications; J. E. BLACKBURN, JR., Director of Circulation. Cable Address, "McGraw-Hill New York."

Subscriptions: (1 yr., 2 yr., 3 yr.) U. S. and possessions, $6, $9, $12; Pan America, $10, $16, $20; Canada $7, $11, $14; All others, $20, $30, $40.

Address all communications about subscriptions to Director of Circulation. Price 35¢ per copy.

Please indicate position and company connection on all subscription orders.

Entered as Second Class matter October 29, 1936, at the Post Office at Albany, N. Y., under Act of March 3, 1879. Printed in U. S. A.

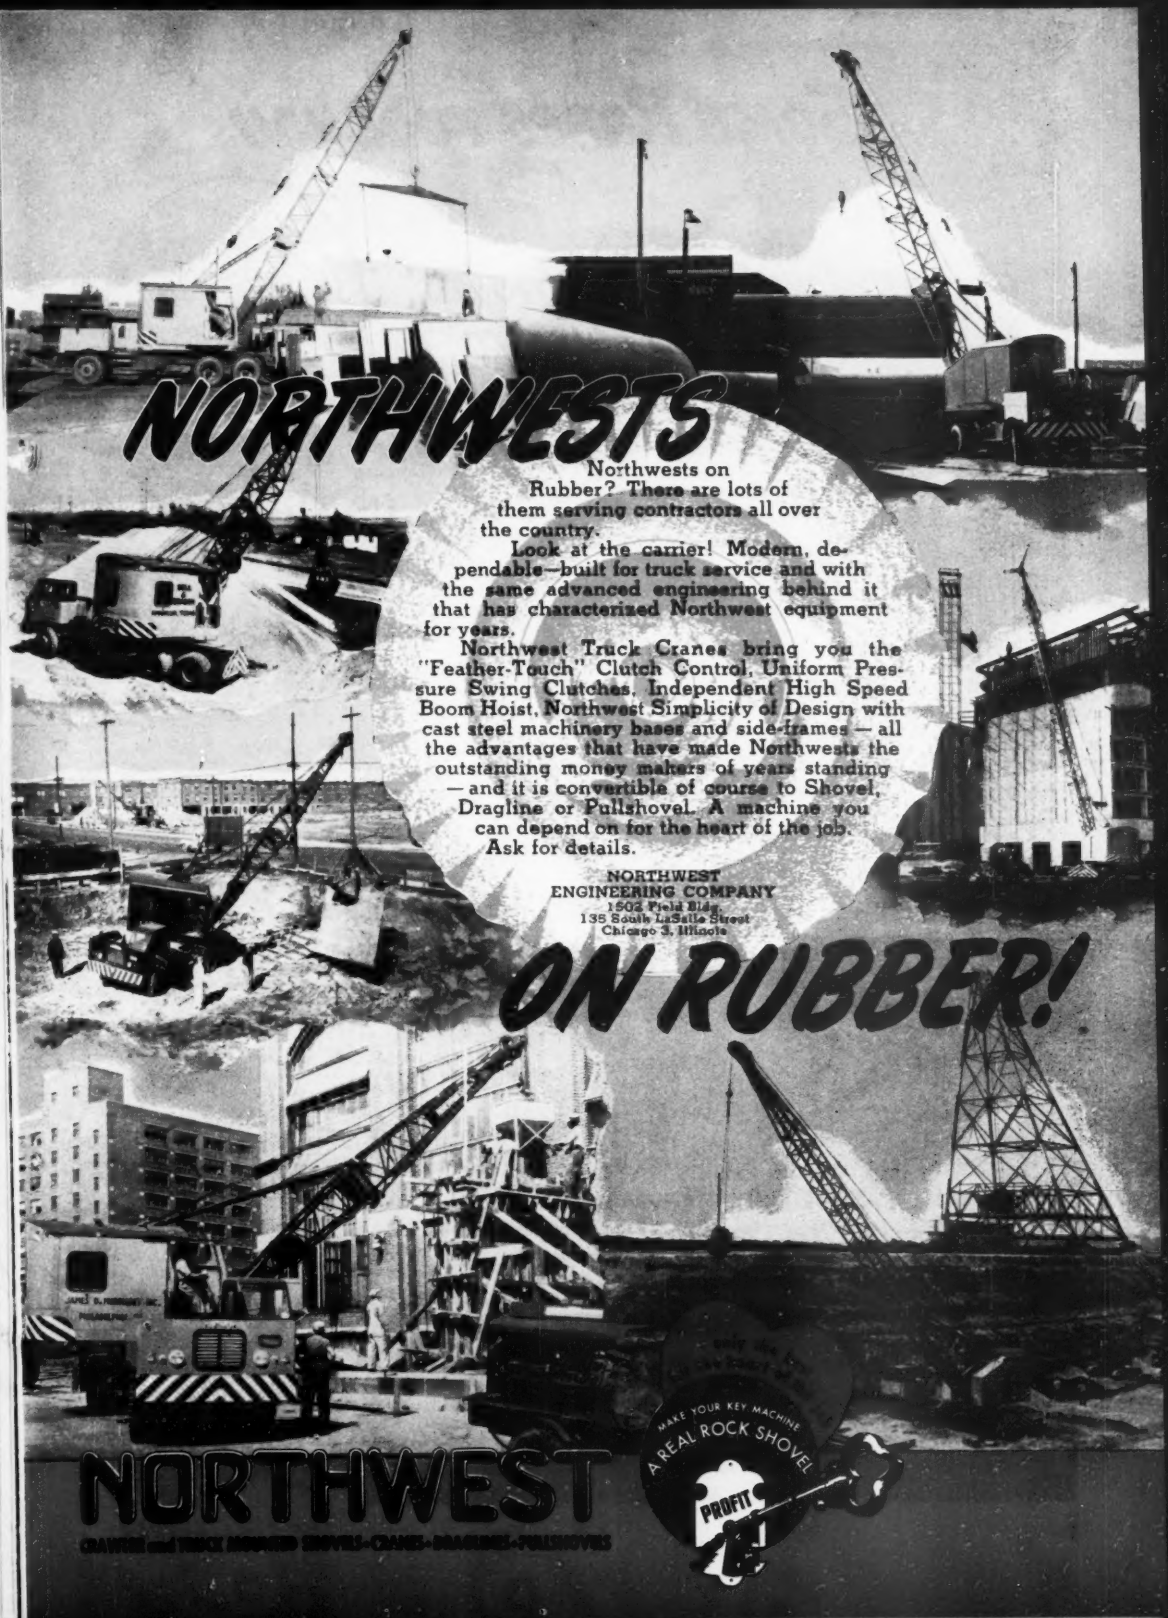
NORTHWESTS
Northwests on Rubber? There are lots of them serving contractors all over the country.
Look at the carrier! Modern, dependable—built for truck service and with the same advanced engineering behind it that has characterized Northwest equipment for years.
Northwest Truck Cranes bring you the "Feather-Touch" Clutch Control, Uniform Pressure Swing Clutches, Independent High Speed Boom Hoist, Northwest Simplicity of Design with cast steel machinery bases and side-frames — all the advantages that have made Northwests the outstanding money makers of years standing — and it is convertible of course to Shovel, Dragline or Pullshovel. A machine you can depend on for the heart of the job. Ask for details.
NORTHWEST ENGINEERING COMPANY
1502 Field Bldg.
135 South LaSalle Street
Chicago 3, Illinois
ON RUBBER!
NORTHWEST
CRAWLER and TRUCK MOUNTED SHOVELS-CRANES-DRAGLINES-PULLSHOVELS
MAKE YOUR KEY MACHINE
A REAL ROCK SHOVEL
PROFIT

SOME ROPES FOOL YOU

U-W 6×37 WIRE ROPE WITH HEMP CENTER IS EXCELLENT FOR FACTORY CRANES BECAUSE IT IS FLEXIBLE AND RESISTS BENDING FATIGUE

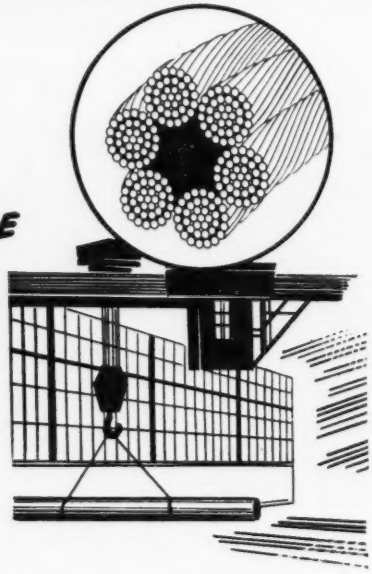

BUT...

FOR HOT LADLE CRANES U-W 6×37 I.W.R.C. ROPE IS BETTER BECAUSE THE METALLIC CENTER RESISTS INTENSE HEAT

For longest and best service, always specify
U-W LAYRITE (*Preformed*) IMPROVED PLOW STEEL

UPSON-WALTON IS THE ONLY MANUFACTURER OF ALL 4•••
Wire Rope, Tackle Blocks, Wire Rope Fittings, Brattice Cloth.
We invite you to let us engineer your problem jobs.

Copyright 1948—The Upson-Walton Company

THE UPSON-WALTON COMPANY
Manufacturers of Wire Rope, Wire Rope Fittings, Tackle Blocks, Brattice Cloth
Main Offices and Factory: Cleveland 13, Ohio

114 Broad Street, New York 4
3525 West Grand Ave., Chicago 51
241 Oliver Building, Pittsburgh 22

It's New.. the one-yard MIXERMOBILE

A complete mobile concrete mixing unit and elevator

GREATER PROFIT ON EVERY JOB...

The new one-yard Mixermobile Model M-6 built to fit all jobs, both small and large. Its complete mobility means more jobs covered every day.

SAVES money by using dump trucks—mixes concrete on the job.
SAVES cost of erecting tower—35-ft. tower attached.
SAVES cost of hoist and storage hopper—included with tower.
SAVES time—drive to the job, ready to mix in five minutes. When pouring is finished drive to next job.
Turns out 200 cubic yards of concrete per day.

Use MIXERMOBILE — the most economical method of handling concrete on the job. Cuts labor costs—no time wasted waiting for concrete. One man operates complete unit.

FEATURES: HYDRAULIC CONTROLS.
MIXER COMPLETELY ENCLOSED—controlled by specially designed shaft (gears enclosed on outside, no contact with cement.)
POWERED BY V-8 FORD ENGINE.
DISCHARGE TIMER
FOOL-PROOF WATER CONTROL SYSTEM.
WEIGHT— 20,000 lbs.
Will pass all highway limitations.

- 35-FT. TOWER lifts concrete in hoist bucket and empties into tower hopper. Eliminates cost of cranes and mixing to and from the job. Extension may be had by special order.
- HYDRAULIC CONTROLLED SKIP holds 1 cu. yd. Loaded directly from dump trucks.

WRITE TODAY FOR LITERATURE AND YOUR NEAREST DEALER

MIXERMOBILE MANUFACTURERS

6855 N. E. HALSEY STREET, PORTLAND 16, OREGON

GET BETTER TILE AND BLOCK-WORK with BRIXMENT!

Tile or block-work offers very little protection against the penetration of water, unless both inside and outside head joints are completely filled with mortar.

In laying clay tile, or concrete or cinder block, even when they are used only for back-up work, especial care should be taken to secure full head joints on both the inside and the outside edges of the unit. Either of the following two methods may be used:



Method 1. Full head joints should be thrown onto both edges of the tile to be placed, or—

Method 2. A full head joint should be thrown onto one edge of the tile in place and also onto the opposite edge of the tile to be placed.

Enough mortar should be used to cause excess mortar to ooze out of the joints on both sides of the tile.

Method 1. Full head joints should be thrown onto both edges of the block to be placed, or—

Method 2. A full head joint should be thrown onto one edge of the block already in place and also onto the opposite edge of the block to be placed.



Enough mortar should be used to cause excess mortar to ooze out of the joints on both sides of the block.

One of the reasons bricklayers prefer Brixment mortar is the way it *sticks* to the tile or block, as shown above. It "stays put." The bricklayer does not have to stoop to the board for more mortar. *You* get a stronger, more water-resistant wall. ● Brixment mortar is easier to work, saves time, effort, and money. In addition, it has higher water-retaining capacity, greater bonding quality, is more durable. It is this *combination* of advantages that has made Brixment the largest-selling masonry cement on the market.

LOUISVILLE CEMENT COMPANY, Incorporated, LOUISVILLE, KENTUCKY

Here's the new

MIDDLEWEIGHT CHAMPION

of the rock drilling field

it's Ingersoll-Rand's
45-pound class
J-40 JACKHAMER

CARSET JACKBIT
SET WITH CARBOLOY INSERTS

THE JACKHAMER DESIGNED WITH THE CARSET JACKBIT IN MIND

Carset Jackbits drill from 50 to 400 times as many feet of hole as the best steel bits available. The J-40 Jackhamer was designed to take full advantage of the revolutionary features of these wonderful new bits. This new Jackhamer and these new bits form a Carset drilling combination that will materially increase both hole footage and profits for the user.

J-40 Pound for pound it is the most powerful drill in its class

J-40 Combines unusually high drilling speed with extremely easy handling

J-40 Brings you extra rotation power

J-40 Is light enough and fast enough for general work and it will handle many of the "BIG" jobs

J-40 Sets a new high in rock drilling performance

Try the J-40 and see for yourself why we claim it to be

The Most Versatile Jackhamer ever developed

Ingersoll-Rand

11 BROADWAY, NEW YORK 4, N. Y. 392-5

HARD STUFF IS A SOFT TOUCH WITH A BAY CITY

This Diesel powered BAY CITY 65 is making money out of stone for Rockydale Quarries Corporation of Roanoke, Virginia. Here is a shovel which boasts many features — easy operation with booster clutches • tandem drums in ball bearings • helical gears for quiet, smooth operation • powerful one-piece chain crowd • straddle type dipper sticks and big 1¼ yard dipper. To make any kind of tough excavating or material moving job easy, you can bank on a BAY CITY. See your nearest dealer or wire for information.

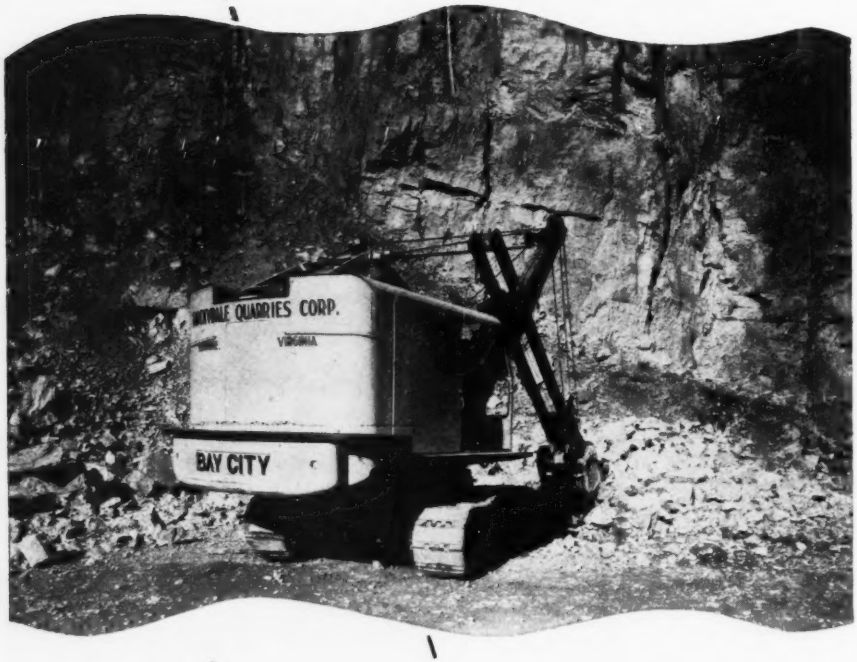



BAY CITY

SHOVELS • CRANES • HOES • DRAGLINES • CLAMSHELLS

BAY CITY SHOVELS INC., BAY CITY, MICHIGAN See your nearest Bay City dealer for excavating and material handling equipment in sizes from ⅜ to 1¼ yard with crane rating up to 20 tons. Both crawler and pneumatic tire mountings.

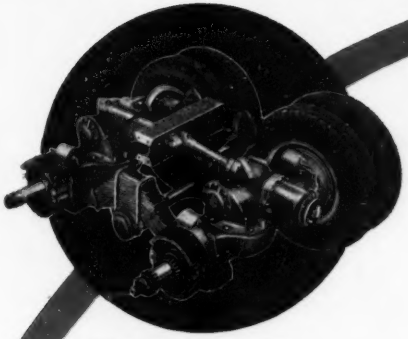

ONLY MACK offers this matchless Balanced Bogie with exclusive Power Divider. Unusual flexibility and balance insure even tire loading and uniform braking; cancel out weight transfer. Mack Power Divider assures good going by transferring power to wheels maintaining the best traction.

MACK TRUCKS
Built to *take it*
... and TAKE IT AWAY

in bigger loads ... on faster schedules ... with greater profits

Mack six-wheel trucks are built to "take it" when it comes to taking out the big loads with power and stamina to spare.

Powerful gasoline or diesel engines! Massive, heat-treated alloy steel frames! Flexible rubber Shock Insulators! Air Assist Clutch and Power Steering! Mack's famed Balanced Bogie and Power Divider! These are your assurance of power and strength for the heaviest loads; maneuverability and ease of control for fast loading and unloading; flotation and traction for the most slippery mud or sand.

Whether for heavy highway hauling or super-duty off-highway work, Macks are designed with more outstanding and exclusive features than any other truck—features that mean greater profits through stepped-up tonnage on faster schedules. It will pay you to get the full story in terms of your particular operation. Write or call your nearest Mack branch or dealer.

IT'S PART OF THE LANGUAGE: *Built Like a* **Mack** *Truck*

Mack Trucks, Inc., Empire State Building, New York 1, New York. Factories at Allentown, Pa.; Plainfield, N. J.; New Brunswick, N. J.; Long Island City, N. Y. Factory branches and dealers in all principal cities for service and parts. In Canada: Mack Trucks of Canada, Limited.

On Garrison Dam Q's

Contractors and engineers are using the most modern earth moving equipment—and lots of it—to build the world's greatest rolled earth fill dam on the Missouri River in North Dakota. Garrison Dam—scheduled for completion in 1953—will be 210 feet high and will have a crest length of 12,000 feet. A total of 75,000,000 cu. yds. of earth and rock fill will be required for the embankment.

Euclid equipment gets the call again at Garrison Dam! Sixty-six Bottom-Dump and 3 Rear-Dump Euclids, 5 Euclid Loaders and 3 water wagons will soon be on the job . . . hauling more and bigger loads at less cost . . . providing dependable, long-life service at low maintenance cost under a wide range of operating conditions.

A big, tough job—Garrison Dam! It's part of a tremendous project of the Corps of Engineers to eliminate destructive floods and harness rivers of the Missouri Basin for irrigation and hydro-electric power. A tough job, yes, but typical of hundreds of construction, mining, and industrial projects where "Eucs" have proved their ability to stay on the job, efficiently and dependably, day after day.

EUCLID
THE PIONEER

EUCLIDS

EUCLID all the way!

PETER KIEWIT SONS' CO. & MORRISON-KNUDSEN CO.
DEPEND ON EUCLIDS!

For their 20,000,000 yd. contract these contractors standardized on Euclid equipment because they know from experience that "Eucs" move more yards more profitably. For hauling the bulk of the earth and gravel, 66 Bottom-Dump Euclids of 25 cu. yd. capacity will be used. These units are powered by Butane engines of 300 h.p. and have a loaded top speed of 28 m.p.h. Drive and trailer tires are 27.00 x 33. Using the same model Euclid tractor as the Bottom-Dumps, 3 water wagons of 10,000 gallon capacity will be used on the fill and haul roads.

The big fleet of Bottom-Dumps will be kept busy by 5 Euclid Loaders working in the huge borrow pits. One of Euclid's more recent developments, the Loader has established many new production records on dozens of airport, dam, and highway jobs . . . the wide cutting blade and 54" belt really load dirt fast! Rear-Dump "Eucs" of 22-ton capacity will haul heavy excavation—these are powered by 300 h.p. engines and have a top speed of 27.7 m.p.h. with full payload. **Yes, it's Euclid all the way at Garrison!**

The EUCLID ROAD MACHINERY Co., Cleveland 17, Ohio

Move the Earth

FOR A BETTER DAY'S WORK

ON FARMS—IN FORESTS—IN OIL FIELDS
IN INDUSTRY AND ON THE HIGHWAYS!

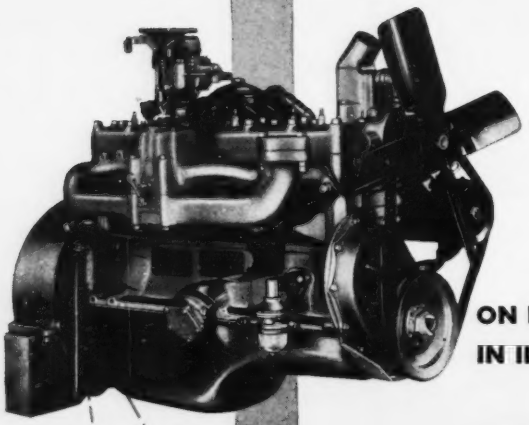

Now available with *gýrol* Fluid Couplings!

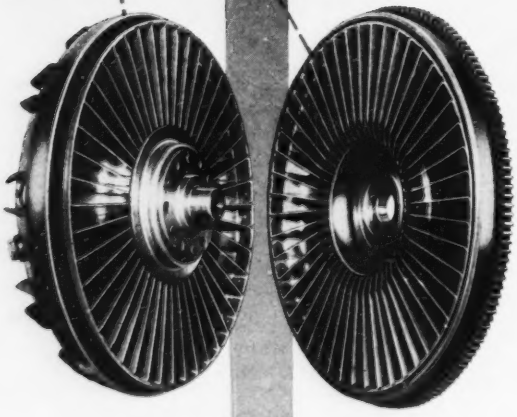

● **You get the good things *first* from Chrysler! Now *gýrol* Fluid Couplings are available on Chrysler Industrial Engines for industrial applications. Here's the cushion of safety between power and load that is so greatly needed on tough jobs. This time-tested coupling prevents shock load, engine stalling, and eliminates declutching. It lengthens clutch life and makes for easier handling of equipment. Famous *gýrol* Fluid Coupling, complete with clutch, clutch housing and a 3 or 4-speed transmission is offered on Models 5, 6, 7, 8, and 12. See your Chrysler Industrial Engine dealer or write for information . . .**

INDUSTRIAL ENGINE DIVISION, CHRYSLER CORP.
12200 E. JEFFERSON, DETROIT 31, MICHIGAN

NATION-WIDE SERVICE

FACTORY-ENGINEERED AND TESTED PARTS WITH EXPERT MAINTENANCE WHEREVER YOU ARE

CHRYSLER

INDUSTRIAL ENGINES AND POWER UNITS

HORSEPOWER WITH A PEDIGREE

the modern Rex Pavers

as modern inside as they are out!

• Before you spend your money for a paver for the big road program ahead, check the only basically modern pavers in the industry. Rex Pavers are modern *inside and out* . . . from the ground up . . . field-tested and proved by 5 years of actual experience in the roughest, toughest kind of high speed production. Just look over the modern advantages Rex will give you:

REX ACCESSIBILITY. The modern streamlined shielding makes these the most accessible pavers you've ever seen. Big, easy-opening doors permit quick access for lubrication and inspection. And streamlining keeps dirt off the working parts . . . assures less clean-up time, lower maintenance, longer life.

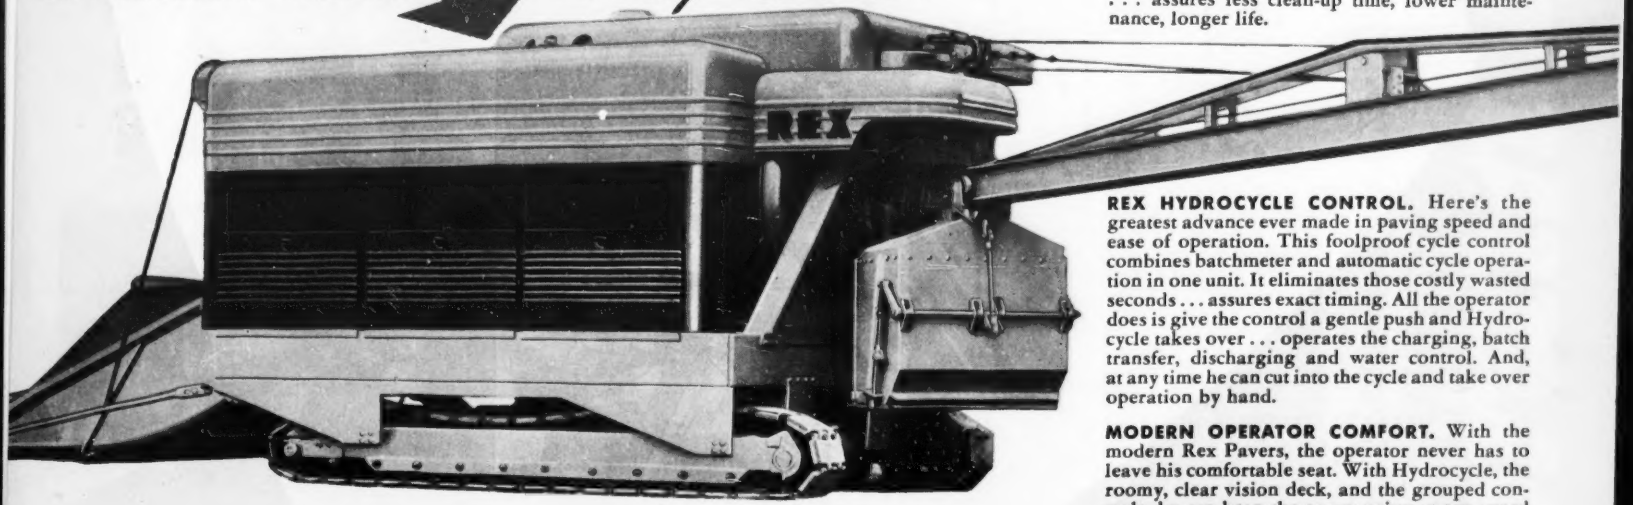

REX HYDROCYCLE CONTROL. Here's the greatest advance ever made in paving speed and ease of operation. This foolproof cycle control combines batchmeter and automatic cycle operation in one unit. It eliminates those costly wasted seconds . . . assures exact timing. All the operator does is give the control a gentle push and Hydrocycle takes over . . . operates the charging, batch transfer, discharging and water control. And, at any time he can cut into the cycle and take over operation by hand.

MODERN OPERATOR COMFORT. With the modern Rex Pavers, the operator never has to leave his comfortable seat. With Hydrocycle, the roomy, clear vision deck, and the grouped controls, he can keep the paver going at top speed all day long with far less effort.

AND MODERN simplicity of design, rugged construction, modern ease of spreading, husky crawlers . . . there's a whole host of features it will pay you to check. For all the facts, see your Rex Distributor or write Chain Belt Company, 1633 W. Bruce St., Milwaukee 4, Wis.

• 34E SINGLE AND DOUBLE DRUM PAVERS

CHAIN BELT COMPANY — REX — CONSTRUCTION MACHINERY

How building designers can get an **electrical layout that fits** ...and save time and money doing it!

1 Before your draftsman touch pencil to paper, call, wire or write your nearest General Electric Office; an experienced building specialist will contact you.

2 Outline to him your preliminary plans and problems; show him the type and location of all electrical loads, special conditions which must be met.

3 At his disposal are many General Electric product engineers . . . authorities in the fields of power distribution, lighting, motors and control.

RESULTS: You save planning time and come up with electrical plans that fit your structure . . . plans that embody all up-to-the-minute electrical developments . . . specifications that assure the building owner maximum operating economies over the years, and establish your reputation for future jobs. Try this easy, 4-step planning method on your next job . . . you'll find it both profitable and enjoyable to work with a General Electric building specialist. ***Apparatus Dept., General Electric, Schenectady, N. Y.***

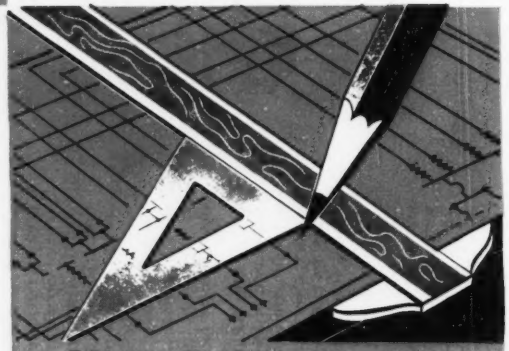

4 Using this wealth of G-E know-how, he will help you plan an integrated electrical system, around which you can easily draw up plans and specifications.

Electric Equipment for Commercial Building

GENERAL ELECTRIC

665-106

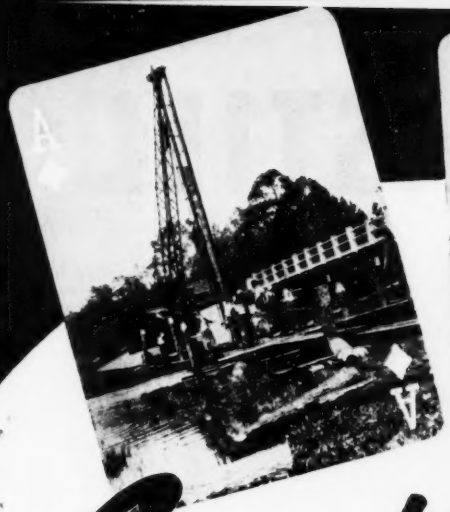

Grand Slam

in bridge building with TL-20 CRANEPOWER

Goodwyn & Murphree, Troy, Alabama, own 4 Lorains . . .
"trump" construction costs on bridge job with 1 Lorain TL-20 Crane

Here's how Goodwyn & Murphree made a "Grand Slam contract" on a bridge building job near Red Bay, Alabama.

Leading with a TL-20, one of four company-owned Lorains, the contractors "finessed" every operation and "trumped" construction costs on every count with this power-packed, versatile machine and its various crane attachments.

Tricks taken by the TL-20 as shown by the photos—top left: TL-20 crane, equipped with 1250 lb. drop hammer, drives 75 ten-inch piles to 10 ft. depth in 10 hr. day for two cofferdams below water level. Top right: Swinging the concrete mixer into place. Center: Pouring concrete into forms. Bottom right: Working as a dragline to dig foundation for a concrete form.

This is one of hundreds of construction jobs where the TL-20 is taking extra tricks in production with its labor-saving selection of boom equipment and choice of either crawler or rubber-tire mountings. For this peppy, multi-purpose machine provides over 50 possible combinations to fit your job conditions . . . a full "deck of aces" for a profitable operation. Let your Thew-Lorain Distributor deal you all the facts on this money-making machine—today!

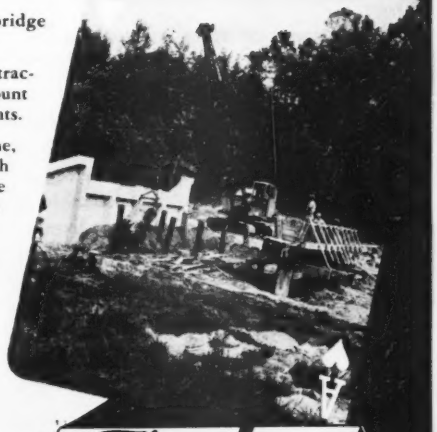

THE THEW SHOVEL CO.
LORAIN, OHIO
Cable Address: UNLOADER

Lorain®

Thew Lorain TL-20

...STILL

WHEN YOU THINK OF INDUSTRIAL AND CONSTRUCTION POWER, THINK OF THE BIG YELLOW ENGINES THAT SUPPLY SO MUCH OF IT

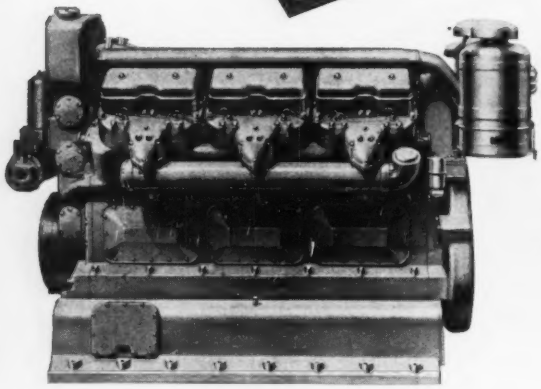

"CATERPILLAR" DIESEL D397 ENGINE—500 hp. (max.) at 1200 rpm. V-12—5¾" bore x 8" stroke. Equipped with blower.

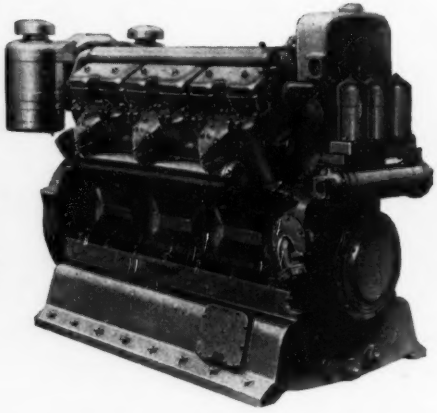

"CATERPILLAR" DIESEL D386 ENGINE—400 hp. (max.) at 1200 rpm. V-12—5¾" bore x 8" stroke.

Now you can power your larger machines with available new-size engines that extend the range of "Caterpillar" Diesels to 500 horsepower. These bigger "yellow engines" are designed, built and job-tested with the same exhaustive thought and care that have enabled thousands of their older family members to run up records of forty, fifty and even seventy thousand hours of dependable operation. They have the same ruggedness, the same efficient fuel system and fuel economy, the same high all-round quality that have made "Caterpillar" Diesels world famous for low lifetime cost-per-hour.

When you need a bigger or more powerful shovel, dredge, ditcher, crusher, asphalt plant, or other piece of heavy power equipment, specify these bigger yellow "Caterpillar" Diesels. Let your "Caterpillar" dealer give you full information on these new engines. He is as near as your telephone.

CATERPILLAR TRACTOR CO. • PEORIA, ILLINOIS

BIGGER YELLOW ENGINES ...FOR YOUR LARGER JOBS

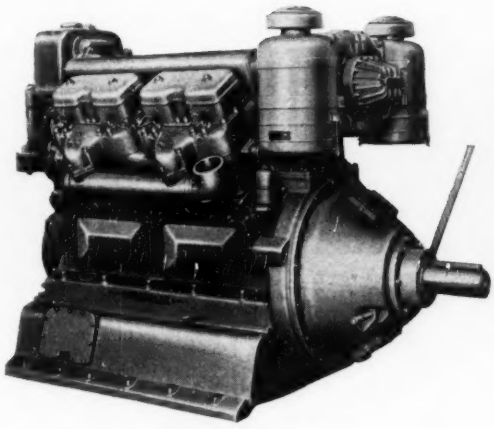

"CATERPILLAR" DIESEL D375 ENGINE—335 hp. (max.) at 1200 rpm. V-8—5¾" bore x 8" stroke. Equipped with blower.

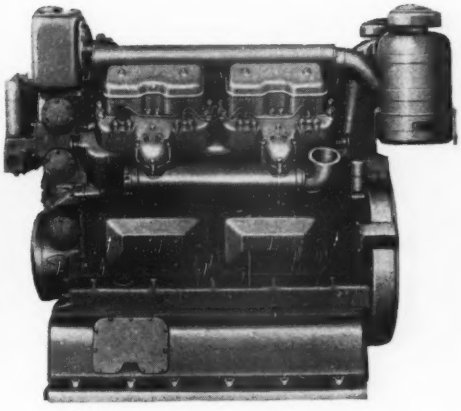

"CATERPILLAR" DIESEL D364 ENGINE—265 hp. (max.) at 1200 rpm. V-8—5¾" bore x 8" stroke.

CATERPILLAR DIESEL

REG. U. S. PAT. OFF.

ENGINES
TRACTORS
MOTOR GRADERS
EARTHMOVING EQUIPMENT



The Construction Industry

...needs the experience of

FORT PITT BRIDGE



ALL OVER AMERICA—institutions, hospitals, industrial and power plants, schools, hotels and bridges are under construction—and for the structural steel fabrication FORT PITT BRIDGE is an excellent, experienced source of supply.



AMERICAN INSTITUTE OF STEEL CONSTRUCTION INC. AISC FOUNDED 1921

"Steel Permits Streamlining Construction with Safety, Endurance and Economy"

FORT PITT BRIDGE WORKS

Member American Institute of Steel Construction

General Offices, Pittsburgh, Pa. Plant at Canonsburg, Pa.

BRANCH OFFICES

NEW YORK, N.Y. ..... 441 Lexington Ave.
CLEVELAND, OHIO ..... Bulkley Building
COLUMBUS, OHIO ..... Huntington Bank Bldg.
DETROIT, MICHIGAN ..... New Center Bldg.

NELSON "Top-Side" Method Cuts Roofing Application Costs!

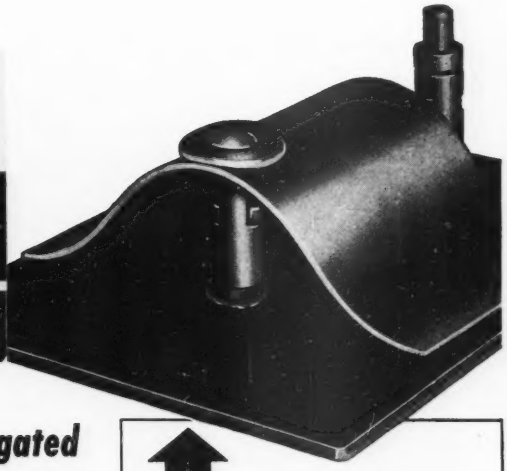

Produce Better Jobs! Apply Corrugated Iron, Aluminum, or Protected Metal with NELSON "RIVWELD" STUDS

Roofing contractors are *staying on top of the job* with the Nelson "Rivweld" method of fastening. The result, in every case, is a better job, done faster, at substantial savings in cost.

Because all work is done entirely from the top-side of the roof, no inside scaffolding or rigging is required, no workmen are needed under the roof.

In this simplified "production line" method, Nelson "Rivweld" rivet studs are quickly end-welded to the purlins with the light-weight Nelson Gun. The corrugated metal is then impaled over the rivet extensions which are upset to form a weathertight job.

TYPICAL RESULTS: One contractor reports a saving of over $2.00 per square in applying corrugated iron roofing to a large factory building. Another contractor writes: "Our cost records show we have saved a minimum of 20% in application costs on every one of the scores of jobs on which we've used the Nelson method."

The Nelson Method of Fastening is also widely used for applying corrugated asbestos roofing and siding; for installing sprinkler and piping systems: conduit and wireways; insulations of all types.

RENT IT—TRY IT! Nelson Stud Welding equipment may now be rented for only $45 a month. Use the coupon to get complete details about this plan and the Nelson cost-saving method of fastening.

NELSON STUD WELDING

Division of Morton Gregory Corporation
2751 Toledo Avenue Lorain, Ohio

NELWELD

NEW COMPOSITE STUD

for applying Corrugated Aluminum roofing and siding prevents corroding. Made up of a cadmium-plated flux-filled mild steel base or body and an aluminum insert. An aluminum washer is placed over the stud before the latter is riveted over to secure the sheet. This construction practically eliminates the possibility of electrolytic action.

GET ALL THE FACTS NOW!

NELSON STUD WELDING
Division of Morton Gregory Corporation
2751 Toledo Avenue, Lorain, Ohio

Send complete information about Nelson Stud Welding for the following roofing and siding materials:

- ☐ Corrugated Iron
- ☐ Corrugated Aluminum
- ☐ Corrugated Protected Metal
- ☐ Corrugated Asbestos

*Name*_____

*Company*_____

*Address*_____

*City*_____ *State*_____

There's a Macwhyte Rope that's the right rope for your equipment

All job-proved—a thousand and one wire ropes to choose from

For easy handling and longer service use PREformed Whyte Strand—it's internally lubricated.

Ask a Macwhyte representative to recommend the rope best suited for your equipment.

Macwhyte Wire Rope

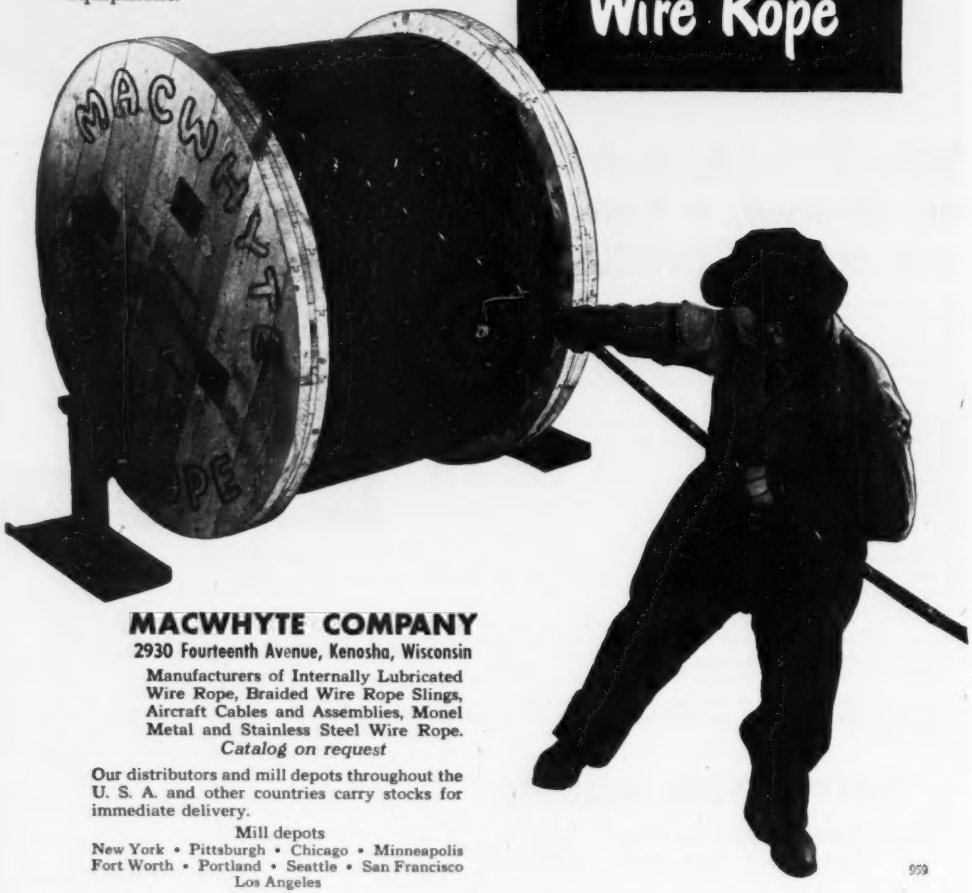

MACWHYTE COMPANY

2930 Fourteenth Avenue, Kenosha, Wisconsin

Manufacturers of Internally Lubricated Wire Rope, Braided Wire Rope Slings, Aircraft Cables and Assemblies, Monel Metal and Stainless Steel Wire Rope.

Catalog on request

Our distributors and mill depots throughout the U. S. A. and other countries carry stocks for immediate delivery.

Mill depots

New York • Pittsburgh • Chicago • Minneapolis
Fort Worth • Portland • Seattle • San Francisco
Los Angeles

959

● You'll be able to move Byers Traveler *where* and *when* its versatile services are required! It's always ready to go..

On or off the highway, the Traveler propels itself under the direction of one man only . . . the operator.

Around the job, you'll find it fast, powerful and adaptable to most every job condition. It handles all boom attachments equally well, performing many tasks not adapted to a crawler rig or to a long-chassis-two-man* rubber tired crane or shovel.

These differences add up to make Byers Traveler a profitable machine to own and use. Ask your nearby Byers distributor for the new complete ½ or ⅝ yd. Traveler catalog, just off the press.

THE BYERS MACHINE CO., Ravenna, Ohio
Distributors Throughout the World

*Also available from Byers if you prefer it.

Typical Traveler job . . . pick it up here, carry it anywhere, set it down there.

INQUIRE TODAY

BYERS TRAVELER

BRUNING BW WHITEPRINTER 93

VOLUMATIC MODEL

Now *all* your departments can handle their copying jobs with a single versatile machine: the Bruning Whiteprinter, Volumatic Model 93. This brand new machine at last provides you the necessary volume and high speed (up to 105 sq. ft. per minute). At the same time, through simpler operations and less wastage, it reduces copying costs.

The Volumatic produces sharp, highly legible copies of engineering drawings, documents, or *anything* that is printed, drawn, written, or typed on a translucent medium. It copies charts, plats, letters, invoices, financial reports—and many other items. Its operation is so simple that a girl can learn to run it in less than an hour.

The Volumatic takes cut sheets or roll stock with equal facility. It produces sharp BW Prints from post card size up to 42 inches wide and of unlimited length. You can have light, medium, or card-weight BW Prints; BW Prints on tinted stocks; BW Prints on film or cloth; or BW Prints with colored lines. BW Prints are delivered front or rear, neatly stacked.

CHECK THESE BW ADVANTAGES

No vents or exhaust fans: The Bruning Model 93 is completely odorless . . . can be used anywhere in the office without the slightest offense.

No plumbing connections: There are no pipes to connect, no water to supply or drain away. The Model 93 is mounted on casters, is moved where needed.



Built-in transformer: The Model 93 is the first large volume whiteprinter which protects you against voltage fluctuations common to power lines. Assures longer lamp life, more uniform prints, as well as savings on BW Materials.

Uniform developing: Both sides of the print receive a thin, measured film of BW Developer Solution at once. This assures flat prints, never under- or over-developed.

Send today for full information. Let us send you a file of literature describing the new BW Volumatic Model 93 and other Bruning Whiteprinters, and the BW Mediums you can use with them. See for yourself the extreme versatility, economy, and speed of these machines. There is no obligation.

Charles Bruning Company, Inc.

4714-22 West Montrose Avenue, Chicago 41, Ill.

New York · Newark · Boston · Pittsburgh · Chicago · Detroit
Cleveland · Milwaukee · St. Louis · Kansas City, Mo. · Houston
Los Angeles · San Francisco · Seattle

Other Bruning Products you should know about

Drafting Machines • Sensitized Papers & Cloth • Tracing Papers • Erasing Machines
Drafting Room Furniture • Slide Rules
Surveying Instruments • and many others.

CUT FUEL COSTS IN HALF

with the SCHRAMM *Pneumastat*

YES, this saving is now possible with the new feature of the Schramm Air Compressor . . . the Pneumastat!

The Pneumastat assures you of *infinitely variable speed* and the elimination of continuous loading and unloading. The result is an *even flow of air* regardless of how variable the compressor load might be!

Other advantages offered by the Pneumastat are:

- ✓ Higher average working pressure—more work from your tools.
- ✓ Simple and rugged . . . no valves, no checks, no pistons.
- ✓ Longer compressor and engine life.
- ✓ Lower maintenance costs.
- ✓ Requires no service or adjustment.

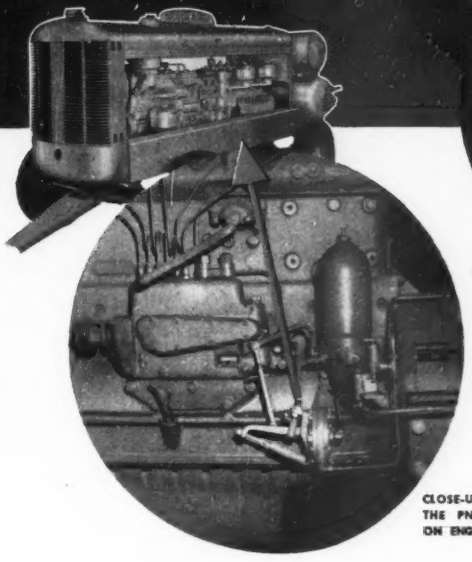

CLOSE-UP VIEW OF THE PNEUMASTAT ON ENGINE BLOCK

COMPLETE DETAILS ON REQUEST, WRITE DEPT. AOW.

SCHRAMM INC.

THE COMPRESSOR PEOPLE • WEST CHESTER • PENNSYLVANIA

"Stay out of here folks.... this hot stove will fry you!"

WHEN the first gas range, with its promise of a cool kitchen, was exhibited at the Philadelphia Centennial Exposition in 1876, little did its sponsor dream of a market of 21,000,000 homes. For that is the extraordinary number of residential customers now served by gas for cooking, refrigeration, or home heating.

Water supply and sanitation also made extraordinary progress in the half-century since 1899, the year our Company was established. Today, 12,000 water works furnish 85 million people with a dependable supply of safe, palatable water. Over 6,000 sewage treatment plants contribute to the health of the nation.

In these three progressive branches of public service—gas, water supply and sanitation—are customers who have been buying pipe from us for 50 years. They know that we, also, have made signal progress, from decade to decade, in developing and perfecting better methods for the production of better pipe.

To those responsible for the great progress in water supply, gas and sanitation service and their contribution to better health and living over the past fifty years, America pays tribute.

U.S. CAST IRON PIPE

1899-1949

U. S. Pipe & Foundry Co.

Makers for 50 years of cast iron pipe for water, gas and sewerage service.

General Offices: Burlington, N. J.

Let's Have Your SAND, STONE *and* CEMENT STORAGE *and* BATCHING PROBLEMS

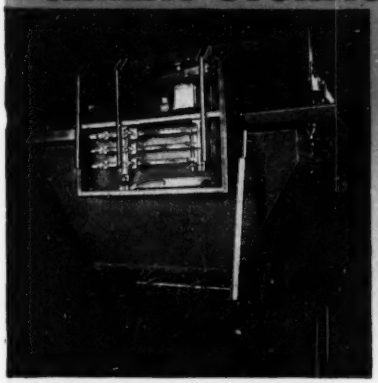

ERIE'S AggreMeter Line, backed by over a quarter century of application experience, is at your service. From the smaller GA Portable AggreMeters to the largest of central plants that combine Aggregate and Bulk Cement handling, Erie is prepared to meet your needs. May we direct you to some Erie AggreMeter installation near you, or let's have your immediate problem for recommendations. We list standard plants, left below. Write for bulletins.

NEW BWC AGGREMETERS

ERIE presents this new sturdy all-welded, easy operating line of weighing AggreMeters. They feature new type scale suspension with few parts. Erie's distinctive discharge method is well known for fast charging service. Type BWC units are available in 1 1/2, 2, 3, 4, and 5 cu. yard sizes.

OTHER ERIE *AGGREMETERS*

TYPE GA
Portable Plants
36, 52, and 68 cu. yard sizes

TYPE CAB
3-Compartment
74, 88, 107, 129, 150, and 211 cu. yard sizes

TYPE CTB
Like Type CAB
Only with Long Columns

TYPE CTE
4-Compartment-in-Line
145, 160, and 200 cu. yard sizes

TYPE CTC
Like Type CTE
Only with Long Columns

TYPE M
Portable Cement Bins
Single Compartment
29, 45, and 73 cu. yard sizes

TYPE L
Single and Double Compartment
90, 112, and 148 cu. yard capacity

ERIE

STEEL CONSTRUCTION COMPANY



194 GEIST ROAD • ERIE, PENNSYLVANIA

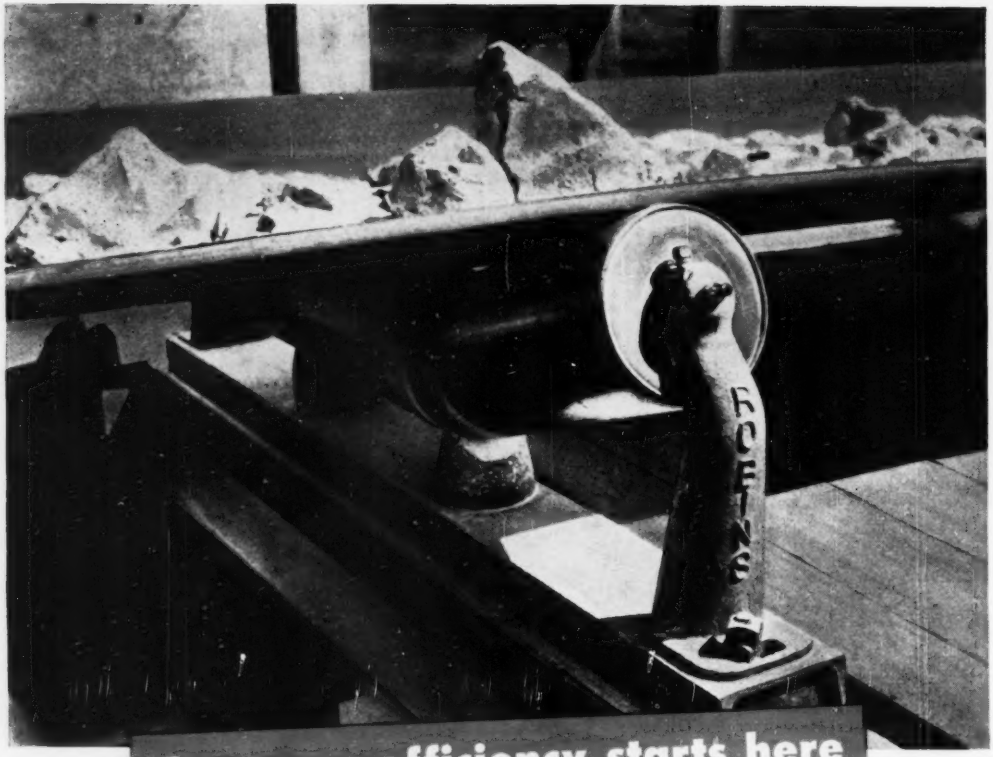

Conveyor efficiency starts here

Your conveyor can be no better than its idlers!

For the idlers must do two things: (1) They must withstand severe usage. (2) They must keep your conveyor belt tracking properly. Otherwise, your entire conveyor can break down.

Yes, efficient idlers are vital to top performance. And because Hewitt-Robins Conveyors are equipped with Robins Idlers, you can depend on them to *move your material at less cost.*

You see, Robins Idlers provide *extra strength.* The reason is their rigid truss design. It is stronger than any other type of construction!

Robins Idlers provide *extra economy,* too. That is due to such features as their patented One-Shot Lubrication and Triple Grease Seal. These enable Robins Idlers to roll longer . . . with less care and less grease!

Here's an additional fact to keep in mind when you buy a conveyor:

Hewitt-Robins is the only company in the world that assumes complete responsibility for both machinery and belting. Only Hewitt-Robins engineers builds and installs these elements as a single unit.

Whether you need replacement idlers for your present conveyor or an entirely new conveyor, insist on Robins Idlers. For full details, write Robins Conveyors Division, 270 Passaic Avenue, Passaic, New Jersey.

ROBINS IDLERS

ROBINS CONVEYORS DIVISION

These exclusive features of Robins Idlers save you money

One-Shot Lubrication

Cuts your lubricating time more than half. Assures thorough lubrication with only one walkway on your conveyor. No exposed piping subject to damage.

Triple Grease Seal

on Robins Roller Bearing Troughing and Return Idlers. Locks grease in. Keeps dirt and moisture out.

Rigid Truss Construction

End and center brackets, pulleys and pulley shafts form a single unified member that absorbs shocks and loads. Stronger than any other type of construction!

HEWITT-ROBINS HR **INCORPORATED**

Keep your Dragline Buckets on the job with

ESCO WORK-PROVED REPAIR PARTS

A swift return to the job and renewed production is possible when you use *ESCO* Manganese steel repair parts. These are designed to produce maximum payloads and to last on the job. They may be used with all standard makes of buckets.

Typical of these parts is the *ESCO* flat side drag chain. It is composed of solid cast links, made of shock and wear resisting manganese steel. They become harder and tougher with use. Extra steel is placed where greatest wear occurs. Designed for full surface contact, *ESCO* chains don't have to "take a seat."

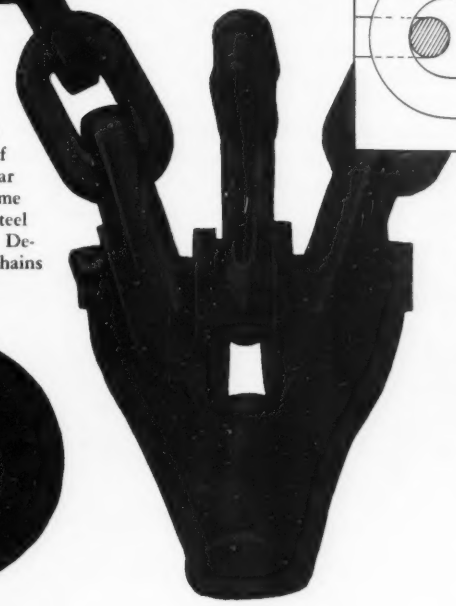

With conventional round link chain, contact is at one restricted point only, which wears chain rapidly and reduces strength.



Flat surface of ESCO links distributes wear over maximum area. With wear decreased correspondingly, chain outlasts other types.

Other *ESCO* Accessories for Greater Production

- Box-type Points and Adapters
- Hoist Chains
- Pear Links
- Rope Sockets
- Weld-on Tooth Points
- Spreader Bars
- Drag Cluster Rigging

ESCO Repair Links for Rugged Service

Simple in construction, and easy to use, *ESCO* hinge repair links are made of manganese steel, with a high alloy steel pin. They are flexible in use, with strength enough for severe service.

ESCO catalog 108H contains sizes, dimensions, and other detailed information on these accessories. Get your copy from your nearest *ESCO* office or use the coupon. Electric Steel Foundry, 2167 N.W. 25th Ave., Portland 10, Oregon; 716 Porter St., Danville, Illinois. Offices in Pottsville, Pa.; Eugene, Oregon; Chicago; Honolulu; Houston; Los Angeles; New York; San Francisco; Seattle; Spokane. In Canada, *ESCO* Limited, Vancouver, B.C.

ESCO

DIPPER AND DRAGLINE BUCKETS

ELECTRIC STEEL FOUNDRY
2167 N.W. 25th Avenue, Portland 10, Oregon
Please send catalog 108H to:

Name _____

Address _____ Zone _____

City _____ State _____

Use JOY AIR-POWER and TOOLS

for all-around best performance on DEMOLITION and FOUNDATION JOBS

JOY Portable Compressors and "Silver Streak" Air Tools make a highly efficient, time-and-money-saving team—the most modern units you can put on the job. They're light, compact and easy to handle, yet ruggedly built for real heavy-duty service. JOY Portables are available in seven sizes, ranging in capacity from 60 to 630 CFM at standard pressure. JOY Air Tools feature the exclusive "Dual Valve" that makes air do more work, plus cadmium plating for better lubrication, closer tolerances, and prevention of rust and scoring. • Let us show you how JOY equipment can reduce your costs, and produce more work per man-hour. *Write for bulletins, and ask for an actual demonstration.*

PAVING BREAKERS

JOY K-81, a rugged tool capable of sustained operation on the heaviest demolition work.

PORTABLE COMPRESSORS

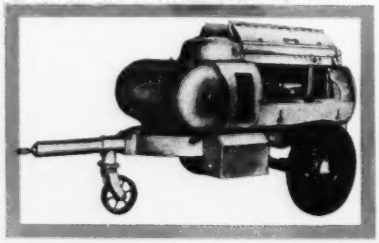



ROCK DRILLS

JOY L-47, a hard-hitting medium-weight tool that can drill to 10 feet in hard formation.

SHEETING DRIVERS

JOY Q-81, an adaptation of the K-81 for driving wood or light steel sheeting.

BACKFILL TAMPERS

JOY C-35, an easy tool to handle, yet delivers powerful blows for faster tamping.

SPADERS

JOY M-2, a light tool for digging in clay, shale, hardpan, or hard-frozen ground.

Consult a Joy Engineer

W&D C206C

JOY MANUFACTURING COMPANY

GENERAL OFFICES: HENRY W. OLIVER BUILDING · PITTSBURGH 22, PA.

IN CANADA: JOY MANUFACTURING COMPANY (CANADA) LIMITED, GALT, ONTARIO

For All Enduring Floors Use

Pittsburgh *Welded* Reinforcement

To guard against expensive cracking in concrete floors use Pittsburgh Welded Reinforcement. This strong welded wire reinforcement is designed to give your floors the strength they need for long service. For better floors specify Pittsburgh Welded Reinforcement. Send your inquiry to Pittsburgh Steel Products Company, Grant Building, Pittsburgh 30, Pa., or to our nearest office in Atlanta, Chicago, Columbus, Dallas, Detroit, Los Angeles, New York, Philadelphia, and San Francisco.

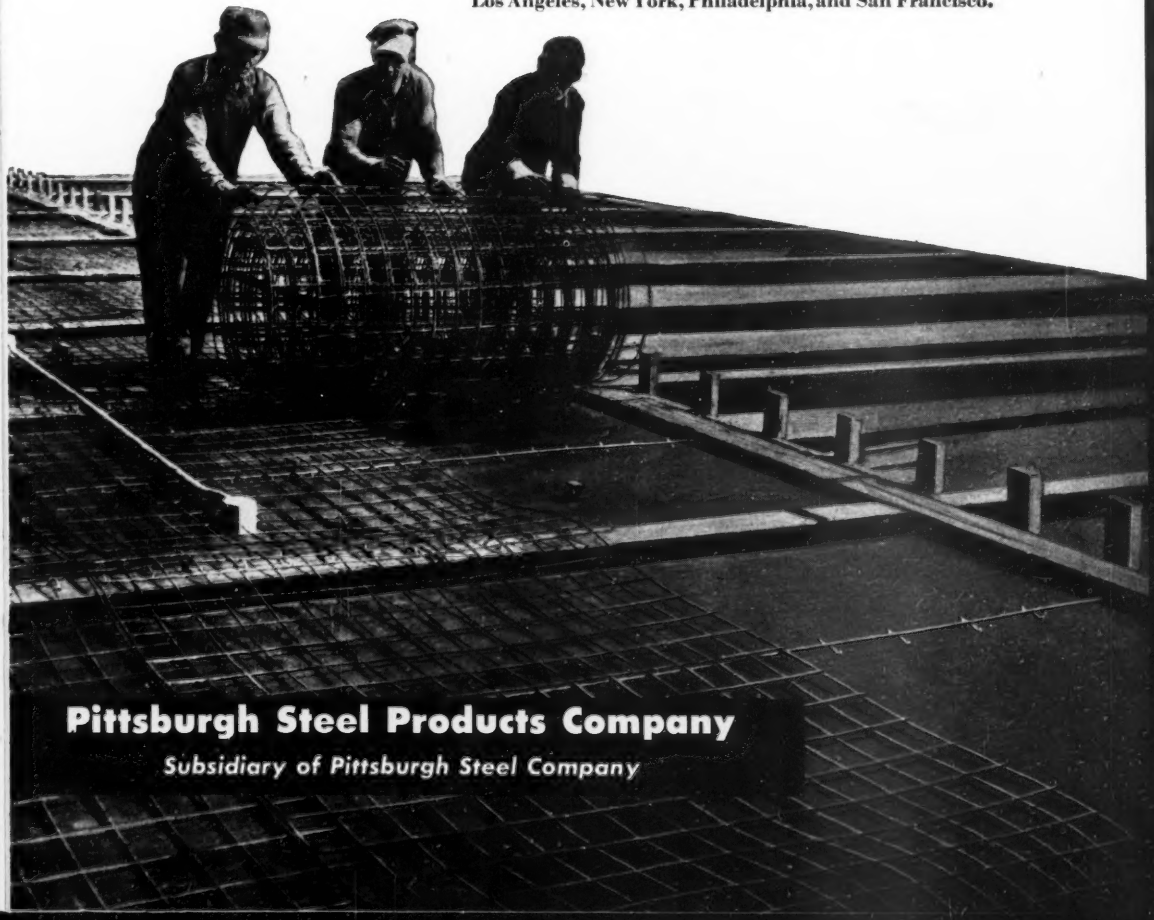

Pittsburgh Steel Products Company

Subsidiary of Pittsburgh Steel Company

GIANT Gelatins

ATLAS Gelodyns

ATLAS Gelatin

ATLAS Coalite

These ATLAS Products Make Possible The

ROCKMASTER

Blasting System

ATLAS Apex

ATLAS Amodyns

That Holds Down Blasting Costs!

MANASITE

ATLAS Extra Dynamite

ROCKMASTER Detonators

Equipment, explosives, blasting supplies, labor and drilling costs are up these days! But on many a blasting job, over-all costs are being held down by ROCKMASTER—the original milli-second delay blasting system pioneered by Atlas. ROCKMASTER, geared with the right explosive, makes possible outstanding savings through improvements in fragmentation and control of throw . . . and greatly decreased noise and vibration. This adds up to lower *over-all* costs!

ROCKMASTER is designed to "fit like a glove" these other Atlas developments that have made Atlas a leader in the field of explosives. Your Atlas representatives will be glad to show *you* how to make the most of ROCKMASTER advantages.

Rockmaster, Manasite, Gelodyn, Amodyn, Apex, Coalite—Reg. U. S. Pat. Off.

ATLAS EXPLOSIVES

"Everything for Blasting"

CHEMICALS ATLAS EXPLOSIVES

ATLAS POWDER COMPANY, Wilmington 99, Del. • ***Offices in principal cities*** • ***Cable Address—Atpowco***

Rough Service Needs Tough Tarps

Service conditions in the construction industry are *really* rough. That's why men who specify tarps look for duck that can stand up to the beating of daily use and still deliver top protection. And that's why Mt. Vernon Extra is a favored choice with them.

It's all in the way Mt. Vernon is made—produced from selected grades of cotton, under rigid laboratory controls, to a high degree of uniformity. For a sure shield against the weather—for duck that means savings on repair and replacement costs—specify Mt. Vernon Extra.

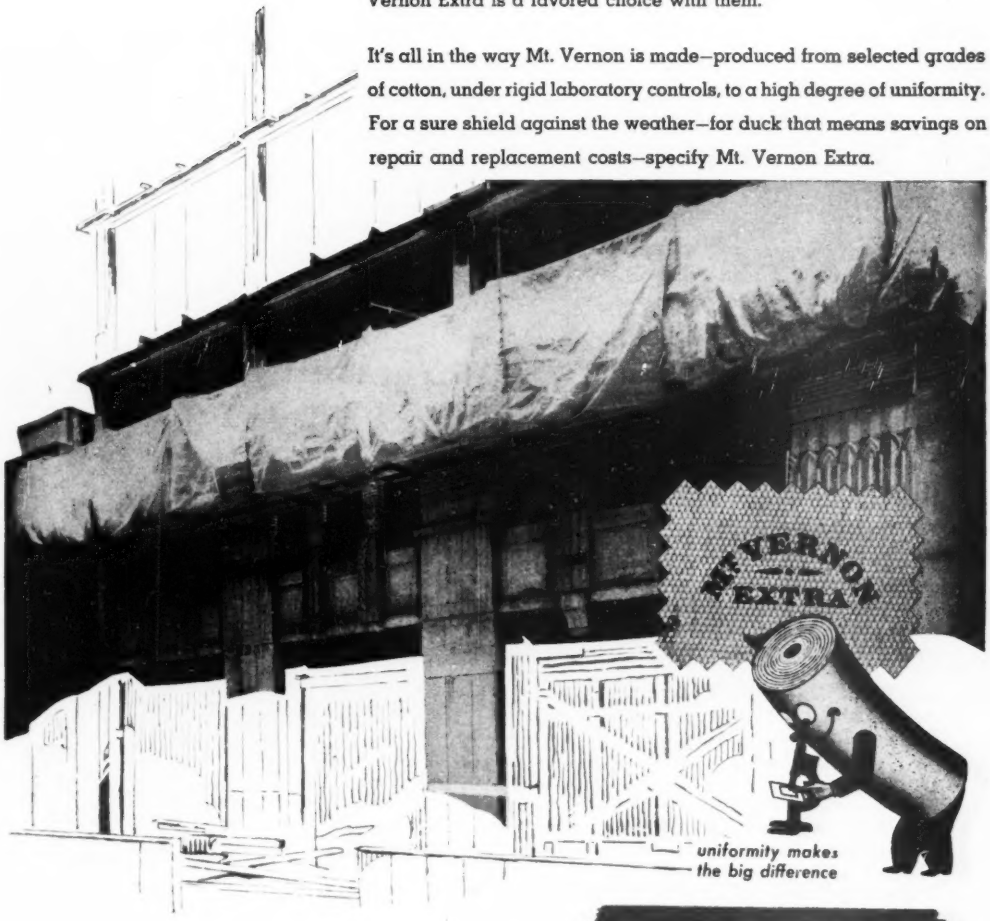

Mt. Vernon-Woodberry Mills

TURNER HALSEY
COMPANY
Selling Agents
40 WORTH ST. • NEW YORK

Branch Offices: CHICAGO • ATLANTA • BALTIMORE • BOSTON • LOS ANGELES • AKRON

"Our toughest tire job... and not one blowout!"

says Joseph F. White, Jr., President, J. F. White Contracting Co., Boston, Mass.

"UP TO 45 MILES PER HOUR ON THIS JOB WITH 13 TON LOADS AND NO TIME LOST...THANKS TO U. S. ROYALS!"

"On this New Elliott Bridge project, we're excavating 65,000 yards of peat from a salt water marsh and back-filling 80,000 yards of fill. Some of it is from distant locations. Speed and big loads make the difference on a job like this. And we're getting both . . . thanks to our U. S. Royal Lug Traction Tires."

U. S. ROYAL LUG TRACTION. Look at all the *extras* built right into this rugged tire:

- **SHARP MASSIVE LUGS designed to give you the most traction.**
- **LUGS and SHOULDER specially engineered to withstand bruising and cutting.**
- **STURDY CENTER RUNNING RIB means smooth-rolling—less driver fatigue.**

U. S. FLEET SERVICE. Your U. S. Royal Distributor is ready to draw up a tailor-made preventive tire maintenance plan designed especially for your operation—a plan which can give you lower cost per tire mile! He'll give you service where it counts—on your job! Call your U. S. Royal Distributor today. He's listed in your Classified Telephone Directory.

The finest tires you can buy are

U. S. ROYALS *by* U. S. RUBBER

U.S. ROYAL TIRES

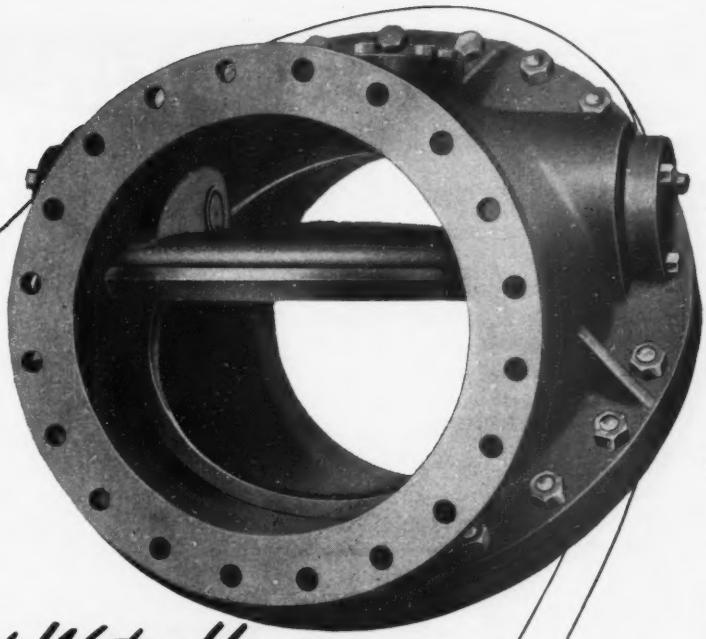

Prevent Water Hammer

with the "CUSHIONED CLOSING" of

CHAPMAN

TILTING DISC CHECK VALVES

Chapman Tilting Disc Check Valves *work with . . . not against . . . the stream.* As a result, destructive pipe line stresses are practically eliminated. Head losses, as compared with conventional type check valves, are reduced 65% to 80%.

This balanced disc rides smoothly on the flow. It lifts away easily when opening . . . closes quickly and quietly. There is no rubbing on the seat . . . no slamming. Hinge pins, seats and bearings wear far longer.

These are facts. Write today for engineering data and reports of tests. Valves available in either iron or steel.



Cross-section of the Chapman Tilting Disc Check Valve illustrating the way that the balanced disc is supported on the pivot, with arrows showing the travel of the disc. A feature of the design is that the disc seat lifts away from the body seat when opening, and drops into contact when closing, with no sliding or wearing of the seats.

The Chapman Valve Manufacturing Company
INDIAN ORCHARD, MASSACHUSETTS

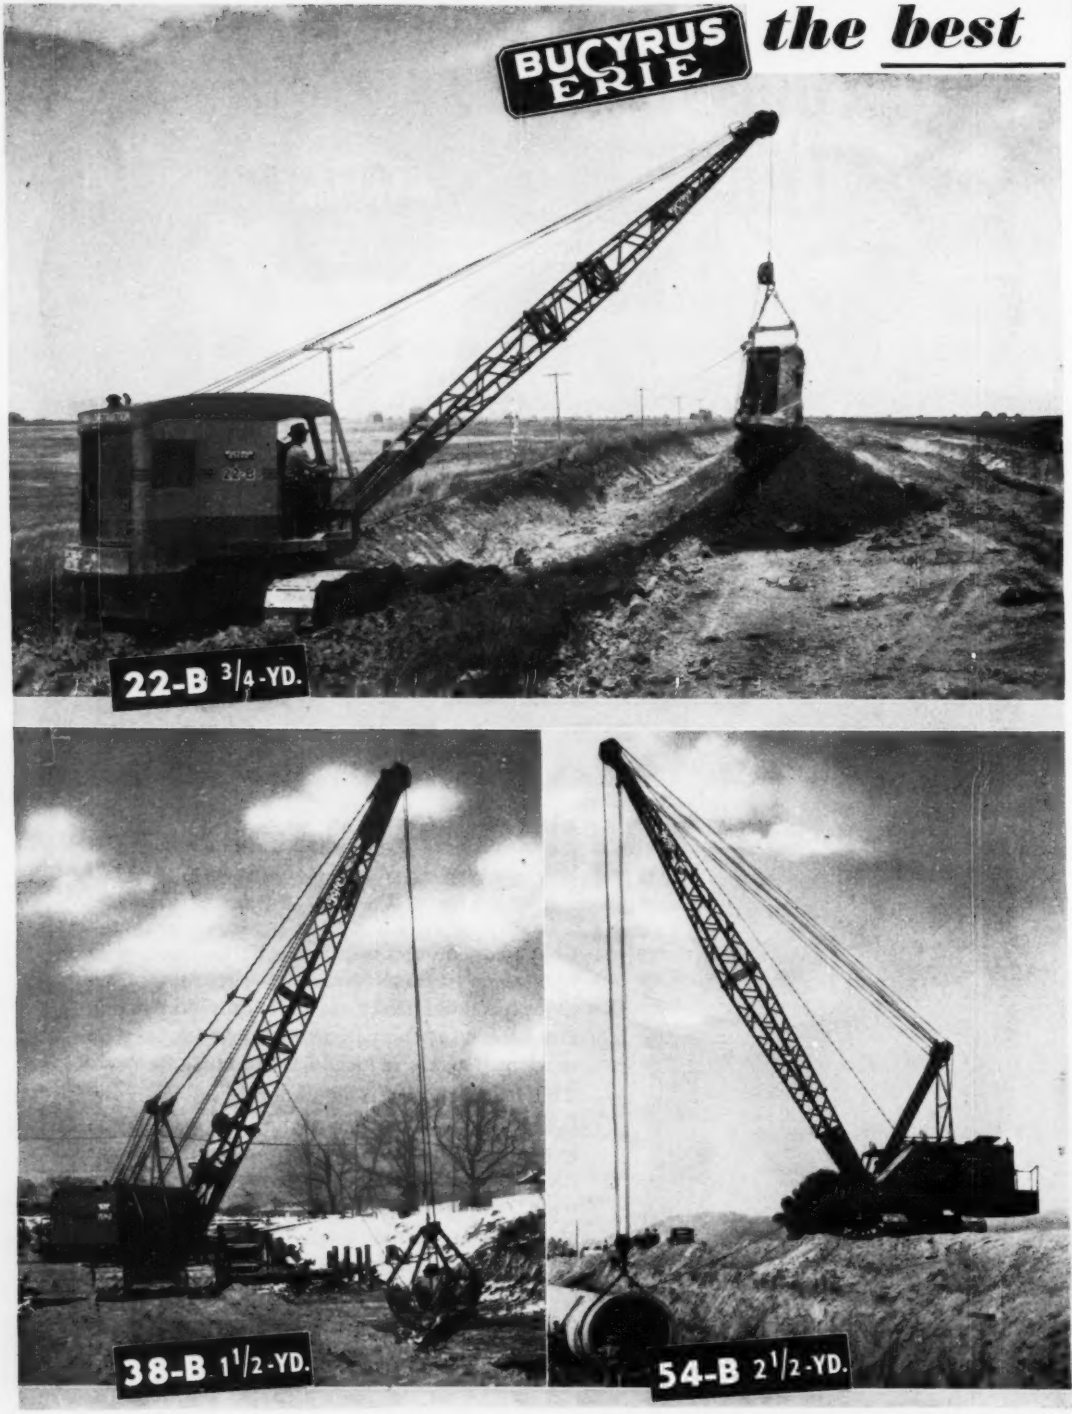
BUCYRUS ERIE
the best
22-B 3/4-YD.
38-B 1 1/2-YD.
54-B 2 1/2-YD.

buy in excavators because . . .

. . . they give you more of what you need to turn digging and lifting into profits!

you get GREATER OUTPUT

Each model is individually designed for its work range, with just the right combination of power, strength, and weight. Big cool-running clutches put the right amount of power where it's needed, are directly hand-set for greatest "feel". Low lever loads mean less operator fatigue, more passes per hour, faster pace all through the shift.

you get GREATER DEPENDABILITY

Your Bucyrus-Erie stays on the job because it's so simply constructed, so easy to keep in top operating condition. Every inch of shaft length works. Machinery is arranged for quick easy handling of lubrication and maintenance. Adjustments are simple, stay "put".

you get GREATER ECONOMY

The balanced, coordinated operating cycle that makes your Bucyrus-Erie tops in output also makes it economical to run. Repair costs are low because there's no overstressing of parts to cause trouble. Fuel costs are low because power units are "tailored" for excavator service, operate at speeds most favorable to smooth operation and economy.

you get LONGER MACHINE LIFE

Your Bucyrus-Erie works longer because it's built stronger. The steels used are developed in our own laboratories, the castings poured in our own foundries. Selective hardening and heat-treating processes are liberally used to put extra strength where it's needed. You get more years out of your Bucyrus-Erie because more years are built into it.

See Your BUCYRUS-ERIE DISTRIBUTOR

. . . for complete information on the Bucyrus-Erie you need.

BUCYRUS-ERIE COMPANY
South Milwaukee, Wisconsin

157E49

The Best Buy Bucyrus . . . The Best Buy in Excavators

HENDRIX DRAGLINE BUCKETS

COME BACK FOR MORE!

THEY'RE BUILT TO **TAKE IT!**

3 TYPES
FOR
EVERY DIGGING PURPOSE

⅜ to 40 Cu. Yds.

Built to slug it out on the toughest jobs, Hendrix Dragline Buckets are engineered to give dependable, economical performance that pays off in profitable operation. Hendrix Buckets are scientifically designed for maximum digging capacity . . . built for smooth, easy operation. And Hendrix Dragline Buckets can take the toughest punishment *and come back for more!*

If you're up against a difficult digging job, you'll want to learn more about HENDRIX BUCKETS . . . built to take it and built to give you low-cost, maintenance-free performance that means profitable operation.

HENDRIX *Lightweight* DRAGLINE BUCKETS

For descriptive literature, ask your dealer or write to

HENDRIX MANUFACTURING CO., INC.

MANSFIELD — LOUISIANA

FOR INDUSTRIAL USES

Better WATER SERVICE...

Better FIRE PROTECTION...

Better LONG-TERM ECONOMY...

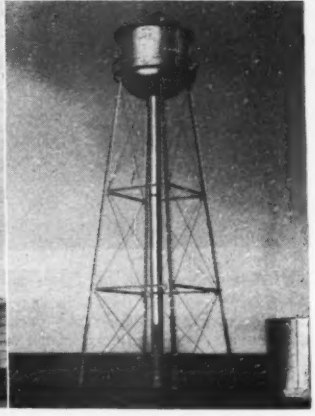

with

PITTSBURGH •DES MOINES

Elevated Steel Tanks

Completely dependable water service for general plant use—including storage of cooled water and other process applications—combines with ever-present fire protection to create immediate value in your Pittsburgh-Des Moines Elevated Steel Tank. Year-after-year durability and low maintenance costs are P-DM values that steadily enhance your investment. *May we give you the details?*

PITTSBURGH • DES MOINES STEEL CO.

Plants at PITTSBURGH, DES MOINES and SANTA CLARA

Sales Offices at:

PITTSBURGH	3414 Neville Island	DES MOINES	915 Tuttle Street
NEW YORK	Room 916, 270 Broadway	DALLAS	1219 Praetorian Bldg.
CHICAGO	1218 First National Bank Bldg.	SEATTLE	922 Lane Street
	SANTA CLARA, CAL.	621 Alviso Road	

IF YOU CAN READ THE

(YOU'LL BE INTERESTED IN THIS AD)

THE one thing most contractors don't like about insurance *is having to pay for it!*

Now, we can't do away with payments but we can make those unpleasant premiums smaller and smaller and smaller (enough smallers!)

For instance: We helped an Alabama contractor to reduce his premium rates from 28.7% above the average for the field to 6.9% less than the average!

We helped a Virginia construction company reduce their premium rates to 33.2% below the average for the field!

And so on . . . We can show you dozens of cases where Dat Ole Debbil, Premium, was cut down to size . . .

That's part of our Specialized Engineering Construction Service. We help you reduce accident hazards and you don't pay as much for protection.

So you pocket the money . . . and you buy yourself a yacht and a good cigar!

While we're helping reduce accidents and premiums, we show you ways to speed up work and cut down on lost time.

So you make more money . . . Have another yacht on us!

AMERICAN MUTUAL . . . the first American liability insurance company

© 1949 AMERICAN MUTUAL LIABILITY INSURANCE COMPANY

FIRST LINE . . . by Mr. Friendly

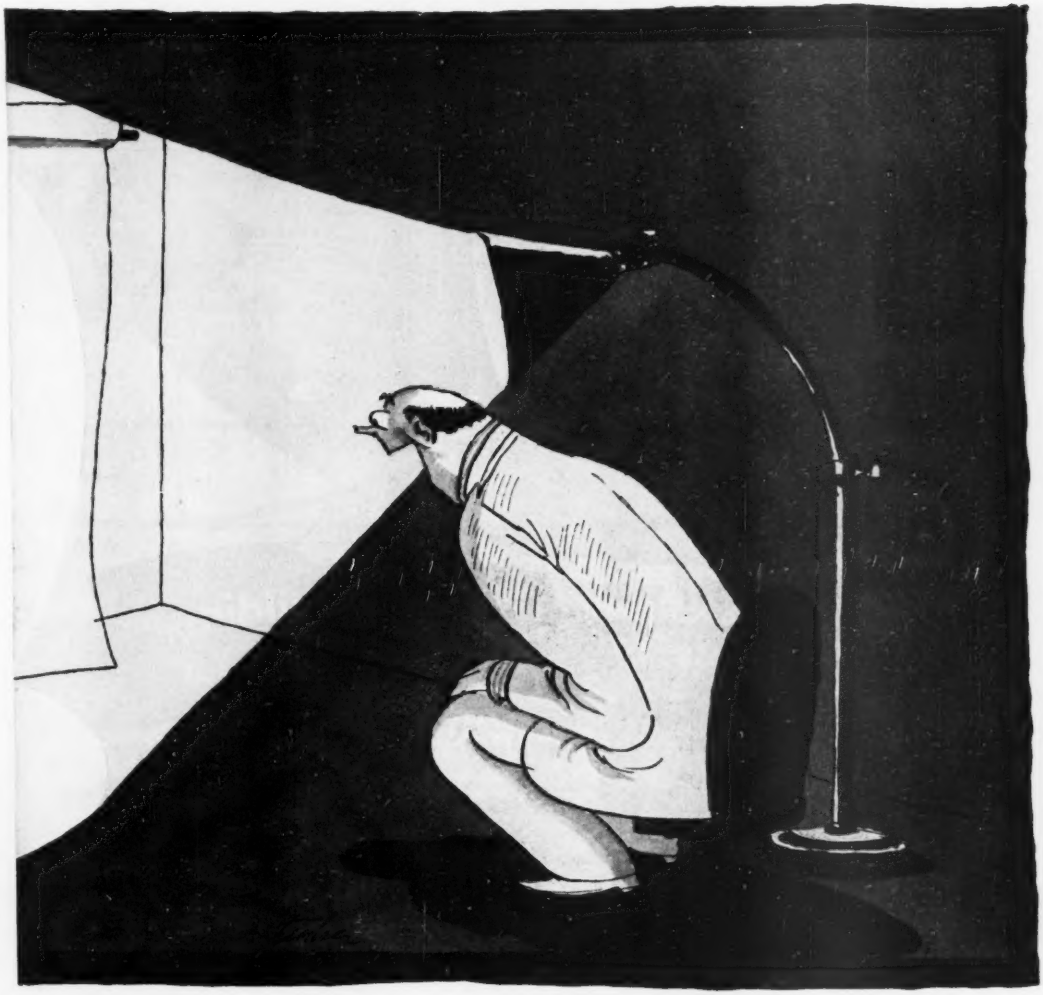

And all this service is included at no extra charge with every industrial policy.

But hold your breath! Here's the best part . . .

Despite rising costs (which you may have heard about), we still give you the chance to save through dividends! . . . up to 20 cents on every insurance dollar.

That's money, mazuma, wampum, do-re-mi, sheckels, the green folding stuff... That's what we save you more of at American Mutual!

P.S. Why not send today for 2 free illustrated text books, "Surface Construction without Accidents" and "Foremanship and Accident Prevention in Construction."

MAIL THIS COUPON NOW — WITHOUT DELAY!

Dept. 0-81, American Mutual Liability Insurance Co.
142 Berkeley St., Boston 16, Mass.

Without obligation, please *rush* to me more information on the All-American Plan, so that I may be richer and happier!

*Name*_____

*Street*_____

*City*_____ *State*_____

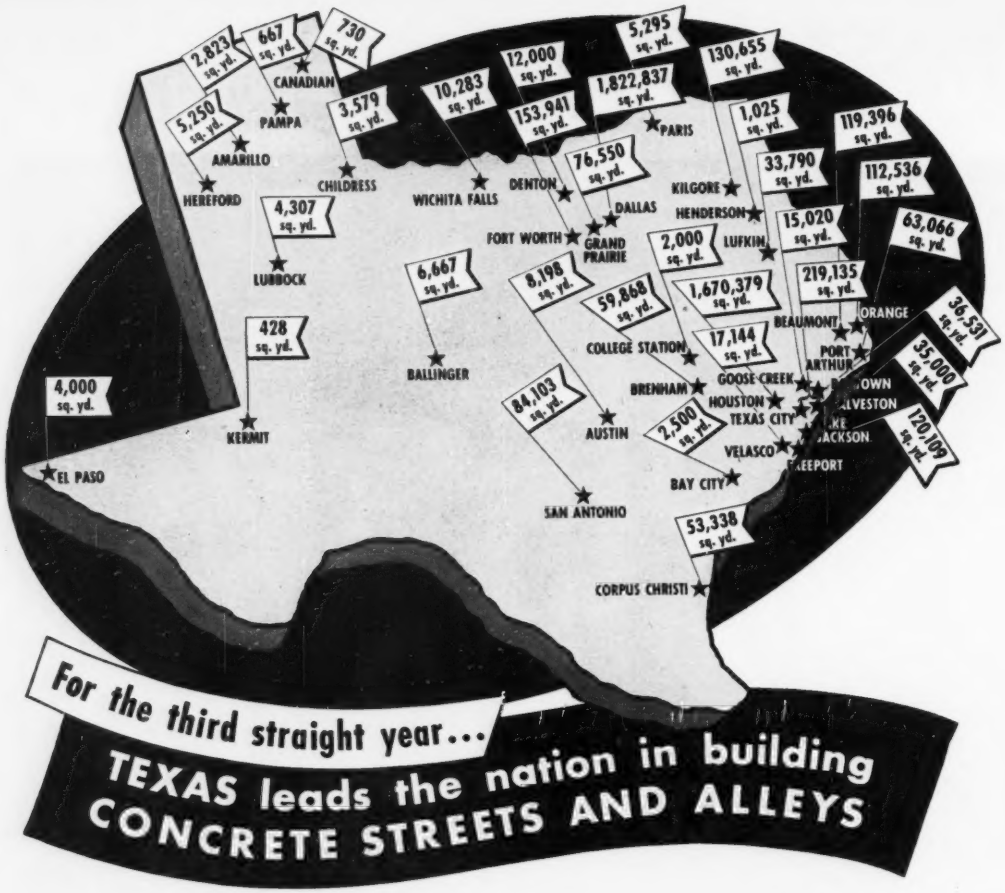

For the third straight year... TEXAS leads the nation in building CONCRETE STREETS AND ALLEYS

IN 1948, for the third consecutive year, Texas cities built more concrete streets and alleys than cities in any other state. This three-year leadership is the result of paving programs in 35 cities, whose individual yardage is shown on the map.

These cities, building for the future, have placed the following yardage of long-lasting, economical concrete pavement in the last three years:

1946	853,019 sq. yd.
1947	1,657,782 sq. yd.
1948	2,382,349 sq. yd.
Total	4,893,150 sq. yd.

If this tremendous yardage of durable concrete pavement were placed in one continuous 20-foot highway it would extend nearly 420 miles—from Laredo to Fort Worth or Dallas. This program demonstrates a state-wide recognition of concrete as the pavement that serves taxpayers and motorists best over the years.

In other states hundreds of progressive cities are also building durable streets—and saving taxpayers money—by paving with concrete. Concrete is ***low-annual-cost*** pavement because it usually costs less to build than any other pavement of equal load-carrying capacity, costs less to maintain and lasts longer.

Concrete streets and alleys are easier to keep clean. They are easier to illuminate. They are much safer. Write today for a free copy of "*Design of Concrete Pavements for Municipal Streets.*" Distributed only in the United States and Canada.

PORTLAND CEMENT ASSOCIATION

Dept. A4b-17 33 WEST GRAND AVENUE, CHICAGO 10, ILLINOIS

A national organization to improve and extend the uses of portland cement and concrete through scientific research and engineering field work

PROOF POSITIVE

OF HIGHER ACCURACY . . . LOWER LOSS

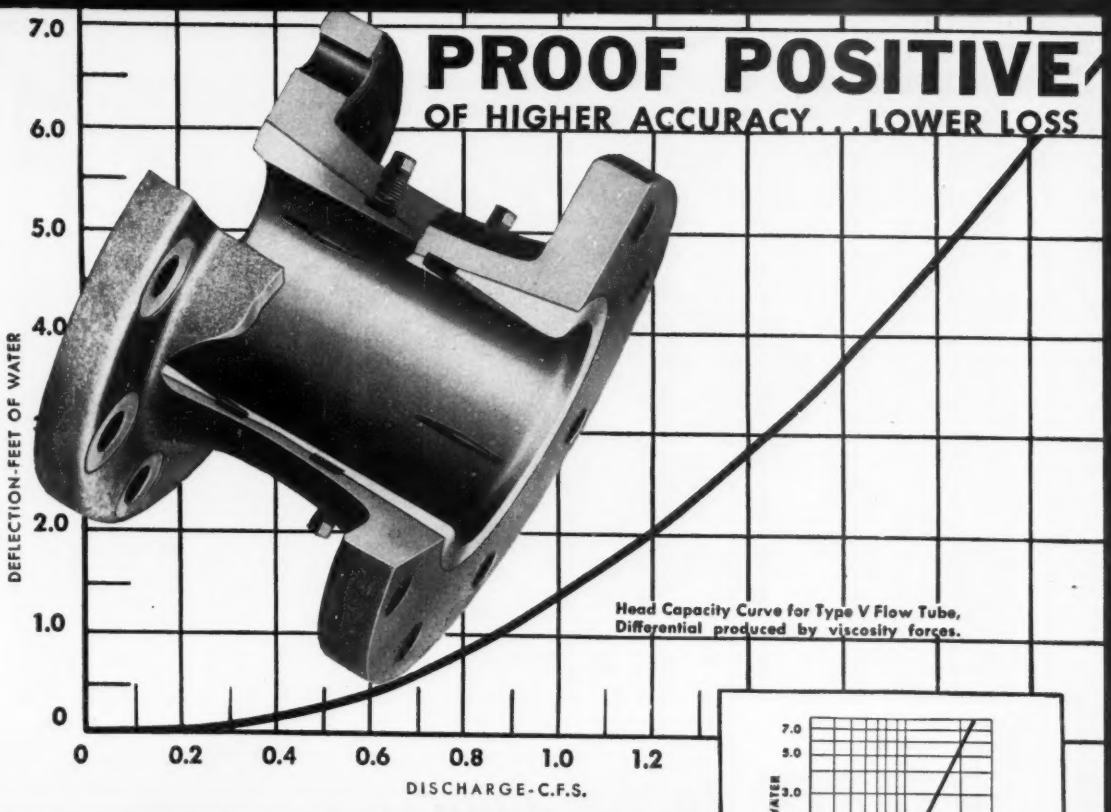

Head Capacity Curve for Type V Flow Tube, Differential produced by viscosity forces.

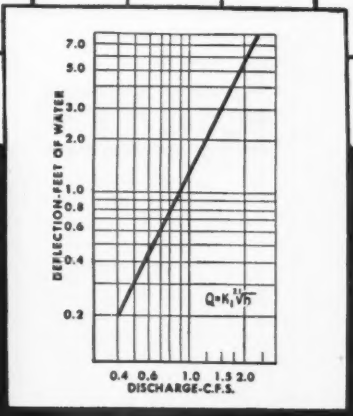

Log Plot of Head Capacity Curve.

NEW BETHLEHEM FLOW TUBE*

PROVES CONSTANT COEFFICIENT OVER 8:1 RANGE OF DISCHARGE

Now! The new Bethlehem Flow Tube—for large savings in power . . . higher product quality . . . large installation savings—offers proof positive of consistent accuracy.

In calibration tests conducted by an independent hydraulic laboratory—one of the foremost in the country—the Bethlehem Flow Tube held its high accuracy to the limit of the testing apparatus. Discharge plotted against head proved that differential head is in all cases proportional to a constant power of velocity . . . that discharge coefficient is constant over *an 8:1 range of discharge.*

Add to this: one pipe diameter length . . . negligible resistance to flow in most installations . . . minimum straight run limitations after elbows and similar fittings . . . measurement of gases without consideration of compressibility factors and the Bethlehem Flow Tube becomes an outstanding improvement wherever it is necessary to measure or control fluid flow

Find out the details of its revolutionary operation now! Write for the folder, "Bethlehem Flow Tube."

*GENTILE PATENTS

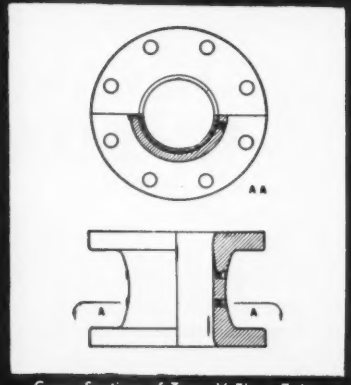

Cross-Section of Type V Flow Tube. Pat. No. 2,260,019. Other patents pending.

BETHLEHEM FOUNDRY & MACHINE CO., BETHLEHEM, PA.

GEARED to the Concrete

The deep, reversed, double-helical ribs of Inland HI-BOND reinforcing bars grip the concrete with an interlocking action that provides unequaled bonding strength.

Engineering tests have proved that straight embedments of HI-BOND have a greater bonding effectiveness than bent-bar anchorages of ordinary deformed bars. And, with ordinary bars, the low bonding strength of the bar has always been the weak link in the structure—the bar would slip before the steel or concrete could be fully loaded. With its high bonding strength, HI-BOND bars make it possible not only to use more of the potential strength of the steel but also to take advantage of the higher compressive strength of present-day concretes. As a result, HI-BOND is leading the way to radical revisions in present building codes.

The present demand for HI-BOND greatly exceeds our ability to supply it. However, to make larger tonnages available to you, we have licensed other steel companies to make this superior bar. Write for booklet.

INLAND STEEL CO., 38 S. Dearborn St., Chicago, Ill.
Sales Offices: Chicago, Davenport, Detroit, Indianapolis, Kansas City, Milwaukee, New York, St. Louis, St. Paul.

INLAND
HI-BOND
Reg. U. S. Pat. Off.

INLAND STEEL

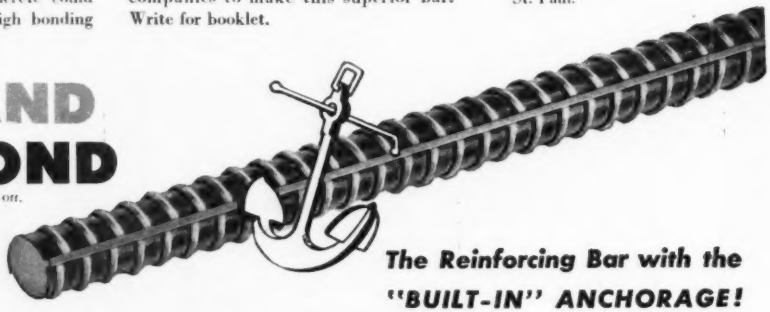

The Reinforcing Bar with the "BUILT-IN" ANCHORAGE!

OTHER PRODUCTS: BARS • STRUCTURALS • PLATES • SHEETS • STRIP • TIN PLATE • FLOOR PLATE • PILING • RAILS • TRACK ACCESSORIES

CONSTRUCTION TRENDS

HOW SCHOOL ENROLLMENT WILL BOOM

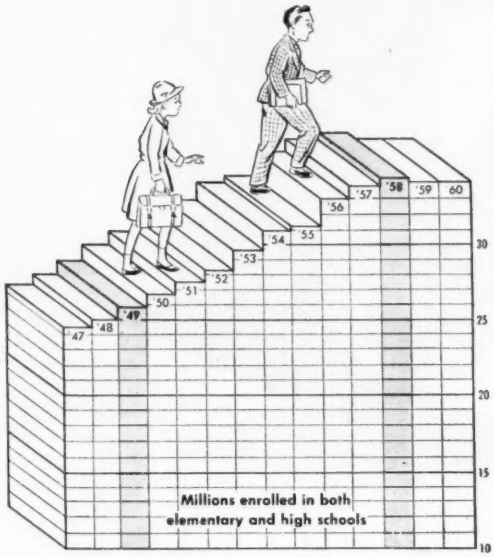

Boom in babies booms construction

Twelve billion dollars—$1 billion to be spent each year until 1960—is needed for a school expansion program, according to the American Association of School Administrators.

Overcrowding in existing schools and the prospect that there will be 10,000,000 more youngsters in school in 1958 than there are now, have made school construction one of the nation's emergency needs.

The AASA survey is the third by a national organization to be completed recently—and all three are in substantial agreement as to the need. A month ago the Office of Education of the Federal Security Agency reported that its figures indicate a need for $11 billion in new school construction (ENR March 17, p. 85), and last week the NEW YORK TIMES reported a need for $10 billion in new schools, after its own nation-wide check.

In New York City an investigating committee found a "major educational crisis" on which the city will have "to act and act fast". The jump in the city's birth rate during the war and postwar years will bring another 215,000 youngsters to swell the ranks of the children now crowding the city's schools. To meet their needs, the committee recommended adding 153 public elementary schools in the next five years. Later the wave of babies will flood into high schools, and the city will need another building program.

For the country as a whole, the National Education Association has estimated that one out of every five city schools is now badly overcrowded. This condition holds for all types of schools in all areas. Percentage of overcrowded schools among all schools ranges from 15 percent in junior high schools to 21 percent in senior high schools. New England and the Middle Atlantic states have the lowest proportion of overloaded schools —9 percent—and the Far West the highest, 31 percent. Those schools which are overcrowded on the average have 31 percent more students than they were built to handle.

Moreover, many school buildings are old and rickety. About 80 percent of all schools were built before 1930; 20 percent date back before 1899, and 2 percent go back to 1870 or more—almost to the Civil War.

That communities are beginning to do something about their schools—replacing fire-trap buildings and expanding systems—is shown in construction reports. This year about $700 million worth of public educational construction is expected to be put in place—about seven times as much as was done in 1946. But, obviously, a much bigger job must be done.

New ideas in schools

New York has proposed something new in school construction to meet the special needs of the 1950's—temporary buildings. School buildings almost everywhere are now built to last 50 years. But the birth rate, which jumped during the 1940's, will taper off. As that happens, school systems built to handle the rush of war and postwar babies, will find themselves over-expanded in the 1960's. So New York will build schools designed to last only a decade or so. Many other communities will meet the problem by keeping 50-year old schools in service and then tearing them down when the flood of students subsides 10 or 15 years from now.

Mass housing projects are giving New York, and other big cities, special problems. In the past, neighborhoods have grown only slowly. But with the coming of superhousing projects, the number of kindergarten-age youngsters in an area may jump 10 times in one year. That, obviously, calls for better coordination between builders and city authorities.

All this means new business for contractors. With schools becoming a number one problem for municipal authorities, the volume of school construction in many areas will multiply in the next five years.

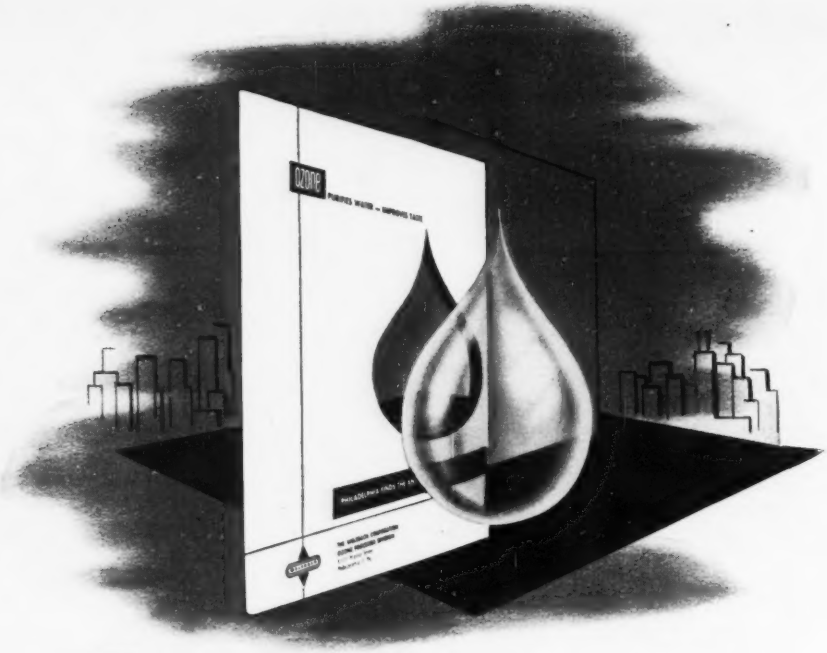

Philadelphia finds the Answer

FOR BETTER WATER—WITH *Ozone!*

Installation of the world's largest Ozone plant is Philadelphia's answer to overcoming taste and odor problems in water drawn from *surface supplies.* This is one of the first major steps in this city's progressive, long-range water improvement program.

This new Ozone installation in the Belmont Filtration plant in Philadelphia currently treats about 36,000,000 gallons daily with an ultimate capacity of 70,000,000 gallons a day. It was designed, built and installed by The Welsbach Corporation after two years' of extensive tests demonstrated the efficiency and effectiveness of the Ozone process in producing high quality drinking water . . . pleasant in taste and odorless . . . at reasonable costs.

Do you have a taste, odor or color problem in your water supply system?

Philadelphia's answer through the Welsbach Ozone Process can be your answer, too!

Write today for the Philadelphia story on Ozonation at the world's largest Ozonation plant. The booklet, "Philadelphia Finds the Answer," will be gladly sent you.

THE WELSBACH CORPORATION
OZONE PROCESSES DIVISION

1500 Walnut Street
Philadelphia 2, Pa.

THE CONSTRUCTION WEEK

ICE HARBOR ON ICE?—Determined to keep Congress from putting their pet $86,000,000 Ice Harbor Dam project in the appropriations icebox, Northwest river interests and public and private power advocates are joining forces. Action of the House Appropriations Committee in cutting the project out of the Army's new appropriation request (ENR March 31, p. 23) brought immediate charges from the Inland Empire Waterways Association that opposition by the U. S. Fish and Wild Life Service—not economy alone—was largely responsible for congressional frowns. Proponents contend that the dam (on the Snake River below Lewiston, Idaho) would be finished a year before McNary Dam, and would contribute immediately to relieving a current power shortage.

ALLOCATIONS OUT?—Washington agrees that the bloom is definitely off the steel allocations rose—and with it has gone President Truman's chance of getting any mandatory control legislation. Until a month ago, steel consumers were fighting for supplies, but now half the users who hold priorities (including the Army, Atomic Energy Commission, freight car builders) are willing to take less, and others have shown a tendency to shop around for a price. Effective in June—a two-month lag is allowed to permit delivery to catch up with orders—eight of the 17 users now in the allocation program will be cut as previously announced (ENR March 31, p. 19), and one—for steel houses—will have run out with the user winding up with a surplus.

EVIDENCE OF AID—French power development benefitted to the tune of 36 billion francs ($100 million) from ECA aid during 1948. This is about a quarter of the total aid granted France. About 7 billion francs went into steam plants, the remainder into hydro projects—the works on the Rhone (Genissiat and Mondragon) received 4 billion francs. Continued high investment in hydro power is certain in France, where nearly 50 projects are in various stages of construction.

EASY ON POINT 4—The administration apparently is going to ease into implementation of the President's Point 4—his proposal for an "up by the bootstraps" world development program. Committees now working on the proposal are likely to recommend an additional appropriation of $50,000,000 for the first year. Added to the $30,000,000 already in the 1949-50 budget, this would bring to $80,000,000 the amount available for technical aid. For the present at least, no new agency will be set up—four major groups will handle spending the money: The UN, ECA, Institute of Inter-American Affairs, and the Interdepartmental Committee on Scientific and Cultural Cooperation.

MORE TAXES LIKELY—Speaking of money, the latest pulse-feeling among Congressmen indicates that the legislators will bring out a new tax bill that will up collections by about $2 billion—but they'll probably make it effective next January, rather than July, to give business a chance to decide whether its going to go up, down, or hit something like normalcy. So far, budget-cutting has snipped a bare $250 million off a $41.9 billion budget, and collections are falling behind last year.

WAIT FOR IT—A month ago, the AGC's highway division took occasion to deplore the slow pay practices of some governmental units for highway work, and hoped for betterment through speedier pay and percentage reduction (of high percentages withheld pending completion of contract). But last week, pressed by a shortage of working capital, the city of Detroit told contractors they will not be paid until work has been completed, and special assessment bonds have been sold. Previously, partial payments were made as work progressed, and the time of payment had no connection with sale of assessment bonds.

WAY OUT—Pennsylvania legislators believe they have found a way out of the dilemma of building new state buildings without a general increase in taxes. Governor Duff signed a new law creating a State Building Authority, with power to issue bonds up to $175 million, that would build state buildings and lease them to the state—using rentals to retire the bonds.

TOO GOOD—A combination of better-than-expected construction progress and a tight budget has left the status of Davis Dam on the lower Colorado River hanging on the speed with which Congress can agree on and put through a deficiency appropriation. The Utah Construction Co. broke all Bureau of Reclamation records by placing 730,000 cu.yd. of fill in 30 days recently—but this progress helped use up all the available money. A deficiency bill was rushed through the House and has already been reported out by the Senate Appropriations Committee, but best estimates on passage of the message are ten days (from April 4).

more free sunlight and fresh air for Elsie

Below: Exterior and interior views of the Borden Co., Plant at Oklahoma City. Truscon Pivoted, Commercial Projected, Architectural Projected and Intermediate Casement Windows, Screens and rack and pinion operators used throughout. The Austin Company, Designers and Contractors.

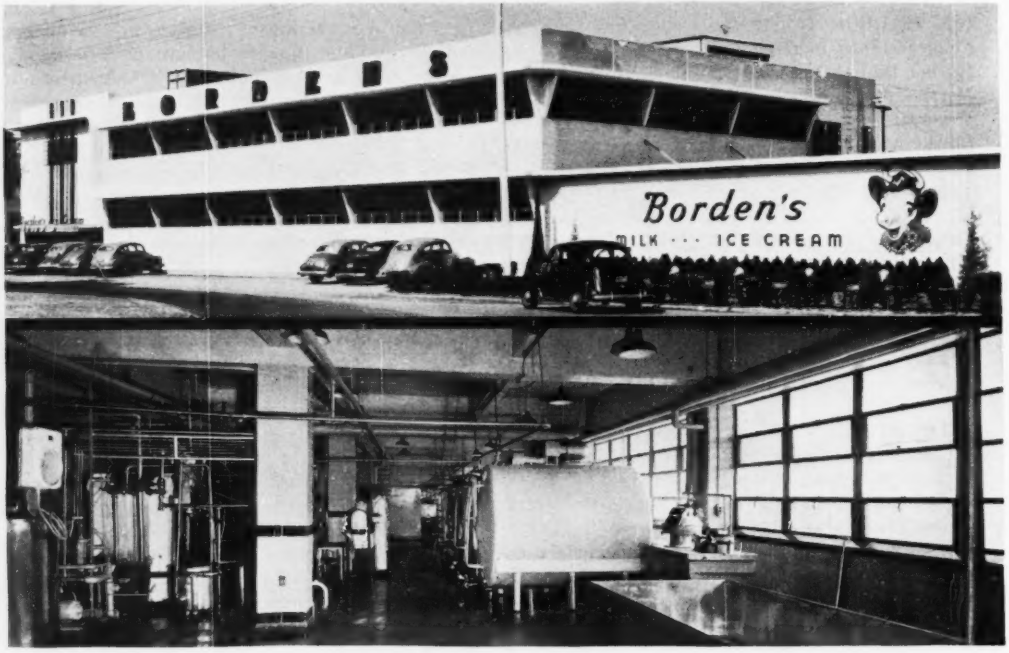

with Truscon Steel Windows

Borden's milk products are famous for healthful quality and cleanliness!

Look at the plants they're produced in . . . like this one at Oklahoma City. And look at the light-giving, easily ventilated windows that aid the well-being of both the milk products and the dairy workers inside the plant!

This Oklahoma plant is completely equipped with Truscon Steel Windows—Truscon Pivoted Windows, Truscon Commercial Projected Windows, Truscon Architectural Projected and Truscon Intermediate Casement Windows . . . also Truscon Screens, and rack and pinion operators!

Truscon Steel Windows are permanent and fire-resistant; they never stick, shrink, warp, or fail to operate easily, regardless of climatic conditions; they provide adequate and proper ventilation; and their slender but strong muntin bars admit the maximum of light to the interior.

Truscon Steel Windows are adaptable to all types of industrial and commercial buildings, including warehouse, factory and storage buildings, garages, filling stations, and a host of other installations.

The architectural correctness, substantial hardware, ease of installation, economy and low upkeep of Truscon Steel Windows will be of help to you in your planning. May we send you a complete new catalog of Truscon Steel Windows?



Truscon Commercial Projected Window

Pivoted Window Push Bar Hardware

Truscon Architectural Projected Window

Truscon Steel Intermediate Casement

New Literature.

Send for new catalog complete with installation details and specifications on Truscon Steel Windows for every type of residential, commercial and institutional use.

Truscon Steel Company • Youngstown 1, Ohio

Subsidiary of Republic Steel Corporation

Those Needed Schools

THREE independent surveys—one by this journal, one by the Bureau of Community Facilities, and one by the NEW YORK TIMES—are in good agreement that the U. S. needs something like $10 billion worth of new schools. It seems pointless to belabor this fact with new statistics—as pointless as further checks on the need for more and better highways or sewage systems. Not quite so pointless is an attack on school building costs. Fundamentally, any such sum as $10 billion can be supplied only through a major change in our taxing system, whereby more funds can be made available to the school boards. In the meantime, however, if the cost of school building could be reduced, some communities would go ahead. The New York State Education Department has started in the right direction with a campaign favoring the elimination of deluxe items and the general simplification of school designs. In New York City, a contractors' committee has been established to assist the Board of Education in its building plans. Architects in some instances have instituted a special type of service whereby they will survey school needs and give advice on locations and required size and type of buildings to aid school boards in their preliminary planning. Many similar measures directed toward cutting school building costs, are going to be required if those needed schools are going to be built.

•

Panel Construction Can Cost Less

ACCEPTANCE of panel construction for buildings seems to be growing by leaps and bounds. One application—to wall construction—is described on p. 73 of this issue, for a case where insulated cellular panels were used with a stainless steel facing and carbon steel backing. There are many other examples, involving different facings, backings and insulation. Shop-fabricated for efficient production and quality control, these "sandwiches" are designed for speedy erection, with workmanship and uniformity too costly to obtain with conventional wall types assembled in the field.

Similar construction is also used for floors and roofs. But the purpose is generally the same: to save time and money by using thin, light-weight, large-size panels having adequate structural, architectural and thermal properties.

There are also many indirect benefits. Job cutting and waste are kept to a minimum. Masonry debris, mortar spillings and clean-up work normal to ordinary floor and wall construction are completely eliminated. Floors can be installed as fast as the framework goes up, and a working platform is available for all trades from the moment the panels are placed.

However, panel construction could be even less expensive. As one manufacturer points out, if the product could be standardized on a certain limited number of sizes, the price per unit could be reduced at least 25 percent. Architects and engineers could help bring prices down for panel construction by asking the manufacturers to standardize and by using only standard sizes.

The Engineer Decides!

THE RECENT DECISION of the Cook County Superior Court casting aside an injunction brought by a taxpayer's suit and permitting use of porous-plate diffusers designed by experts of the Sanitary District of Chicago will hearten consultants as well as municipal officials. Too often responsible engineers are harassed by court actions attempting to force adoption of equipment or processes sincerely believed neither to afford the best solution to a particular problem nor be in the best interest of the municipality. The Chicago decision strengthens the basic right of qualified engineers to make technical decisions based on their investigations, experience and judgment. It also underlines the professional impropriety of attempting to compel acceptance of unwanted, undesirable or questionably applicable products.

Gifts of Land for Highways

THIRTY-ONE PROPERTY OWNERS in Middlesex County, New Jersey, have deeded to the state for the nominal fee of $1 the land needed to widen state highway No. 25 from a two-lane to a four-lane divided highway. That is a very practical way to express public spirit.

In making public a list of the people who took this unusual action, State Highway Commissioner Spencer Miller Jr. said: "Those who are extending such willing aid so generously are contributing to an improvement that will remove one of the most dangerous sections of major highways in the United States. Their action is in contrast to the excessive demands made at times by property owners where a public improvement is made."

Doubtless there are many citizens in other states who would take similar action if such a plan were put up to them as an opportunity for public service that will be properly recognized. But movements of this kind need a bit of diplomacy to get them started and then some showmanship to dramatize the action. Good newspaper publicity helps. Signs along the widened highway saying that the adjoining landholder gave the land for the widening would also be useful. The work involved should pay dividends in better public relations for the state highway department as well as in the savings for the taxpayer.

NIGHT DRIVING MADE SAFER!

with

ATLAS WHITE REFLECTING CURB

A smooth curb wastes the car's headlights. It reflects light away from the driver. Edge of road is difficult to see. Driving dangers are increased.

Difficulty in defining the road ahead is one of the main hazards of night driving. This danger is minimized on a highway edged with White Reflecting Curb made with Atlas White Cement. The saw-tooth faces of reflecting curb catch the headlight rays and reflect them *back to the driver*. This makes the curb . . . the road's edge . . . highly visible. And because water makes the curb even more mirror-like, visibility is even better on rainy nights.

Day or night . . . dry or wet, traffic flows smoothly and safely on roads with White Concrete Reflecting Curb. Send for further information. Write to Atlas White Bureau, Universal Atlas Cement Co., (United States Steel Corp. Subsidiary), Chrysler Bldg., New York 17, N. Y.

AT NO EXTRA COST

All the advantages of air-entraining portland cement—resistance to effects of freezing-thawing weather and scaling action of de-icing salts, easy placement, greater durability — now available. Ask about

ATLAS WHITE *DURAPLASTIC

**Duraplastic is the registered trade mark of the air-entraining portland cement manufactured by Universal Atlas Cement Co.*

White Concrete Reflecting Curb utilizes the car's headlights. Saw-tooth faces mirror the light back to driver, form a continuous, bright ribbon of light at the road's edge. Driving is safer.

ENR-RM-88

ATLAS WHITE CEMENT

For White Concrete Reflecting Curb

"THE THEATRE GUILD ON THE AIR"—*Sponsored by U. S. Steel Subsidiaries—Sunday Evenings—ABC Network*

ENGINEERING NEWS-RECORD

APRIL 14, 1949 VOL. 142 NO. 15

Senate reorganization bill offers Army no exemption

Single vote keeps Army civil works from special treatment in Senate reorganization bill — Administration seen ignoring Hoover Commission's proposal to cut out FWA

A one-vote margin in Senate committee prevented the civil functions of the Corps of Engineers from getting special exemption in the Government Reorganization Bill reported to the upper house last week.

As submitted to the Senate by its Committee on Expenditures in the Executive Departments, the bill (S. 526) contains no exemptions and no requirements for "one package" treatment of departments or agencies.

The measure does have one catch—veto power by either house of Congress—calculated to snag any presidential reorganization plan that fails to win the support of both the Senate and the House. Chairman McClellan of the Senate Expenditures Committee feels sure this provision is enough to stop any proposal for transferring Army civil functions to the Interior Department—as recommended by the Hoover Commission (ENR March 24, p. 9)—or to any other agency.

Even so, the chairman took no chances. He offered an amendment in committee to exempt Army civil works, and his proposal lost by a bare five to four vote. Other restrictive amendments that would have the effect of excluding certain agencies—such as the national military establishment—from any general reshuffling of the executive branch were likewise rejected by the committee.

Senate bill exempts military

In this respect, the Senate bill appears to be an improvement over H. R. 2361 as passed by the House (ENR Feb. 17, p. 45). The House measure stipulated that the President could not include the Department of National Defense—or six other named agencies—in any general reorganization plan. A separate proposal would be required for each of these units. The Senate committee refused to include any such restriction in its bill.

Another less serious limitation was added by the Senate committee: To permit review of the authority granted by Congress, the bill allows the President to submit reorganization plans only until April 1, 1953. The House measure contains no time limitation.

Eight weeks may pass before the Senate can act on the committee's bill. After the Senate has passed its bill—undoubtedly with some amendments—the House and Senate measures will go to a Joint Conference Committee for reconciling differences.

Another House bill restriction was eliminated by the Senate group. The committee refused to prohibit the creation of new departments—headed by secretaries with cabinet rank—in reorganization plans submitted by the President.

Meanwhile there were other indications that the Administration was not planning to go along with all recommendations of the Hoover Commission. In its reports to Congress, the commission had proposed dismemberment of the Federal Works Agency, transferring public roads to Commerce and public buildings and community facilities to Interior.

Last week, Administration support was reported for a bill that would assign the procurement and disposal of government property to FWA. The plan involves transfer to FWA of the Bureau of Federal Supply and the War Assets Administration.

A bill to that effect is now before the House committee on expenditures. Hearings are being held by a subcommittee. The measure is substantially the same as one introduced in the last Congress and reported favorably by the Senate expenditures committee, but never voted on by either chamber.

As another boost for FWA, the Senate has passed a bill (S. 714) authorizing $40,000,000 for site acquisition and planning for federal buildings—postoffices, courthouses and the like. The House public works committee has favorably reported a similar measure (H. R. 3662).

Purpose of these bills is to have sites and plans ready for public building construction when needed. The measures include $30,000,000 also for repair and modernization of existing buildings. Activities would be directed by the Public Buildings Administration.

House committee OK's $65 million UN loan

Funds for a $65,000,000 loan to the United Nations are recommended in the second deficiency bill for fiscal 1949, favorably reported last week by the House Appropriations Committee. The loan—to finance construction of the UN headquarters building in New York—was authorized by Public Law 903, signed Aug. 11, 1948.

In the same deficiency bill is a recommended appropriation of $110 million to the Atomic Energy Commission for construction. The amount is needed to liquidate contract authority granted AEC in the Independent Offices Appropriation Act, 1948.

Total contract authorization given AEC at that time amounted to $400 million. Appropriations totaling $250 million have been made toward covering this authority. AEC has incurred contract obligations of $396 million.

N. C. State to offer B. S. in construction

North Carolina State College school of engineering at Raleigh next September will offer to qualified students a curriculum which will lead to the degree of Bachelor of Science in Construction.

"Students receiving this degree will fulfill the great need in North Carolina for men trained with a background of engineering, but yet not requiring the intensive engineering education given to those who are currently enrolled in the school of engineering," said Dean J. H. Lampe in announcing the course.

Prof. C. R. Bramer, acting head of the college's civil engineering department, claims the curriculum is "set up as a program of study that will integrate engineering, administration, job management, labor relations, and construction methods and practice."

NEWS BRIEFS

Dams — Allis-Chalmers Mfg. Co., Milwaukee, was apparent low bidder at $2,500,600 for furnishing four turbines for the power plant at FORT RANDALL DAM, S. D. . . Invitations have been issued by Yellowstone district, Bureau of Reclamation, for bids on investigational work at the site of Yellowtail Dam on the Big Horn River, about 35 miles southwest of HARDIN, MONT.

Hospitals—Ground for a $7,000,000 children's medical center was recently broken in BOSTON, MASS., near the Children's Hospital. . . Construction may start this summer on the $1,250,000 Greenwood-LeFlore Hospital at JACKSON, MISS. . . Gov. W. Preston Lane of MARYLAND has proposed a complete reorganization and reconstruction of the state mental hospital system and has asked the General Assembly for $19,994,800 to begin the job. . . Two new hospitals are being built in TORONTO, ONT., at a total cost of $11,250,000. The Toronto Hospital for Sick Children has steel work complete, and stone work has started. This hospital will have 600 beds. It will cost $7,000,000. The second is the new 250-bed Mount Sinai Hospital, being built at cost of $4,250,000.

Housing—AS 10,000,000 apartment project is planned for COLLINGWOOD, N. J., a suburb of CAMDEN, N. J., and PHILADELPHIA, PA., by Sylvester A. Lowery, Philadelphia . . . An 18-story reinforced concrete apartment building of 370 units to cost more than $3,500,000 will be built in SEATTLE, WASH. The owner is the Keller-Block Corp. and contract has been awarded to Walter W. Harfst Co., Inc., and Wm. L. & Harry Henson . . . Martin Nadelman has launched a second housing development of $2,000,000 in HOUSTON, TEX. . . . In INDIANAPOLIS, IND., a $3,800,000 home building project developed by Schloss Bros. is expected to be completed next year, according to Lowell Frazer, construction manager . . . Construction has begun on the first 680 of 4,600 units in a $110 million community project in DALY CITY, CALIF., just south of SAN FRANCISCO . . . Groundbreaking has started for the $5,000,000 Monroe Park Homes on the Kennett Pike, WILMINGTON, DEL. . . . The trustees of DENVER, COLO., University have approved a $2,000,000 student housing project . . . BOSTON, MASS., Housing Authority will start two veterans' housing projects in the BRIGHTON section in June at a cost of $12,958,000, to provide for 906 families and will be financed under the state housing program . . . Work has been started on a community dwelling project in VILLE ST. LAURENT, near MONTREAL, QUE., to cost about $10,000,000 . . . Park Drive Manor is getting bids on a $5,000,000 apartment project at PHILADELPHIA, PA.

Airports—SAN FRANCISCO will vote next November on a $10,000,000 airport bond issue, needed to complete an improvement program already under way. . . Gov. Paul A. Dever recently asked the MASSACHUSETTS legislature for $3,000,000 to avert a delay in completing the apron building at Logan International Airport in EAST BOSTON. . . It is reported that a $70,000,000 reconstruction and improvement program during the next 15 years is planned for MACDILL FIELD, FLA.

Labor—Citing a decrease in the government cost of living index, the ELMIRA, N. Y., Area Builders Exchange has refused to offer union building trades craftsmen any wage increase over the 1948 rates. . . Construction trade truck drivers and plasterers' hodcarriers in AKRON, OHIO, got a 10-cent hourly boost on March 31. . . AFL union bricklayers in CANTON and STARK COUNTY, OHIO are now getting 12½ cents an hour more pay, increasing their hourly rate to $2.50.

Pollution prevention law is now pending in Ohio

A law prohibiting the discharge into public waters of untreated sewage or industrial wastes, which for the first time gives the Ohio state department of health the power to initiate preventive action before a gross nuisance is proved, was given unusual support at a legislative hearing last week. Spokesmen for the Ohio Association of Manufacturers and for municipalities —upon whom would fall the burden of building remedial works—expressed their satisfaction in favor of the bill along with conservation and medical group representatives.

The measure, known as S-60, will permit Ohio to take an aggressive stand on stream-pollution abatement. Under existing laws the health authorities can take action only after polluting material has "so corrupted a stream . . . as to give rise to foul and noxious odors or to conditions detrimental to health or comfort." This situation, states Fred Waring, state sanitary engineer, means that a stream must be practically ruined before a case can now be made against a polluter.

Testifying in support of the bill, Edward J. Cleary, formerly executive editor of ENGINEERING NEWS-RECORD and now chief engineer of the Ohio River Valley Water Sanitation Commission, pointed out that the passage of this bill would enable Ohio to satisfy its obligations under the terms of the compact through which eight states in the Ohio Valley are pledged to curb stream pollution.

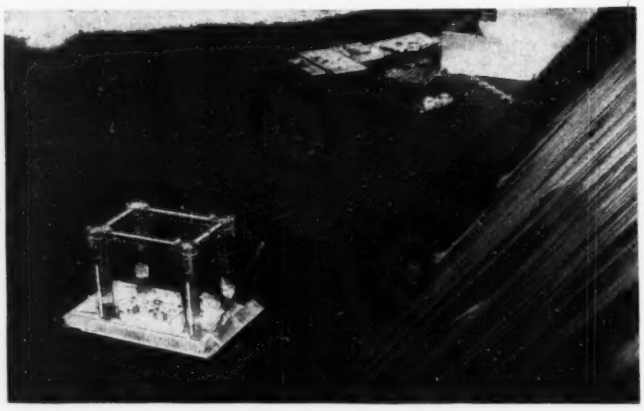

FLOATING CAISSON LAUNCHED--Repair of eroded spots on the spillway of Grand Coulee Dam will be accomplished by use of this floating caisson, shaped to fit contours of the spillway bucket. Access to the working chamber from the barge above will be through the four cylinders, which are 60 ft. long and will extend 22 ft. above the surface when the 1,500-ton caisson is lowered next fall.

Hospital not fireproof; flames kill 75

Officials of the Illinois State Fire Marshal's office and other state and private agencies were investigating last week into the causes of a fire at the St. Anthony Hospital, Effingham, that caused at least 75 deaths.

The 80-year-old building suddenly went up in flames near midnight, April 4, and burned so rapidly that firemen were unable to save much of the structure, and many patients and members of the hospital staff were trapped by flames and smoke.

According to data on file in the fire marshal's office at Springfield, the hospital was a two and one-half story structure, with brick exterior walls and wood joist and frame construction. The roof was sheathed in wood and covered with composition roofing.

The original building had been added to from time to time. Some extensions were non-combustible construction, but these communicated directly with older sections.

The hospital had no sprinkler system. There was only one system of standpipe and hose, with one riser. All elevator shafts, stairways and clothes chutes were open, and the building had only two slide-type fire escapes and one conventional fire escape. None of these were usable, however, since fire completely blocked the corridors leading to them.

Fire insurance rates were 62 cents per hundred dollars on the building—a rate which insurance men agreed would indicate little or no fire resistance value in the construction and equipment.

According to a preliminary report by James K. McElroy, assistant technical secretary of the National Fire Protection Association, rapid spread of the fire through the corridors of the upper floors was facilitated by a combustible acoustic tile on the ceiling and upper part of the walls. Similar materials have been shown by test to have a flame-spread classification of 225, compared with a classification of 100 for oak or fir, he said.

Mr. McElroy also attributed the quick spread of the fire to lack of an automatic fire-detection system.

No official report on causes of the blaze was available last week, pending completion of detailed investigations. However, newspaper and eye-witness reports indicated that the fire started in the basement—possibly among some cans of paint and varnish stored there—and spread rapidly through the wooden structure by way of the open clothes chutes and shafts and stair wells.

N. C. power company plans 4 hydroelectric projects

The Nantahala Power and Light Co., of Franklin, N. C., has filed with the Federal Power Commission declarations of intention to construct four hydroelectric projects—with a total capacity of 22,000 kva.—on the east fork of the Tuckasegee River, a tributary of the Little Tennessee River, in Jackson County, N. C.

The projects, designated Wolf Creek, Island Ford, Bear Creek and Cedar Cliff, would utilize the water runoff from the tributary drainage area.

Nantahala Power said that none of the four projects would have any probable effect on present or prospective navigation.

USBR considers building 30-mile tunnel in Idaho

The 100-year-old Department of the Interior may start off its next "Century of Conservation" with construction in southwestern Idaho of a 30-mile tunnel. R. J. Newell, regional director for the Bureau of Reclamation at Boise described the plan.

The tunnel, 19 ft. in diameter, is being considered as part of the 192,000-acre Payette unit of the Mountain Home irrigation project near Boise. Designed to carry surplus Payette River water into the Boise Valley to permit release of Boise River water into the Mountain Home area, the huge bore would pass through several mountain ridges. At one point it would be 2,400 ft. below the surface.

Chief engineer Leslie N. McClellan and staff of the bureau's Denver office have decided that the tunnel is feasible from an engineering standpoint. It would replace a 51-mile long aqueduct over another route, outlined in original plans. Mr. Newell pointed out that before construction can be initiated, the Mountain Home project must be found economically feasible. Congress must authorize the construction and provide appropriations.

If undertaken, the tunnel would be driven through a mountainous area between the upstream end of Garden Valley, near Banks, Idaho, to Moores Creek in the Boise River Basin, passing under the Placerville-Quartzburg area, a famous gold mining region. It would have a fall of 137 ft., or 4½ ft. to the mile, and a maximum capacity of 2,700 cfs. Horseshoe-shaped, it would be lined with concrete about 18 in. thick. The water would have a velocity of about 10 ft. per second—under free flow conditions—but the engineers are considering a plan for making it a pressure tunnel.

An estimated 6 to 8 years would be required to complete the structure, with 1,000 to 1,500 men employed.

The alternate aqueduct would consist of 26 miles of open canal and six tunnels, totaling 24 miles in length.

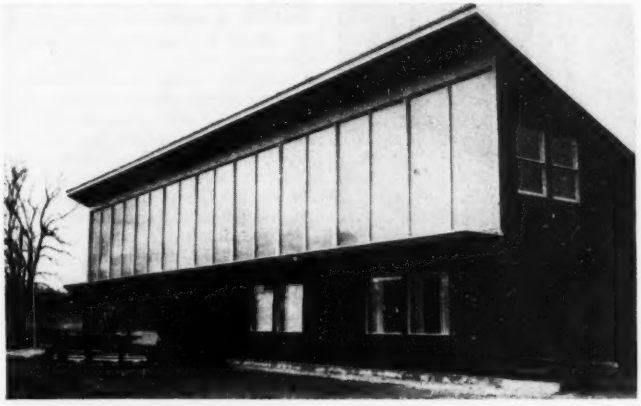

SOLAR HOUSE HAD EASY WINTER—Maria Telkes, associate researcher at Massachusetts Institute of Technology, admits that this open winter in Dover, Mass., was no test for her $20,000 solar heated house (ENR Sept. 23, p. 7). Still she claims the $3,000, salt-melting, warm-air-heating unit under her roof will warm the house through 10 sunless days. Warm air goes through ducts to "heat bins" in the five rooms. There is an 800-sq. ft. black metal sheet under the glass roof. Another solar house at MIT uses a hot-water system (ENR Mar. 10, p. 13). (Wide World Photo)

President signs Upper Colorado pact

President Truman last week signed the congressional act confirming the five-state Upper Colorado River basin compact. Approval of the law opens the way for the federal government to proceed with long-awaited overall development of the basin's resources.

Utah, Colorado, Wyoming, New Mexico, and Arizona already had signed and ratified the compact (ENR Aug. 5, 1948, p. 57). Now in full force and effect, it apportions the use of water by each of the upper basin states under the basic Colorado River Basin Compact of 1922.

"Projects in the upper basin can now be put forward for congressional authorization and construction," Interior Secretary Krug explained. "The Bureau of Reclamation has already been consulting the states on upper basin development. A plan—highly tentative to date—has been informally discussed with them as a step toward formal action. The tentative plan embraces construction of the primary upper basin storage reservoirs and a small initial group of irigation developments in Utah, Colorado, Wyoming, and New Mexico. In its final form, still more developments undoubtedly will be embraced in the upper basin program."

"The need for expediting further irigation, hydroelectric and other development in this five-state region is urgent and compelling. In no areas are the basic demands for water and power being satisfied."

Commissioner of Reclamation Michael W. Straus pointed out that the two compacts and the previous Interior Department report on Colorado Basin-wide development have laid a firm groundwork for effective action in getting the upper basin program underway.

"The initial group of irrigation projects would develop approximately 100,000 acres of new irrigated farm lands and provide supplemental water for more than 200,000 acres now inadequately supplied" Mr. Straus said. The main dams would furnish more than 1,780,000 kw. of installed hydroelectric capacity, with other benefits such as flood control, recreation, fish and wildlife, and municipal water."

Projects suggested in the initial plan discussed with the states are the central Utah and Gooseberry projects in Utah; the Collbran, Florida, and Paonia projects and Minnesota unit in Colorado; the Eden, Lyman, and Seedskadee projects in Wyoming; the Hammond project in New Mexico; the La Plata units and the Pine River project in Colorado and New Mexico. The Bureau of Reclamation is investigating other projects which could be brought under development as studies are completed.

Main storage reservoirs contemplated for river regulation call for such dams as the Red Canyon, Rattlesnake and Split Mountain dams in Utah; Echo Park, Cross Mountain and Cottonwood dams in Colorado, and Glen Canyon Dam in Arizona.

MANHATTAN HOUSE, a deluxe 19-story, reinforced concrete apartment building, will be constructed for New York Life Insurance Co. by Cauldwell-Wingate Co., New York, under a lump sum contract exceeding $10,000,000. Ground was broken last week, and completion of the 582-unit structure is expected by fall 1950. Glazed, self-washing brick and extensive use of glass should make the structure stand out in Manhattan's upper east side. Outdoor-indoor synthesis is sought throughout by the architects—Mayer and Whittlesey associated with Skidmore, Owings & Merrill—who have set the building back so that 65th and 66th streets can be widened from 60 to 100 ft. Charles Mayer of New York is the consultant engineer.

No cause for concern seen in reclamation fund cut

A break-down of the Interior Department's House-approved appropriation, reported last week (ENR, April 7, p. 11), shows all reclamation requests well satisfied. While cut $80,000,000 below budget estimates, the Interior fund still sets up $296 million for Bureau of Reclamation projects.

Construction money in the bill exceeds the fiscal 1949 funds by nearly $70,000,000. Bureau officials are not deeply concerned about the 15 percent cut in construction appropriations. They feel that some saving may be made in fiscal 1950 expenditures—as compared with estimates prepared last fall. If additional funds should prove necessary, they believe Congress will be receptive to supplemental requests that can be justified—as indicated by the House committee in its report on the measure.

The bill would revive the Southwestern Power Administration with funds for a three-year $31,000,000 program of transmission line construction. Funds actually allotted in the bill for this purpose comprise a $4,000,000 cash appropriation and $5,000,000 in contract authority. The House committee's report approved the entire SPA construction program for distributing power from Army Engineer dams in the Southwest.

Bonneville power received appropriations totaling $29,927,500 and contract authority for $15,725,000. The committee report approved all of Bonneville's proposed construction.

Other construction funds earmarked by the Interior bill as it passed the House include: Bureau of Indian Affairs, $7,800,000; National Park Service, $17,600,000; Government in the territories, $25,700,000 for Alaskan roads, plus $7,000,000 in contract authority.

Wyoming reclamation plan dropped as uneconomic

Construction of the proposed Lyman reclamation project—to furnish supplemental water for 40,600 acres in Uinta County, Wyo.—was recommended for deferment recently by Secretary of the Interior J. A. Krug. Lack of ability to repay the entire construction cost in the time required by law was the reason for disapproval of the project.

The secretary held the door open for later authorization and construction—possibly when the power revenue from large storage reservoirs in the upper basin may be available to help share the cost burden. Another possibility would be through modification of existing repayment law.

Commissioner of Reclamation Michael W. Straus pointed out that the whole cost of the project is properly allocable exclusively to irrigation. He estimated that the project would take more than 150 years to pay out.

Project plans call for construction of an earth-fill dam 185 ft. high to impound 43,000 acre-feet of water at the bridge site on Willow Creek, together with a distribution system. Estimated cost is $9,235,000.

Oregon Legislature OK's Rogue River reservoirs

Green light to the Bureau of Reclamation's plans for a $90,000,000 irrigation, flood control and power project in the Rogue River basin in southwestern Oregon was given by the Oregon Legislature when it passed a bill which would permit construction of a dam on the Rogue at Lewis Creek.

Specifically, the measure changes the line below which no dams may be constructed on the Rogue. It moves the line downstream 8 miles. Sports groups opposed the proposal, but proponents of the measure insisted it would not harm fish life.

Plans for the completed project involve nine storage reservoirs with an aggregate capacity of 517,900 acre-ft. Seven of the dams would be on tributaries of the Rogue and two on the Rouge itself.

The lower of the two reservoirs on the Rogue would serve irrigation, power and flood control purposes. The lower reservoir on the Rogue, created by the Lewis Creek dam, would have a storage capacity of 350,000 acre-ft. A mile below the Lewis Creek site, a 40-ft. dam would divert water into canals leading downstream on both sides of the river.

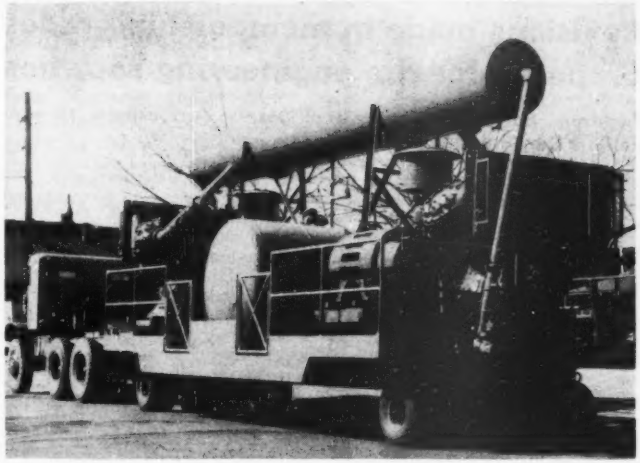

MASSIVE MOBILE COMPRESSOR can follow the jumbo right down to the tunnel face and supply 110 psi. air pressure to its drills. Mounted on a 30 ft. long, 16-tire trailer, the unit consists of two electrically driven compressors that total 1,500 cfm. Winter-Weiss Co., Denver, designed and built this plant, collaborating with the U. S. Bureau of Mines.

Imperial irrigation group to vote on power project

Voters of the Imperial Irrigation District will decide on a $12,500,000 issue of power revenue bonds at an election to be held in a few weeks, it has been announced by Evan T. Hughes, district president, El Centro, Calif.

Providing clearance is obtained from the federal government, the principal project will be a 33,000-kw. hydroelectric plant at the Pilot Knob site on the All-American Canal. Otherwise, the plan is to add a 30,000-kw. steam station to the present one nearing completion at El Centro, and to build a 9,600-kw. hydroelectric plant at the Drop 2 site on the All-American Canal. Other additions and improvements to the system also would be financed by the proposed bond issue.

Preliminary plans for the proposed hydroelectric plant at Pilot Knob were prepared in 1945 by district engineers and the Bureau of Reclamation. Plans for the other work have not been prepared, and an engineering firm will not be retained until the bond issue is finally approved. Then plans and specifications will be submitted in its entirety. Feasibility of the project has been approved by California District Securities Commission. Gibbs and Hill, consulting engineers, of New York City, prepared the plans on the El Centro steam plant now being completed.

FPC OK's $100 million lines to bring Texas gas to Pa.

The Federal Power Commission has authorized the Texas Gas Transmission Corp. and the Texas Eastern Transmission Corp. to build 1,175 miles of pipeline facilities costing nearly $100 million. The new lines will carry natural gas from the east Texas, Texas Gulf coast, and north Louisiana areas to Kentucky, Tennessee, Indiana, Ohio and Pennsylvania.

Facilities authorized for construction by Texas Gas include 723 miles of 26-in. line from the Lisbon gas field in Louisiana to a point near Middletown, Ohio; 110 miles of 20-in. line from the Carthage field in east Texas to the Lisbon field; a 32-mile lateral in Indiana from Madisonville to Evansville; and 10 compressor stations with an initial installed capacity of 68,000 hp. Total estimated cost is $73,500,000.

Construction proposed by Texas Eastern and authorized by the commission includes 177 miles of 26-in. line extending eastward from a point of connection with the Texas gas facilities near Middletown, Ohio; a 100-mile extension of the Little Big Inch Line in Texas; 33 miles of loop line near Beaumont, Tex.; 36 miles of loop line between Castor and Lisbon; and additional compressor facilities. Total cost of these facilities has been estimated at $24,052,000.

Revisions made in membership grades proposed for the engineering societies

Engineers' Council for Professional Development expects to have uniform standards ready for action this year

The study of uniform grades for membership in the principal engineering societies begun last year by the Engineers' Council for Professional Development has reached a point where it is now expected that minimum qualifications for the proposed grade will be ready for approval of the council at its annual meeting in October.

Tentative specifications for three "essential grades" of Member, Associate Member (formerly Junior Member), and Student Member were submitted to the council last October (ENR Nov. 11, p. 73), also specifications for optional grades of Fellow and Affiliate. These had been drafted by the ECPD Committee on Professional Recognition, of which Ole Singstad is chairman. Following a discussion by the council, it was decided to call a conference of official representatives of the principal engineering societies to determine whether these specifications could be put in a form that would have a good chance of acceptance by most or all of the societies.

That conference was held in New York on Feb. 25 under the chairmanship of James W. Parker, chairman of ECPD. Representatives from eight societies participated. The American Society of Civil Engineers was represented by William N. Carey, executive secretary, Dean G. Edwards, chairman of the ASCE Committee on Membership Grades, and V. T. Boughton, vice-chairman of the committee and ASCE representative on the ECPD executive committee. The National Society of Professional Engineers was represented by D. B. Steinman and Russell G. Warner; Harry S. Rogers and D. B. Prentice represented the American Society for Engineering Education.

Minimum requirements proposed

Discussion indicated that if the specifications set up by the Singstad committee could be considered as minimum requirements, the probability of their acceptance by the five principal engineering societies that have more than one grade of membership is good. Also, it was stated that requirements for the member grade would have to be broad enough to admit men without engineering training but who have equivalent training in related fields because the American Institute of Mining Engineers admits geologists to full member grade, and the ASCE admits both geologists and architects.

Numerous changes in the qualifications for the several grades of membership were approved by the conference and referred to Mr. Singstad's committee, which on March 22 submitted a revised set of requirements to the ECPD executive committee. They are as follows:

A Member, at the time of his admission or advancement to that grade, shall be a graduate of an engineering curriculum approved by the governing board of the society concerned and shall in addition have had not less than four years of increasingly important engineering experience indicative of growth in engineering competency and achievement and of a character satisfactory to that board at least two years of which shall have been in responsible charge of engineering work. If not such a graduate, he shall have had not less than ten years of engineering experience satisfactory to the governing board of the society concerned.

An **Associate Member** shall, at the time of his admission or advancement to that grade, be a graduate from an engineering curriculum approved by the governing board of the society concerned. If not such a graduate, he shall have equivalent attainments, including at least six years of engineering experience of a character satisfactory to the governing board.

A **Student Member** shall be registered in an undergraduate or a graduate engineering curriculum approved by the governing board of the engineering society concerned and shall be pursuing a course of study in preparation for the engineering profession.

Interpretation of qualifications

In considering the qualifications for the grades of Member and Associate Member, the following additional interpretations apply:

(a) A license to practice professional engineering issued by a legally authorized body, or the passing of an examination prescribed by the governing board of the engineering society concerned, may be accepted as qualifying experience for the grade of Member.

(b) Engineering teaching of a character approved by the governing board in a curriculum approved by that board, shall be considered to be qualifying experience.

(c) If not a graduate of an engineering curriculum, approved by the governing board of the society concerned, a graduate of a natural or physical science curriculum related to engineering and of equivalent standing, generally qualifies for the grade of **Affiliate**. The governing board of a society, however, may at its discretion, give such graduates in natural or physical sciences consideration as Member or Associate Member.

The grade of **Fellow** shall have an

John L. Savage wins the Washington Award

John Lucian Savage, internationally known civil engineer, has been designated 1949 winner of the Washington Award, made annually by a joint committee of the American Society of Civil Engineers, American Society of Mechanical Engineers, American Institute of Electrical Engineers, American Society of Mining and Metallurgical Engineers, and the Western Society of Engineers.

Savage will receive the award "for his unselfish public service devoted to the creation of monumental hydraulic structures utilizing natural resources." The award will be made at a dinner in Chicago on April 20, at which time he will discuss the Yangtze River Dam project underway in China.

Mr. Savage has been with the Bureau of Reclamation since 1903 (except for an eight-year leave) in various engineering capacities. No longer chief designing engineer, he is still a USBR consultant.

honorary status to which an engineer of distinction is called, but for which he cannot apply.

The grade of **Affiliate** shall apply to those who are not professional engineers but whose pursuits, scientific attainments, or practical experience qualify them to cooperate with engineers in the advancement of engineering knowledge and practice.

Second conference called

The executive committee of ECPD, after reviewing the revised qualifications, voted to call a second conference late in May, at which time it is expected that the revised recommendations of the Singstad committee can be put in final form for approval by ECPD. If approved, they will then be recommended to the several societies for adoption.

Serious need of sewerage seen for Los Angeles

The 245-mgd. high-rate activated sludge sewage treatment plant now under construction by Los Angeles at Hyperion will be inadequate by 1953—soon after initial operation—according to Merrill Butler, deputy city engineer (ENR May 29, 1947, vol. p. 874). By that time the design population of 3,000,000 will be passed, Mr. Butler told a meeting of the California sections of the American Society of Civil Engineers held in San Diego recently.

Discussions by C. C. Kennedy, San Francisco consulting engineer, and A. L. Genter, Baltimore consulting engineer, centered on the fertilizer production of the plant. The Hyperion plant will, it was claimed, have the biggest digestion system in the world with a production of 200 tons of digested solids per day. Using a conservative estimate of $10 a ton, it is expected that revenue from the sale of fertilizer will reach three-quarters of a million dollars annually.

Some 400 attended the San Diego sessions. Success of this second California convention will help set a pattern for future regional ASCE meetings. The society is considering reduction of the number of national meetings held each year from the present four to only one or two.

A convention highlight was the student paper contest with representatives of nine colleges and universities participating. First prize was won by John Heaht, California Institute of Technology, with a paper on "Water Supply in the Santa Barbara Area." John D. Marchand, Stanford University, was runner-up.

Three meetings planned "south of the border"

Summer engineer meetings include ASCE, another in Mexico, and one in Rio

By coincidence three special conventions are scheduled this summer in which engineers from both North and South America can participate. Two will be held in Mexico City and one in Rio de Janeiro, Brazil.

The first meeting, April 30 to May 7, in Mexico City is to be known as the First International Civil Engineering Congress. It has been organized by the Society of Professional Civil Engineers of Mexico under sponsorship of the Mexican government, the National University of Mexico, the National Polytechnic Institute and the Association of Engineers and Architects of Mexico. These groups have had such a meeting under study since just after the war with the object of exchanging information with delegates from other countries. The agenda will cover all phases of civil engineering interest. Francisco Gomez-Perez, consulting engineer of Mexico City has attended numerous engineering conventions in the United States during the past two months and publicly extended invitations to all members to attend the International Congress. Further information can be obtained from him at his address, Alpes 350, Lomas, Mexico, D. F., Mexico.

The other two meetings will occur simultaneously—the First Pan American Engineering Congress in Rio de Janeiro, July 15-24, and the summer meeting of the American Society of Civil Engineers in Mexico City, July 13-16. The ASCE meeting, although held in a foreign locale, will be the normal summer convention that otherwise would have taken place in some U. S. city in the Southwest or West. In this connection, it has been pointed out that Chicago is closer to Mexico City than it is to our own West Coast.

ASCE members in Mexico City will handle the local arrangements just as the members in any U. S. city would. The program will cover both U. S. and Mexican projects and developments, and is looked upon as providing a rare opportunity for closer cooperation between U. S. and Mexican engineers.

The First Pan American Engineering Congress in Rio is being promoted by the South American Union of Engineering Associations. Organized according to the extensive pattern set by other international conferences, particularly in Europe, it will have nine main committees each devoted to a branch of engineering such as transport, construction, electric power, sanitation, etc., with each committee charged with developing a program. Papers have been invited from U. S. engineers, and the closing date for receiving them is April 30. The Engineers' Joint Council has set up a "committee on U. S. participation" under the chairmanship of S. S. Steinberg, dean of engineering, University of Maryland, College Park, Md., and further details are available from him.

HIGH FLYING HIGHWAY ENGINEERS—This recently purchased four-seater plane of the New Mexico State Highway Dept. has already proved its worth for fast travel, route reconnaissance and emergency work. Used extensively by the department, the plane cuts down the great travel distances throughout the state. Shown here are H. R. Payne, acting chief clerk; B. G. Dwyre, department engineer; and J. R. Mitchell, pilot.

State Department sends USBR engineer to Cairo

T. W. Mermel, engineering assistant to the commissioner of reclamation, flew to Egypt recently to participate as an unofficial U. S. observer at the second International Technical Congress of the World Engineering Conference. The congress met in Cairo (ENR March 24, p. 21).

His trip resulted from a last-minute decision by the State Department to use this means of opening up another avenue for exporting U. S. technical know-how to parts of the world that can utilize it to develop their resources. President Truman proposed that course in famous Point 4 of his inaugural address.

Previously the state department had chosen four attaches—agricultural and military—from embassies and legations abroad to attend the conference. To make a real U. S. contribution to the meeting, a reclamation engineer was needed.

An important part of the Congress program centers in water problems in the Middle East. The U. S. engineering representative will give to the sessions on that subject the benefit of reclamation experience in this country, including information on multipurpose projects. He will also talk to representatives of other governments in that area about the possibility of using U. S. technical help on irrigation, power and basin development in working out reclamation problems.

Lending an engineer to the State Department is not a new experience for the Bureau of Reclamation. On many occasions, the bureau has supplied engineers upon request to serve as advisers to foreign governments.

ECA sets up technical information division

The Economic Cooperation Administration last week announced that a technical assistant division to help Marshall Plan countries get Information on American production methods. Albert M. Pitcher, former vice-president of the Westvaco Chemical Corp., New York, heads the new unit.

Until now, the technical assistance program has been directly under the ECA director of operations. The new technical assistance division includes two branches—a program branch, headed by Jack E. Fobes, and an arrangements branch, headed by Elliott S. Hanson. A field office at 2 Park Avenue, New York, helps the latter branch take care of technical delegations from participating countries.

N. J. plan offers incentive to low-cost home builders

A plan to entice builders into the low-rent housing construction field—by offering them 2-percent loans and a 6-percent profit—has been presented to the New Jersey legislature by Gov. Alfred E. Driscoll. He has asked passage of the measure, even if a special session must be called for the purpose.

Governor Driscoll's program calls for low-cost housing financed through self liquidating loans to builders. Some 45,000 rental units available at $50 per month to persons with incomes under $3,000 are wanted.

A $100 million bond issue to be voted on next November would back the sale of State Housing Authority bonds to banking agencies at a low enough rate, so that they, in turn, could lend to the builders at two percent. Construction would be limited to slum clearance, and tax abatements for periods as long as 50 years would be granted to builders and development corporations. Profits on investments would be held to six percent and the tax abatement would not apply on developments of other than "blighted areas."

The Governor wants construction started by summer.

PERSPECTIVE • • •

A beginning for Point 4

Washington is now looking upon a report recently submitted by the Joint Brazil-U. S. Technical Commission as a probable beginning point for President Truman's proposal to help under-developed areas.

The commission was under the joint chairmanship of Dr. Octavio Gouvea de Bulhoes, of the Brazilian Ministry of Finance, and John Abbink, former chairman of the McGraw-Hill International Corp.

With the report out, the next move will be to make some decisions. As a first step, the State Department will see that interested agencies study the report and make time Brazil may be expected to take recommendations. At the same similar action, particularly because the report makes it clear that the Brazilians themselves must do most of the work of raising their country to a higher economic plane.

Discussing Brazil's economy from an overall point of view, the report warns that further development of industry and agriculture is pendable sources of fuel and power not enough. Larger and more de- must be found; more efficient transportation provided; a larger supply of skilled labor must be trained; and more technical and managerial talent is needed.

Since there is practically no unemployment in Brazil and little supply of labor and materials will surplus manufacturing capacity, the limit the country's ability to carry out development projects.

The lesson to be learned here, the commission suggests, is that a development program "will probably require modest beginnings," and that it should be in balance at the start, with most urgent needs being dealt with first.

That won't be easy because some of the most pressing requirements —such as improved transportation— call for large investments of capital in industries which don't look like good risks.

Another point made by the commission is that wood accounts for more than four-fifths of Brazil's energy production, the remainder coming from hydro-electric power, imported petroleum and domestic and imported coal. Though the quality of the country's coal is poor, it could be improved by the use of suitable cleaning equipment.

More hydro-electric capacity is obviously needed, as recognized in the government's own long-range, $950 million Salte development plan. This would alone increase installed capacity over a six year period from 1.5 million to 2.8 million kilowatts.

To finance the development, the commission recommends increased tax revenues; use of domestic borrowing to finance education and health programs, re-direction of private savings by modifying laws and regulations setting lower limits on the percentage of bank and institutional reserves; strengthening of foreign credit standings; granting special inducements to favored investments, and a cooperative arrangement whereby both the U. S. and Brazil would offer guarantees to private U. S. investors.

ENR INDEX NUMBERS

Index Base = 100		1913	1926
Construction Cost	Apl.'49	473.54	227.63
Building Cost	Apl.'49	351.35	189.93
Volume	Mar.'49	271	119

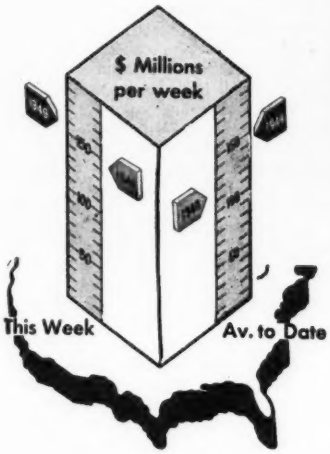

Activity This Week

As reported to ENR

(in millions of dollars)

Amount of Contracts let

	Week of Apl. 14 1949	Cumulative 1949 (15 wks.)	Cumulative 1948 (16 wks.)	% chge av.wk.
Federal	$11.9	$341.5	$347.2	+5
State & Mun.	71.4	755.1	628.6	+28
Total Public	$83.3	$1,096.6	$975.8	+20
Total Private	74.9	1,112.3	906.0	+31
U. S. Total	$158.2	$2,208.9	$1,881.8	+25

Contracts by type of work

	This Week	Cumulative 1949 (15 wks.)	Cumulative 1948 (16 wks.)	% chge av.wk.
Waterworks	$3.8	$40.8	$49.8	−13
Sewerage	7.7	62.2	56.9	+17
Bridges	11.4	102.7	84.2	+30
Highways	12.5	153.7	237.7	−31
Earthwork, Waterways	2.4	175.8	156.9	+20
Buildings, Public	36.8	486.8	324.3	+60
Industrial	7.8	315.3	301.8	+11
Commercial	64.0	705.9	526.8	+43
Unclassified	11.8	165.5	143.5	+23

NOTE: Minimum size projects included are: Waterworks and waterway projects, $28,000; other public works, $50,000; industrial buildings, $68,000; other buildings, $250,000.

New capital for construction

	Cumulative 1949 (15 wks.)	Cumulative 1948 (16 wks.)	% chge av.wk.
NON-FEDERAL	$1,439.9	$1,011.5	+52
Corporate Securities	679.7	586.6	+24
State and Municipal	760.2	429.9	+91
Total Capital	$1,439.9	$1,011.5	+52

FACTORY ON PRECAST FOUNDATIONS—Precasting all footings, grade beams and walls, the Wigton-Abbott Corp. of Plainfield, N. J., has begun construction of this 700,000-sq. ft. plant near Pittsburgh. A Continental Can Co. factory, it will have a structural steel frame, concrete floors and steel roofing. To speed construction, precast grade beams will be used, spanning between precast piers on 20-ft. centers. After floor has been poured, precast spandrel wall sections 20 ft. by 3 ft. 11 in. will be erected.

State building code asked to aid Wisconsin housing

A major step toward speeding private construction of housing was offered in the Wisconsin Senate recently in a bill proposed by the veterans' affairs committee.

This bill would provide state regulation of dwelling standards, and would oppose "restrictive trade and labor practices" by use of the state anti-trust law.

The measure denounced "monopolistic practices" in the building materials business. It charged that bans on labor saving machinery and prefabricated units unnecessarily increase the costs of homes.

Canadian building code discussed at conference

The National Building Code of Canada was the subject of a recent two-day conference in Ottawa under the auspices of the National Research Council. The conference was attended by representatives of over 40 leading Canadian municipalities, most of the provincial governments, and interested departments of the federal government.

The code was issued in 1941. It is in use, to some degree, in more than 30 municipalities. With the start of the new Division of Building Research of the council, steps have been taken to bring the code up to date.

For this purpose a new associate committee of the N.R.C. has been formed and the meeting was its initial activity. The urgent need was expressed for a pocket-sized edition of the building code for use on residential construction.

Utah's governor cuts construction funds

Utah's Gov. J. Bracken Lee has vetoed appropriation items that provided funds for some $9,000,000 worth of building projects, virtually eliminating all funds for state construction other than that already under way.

He vetoed in entirety a $5,170,000 building program passed by the recently adjourned state legislature.

FACED WITH ALUMINUM, the spandrel walls of this apartment building are three courses of cinder block; all else is reinforced concrete. David Rose is builder of the 850-unit development still under way in Forest Hills, N. Y. Leo Stillman is the architect, Victor Mayper, the engineer. A .22 caliber gun "shoots" studs into concrete for fastening the metal facing. Formwork is handled by 100-ft. cranes.

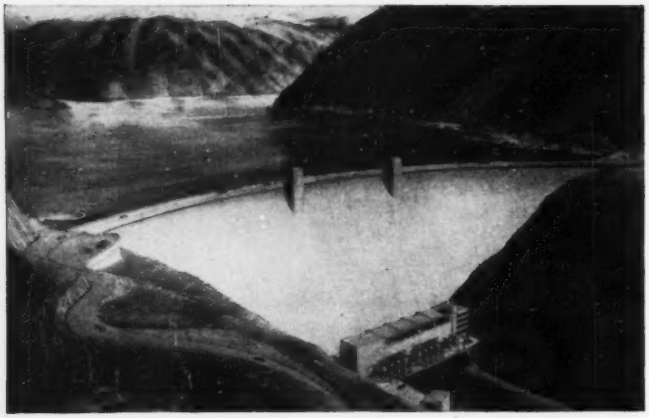

Hungry Horse Dam . . .

. . . Will Plug Flathead River Gorge

Max Ford
Engineer, U. S. Bureau of Reclamation
Denver, Colorado

WITH the arrival of spring, work on Hungry Horse dam will go on a full-speed basis for the first time. Representing the largest single U. S. Bureau of Reclamation contract now underway, and the fourth largest concrete dam in the world, work on Hungry Horse has been of a preparatory nature — building roads and housing, driving a diversion tunnel and stripping abutments. Now that the stage has been set, the contractor plans on diverting the river after the spring floods and to start concrete operations late this summer. Total contract time is more than 5½ years.

The $43,431,000 contract for construction of the dam and power plant was awarded April 21, 1948, to a group of 12 contracting firms incorporated under the title of General-Shea-Morrison Co. Construction started June 7, 1948.

A part of the Columbia River system development, the dam is to be located in northwestern Montana on the south fork of the Flathead River. The dam will be the world's largest with a glory-hole spillway. A flyash pozzolan will be added to the concrete.

The physical dimensions of the dam are exceeded only by those of Grand Coulee, Hoover and Shasta Dams. Rising 520 ft. from the lowest point in the foundation, the dam will contain 2,900,000 cu.yd. of mass concrete, exclusive of concrete in power plant, spillway and other structures. The dam is to be a variable-thickness, arch-type structure, having a constant upstream radius of 1,200 ft. Due to the comparatively flat arch, the minimum downstream slope at the line of centers will be 0.6 to 1.

The total length at the top of the dam is about 2,100 ft. and the width is 39 ft., accommodating a 30-ft. roadway and two sidewalks. A gross storage capacity of 3,500,000 acre-ft. will be provided, and 2,980,000 acre-ft. of this will be active storage to be used for power generation, flood control and future irrigation needs.

The power plant will be a reinforced concrete structure located at the toe of the dam in the original river channel. The power installation will consist of four vertical-shaft 75,000-kva. generators, each connected to a 105,000-hp. turbine operated under heads from 260 to 479 ft. The turbines are to be served by 13-ft. 6-in. dia. penstocks that will have emergency controls consisting of fixed wheel gates operated by manually-controlled hydraulic cylinders installed at the upstream face of the dam. In addition to a power plant service road, access to the plant will be possible from the top of the dam by elevators.

Construction schedule

Maximum river flow usually occurs during late May and June. Climatic conditions are such that work must be held to a reduced rate between about November 1 and March 15 because of cold; concrete placing will be stopped during winter months.

This winter, however, it has been necessary to carry on drilling operations and other incidental work to meet the schedule. The contractor has established a rule of no work when the temperature at 8 a.m. is below 0 deg. F. During January the job was shut down about half the time.

The construction schedule must also be keyed to meet the specification requirement of storing a usable supply of 1,000,000 acre-ft. of water from the 1952 seasonal runoff.

To date no concrete has been placed for the dam and power plant, but about 400,000 cu. yd. of rock have been excavated for the foundations of the dam and the excavation for the

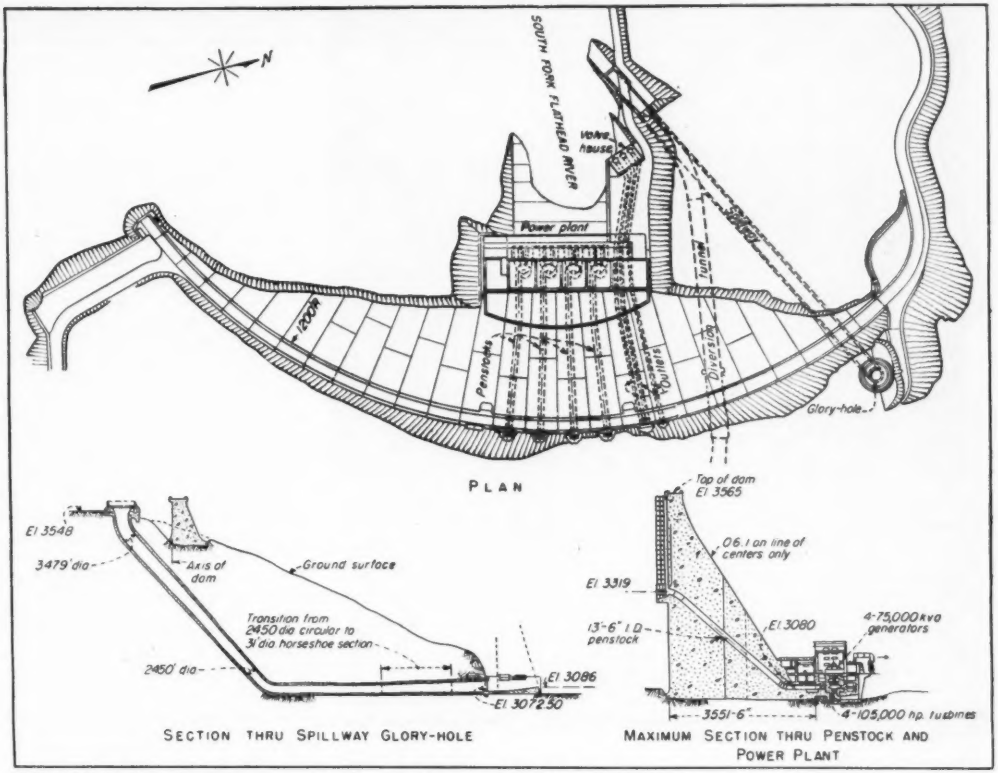

HUNGRY HORSE, fourth largest concrete dam in existence and largest to be served by a glory-hole spillway, will require 2,900,000 cu. yd. of concrete and is scheduled for completion by the end of 1952.

spillway tunnel is about 40 percent completed. The contractor's tentative mass concrete placement program for the dam is: 1949—250,000 cu.yd., 1950—1,000,000 cu.yd., 1951—1,000,000 cu.yd. and 1952—650,000 cu.yd.

Concrete will be placed from a half-mile-long cableway similar to that used at Shasta Dam. In fact the main cables from Shasta are being used at Hungry Horse to brace the main tower.

A new mixing plant will have four 4-cu.yd. mixers; buckets of 8 cu.yd. capacity. Aggregate will be carried by a fleet of specially designed trucks from a deposit 5½ mi. from the dam. All other materials will be shipped to the job by rail and truck.

To reduce the large cement requirements, specifications require that the contractor use flyash (or a pozzolanic material that will produce equivalent results) in the concrete. The flyash is a finely divided dust precipitated from the stacks of certain steam power plants burning pulverized coal, and is well known as an active pozzolan. Laboratory tests indicate that satisfactory concrete mixes can be obtained with as little as 2½ to 3 sacks of cement per cubic yard of concrete if additions of flyash are made in the mix. It is contemplated that 30 percent of flyash by weight of portland cement will be used. This compares with 20 percent used at Davis Dam (ENR Feb. 3, 1949, p. 62).

Glory-hole spillway

The principal hydraulic features in the construction of the Hungry Horse are the spillway and spillway tunnel. The spillway is to be near the right end of the dam and will be of the glory-hole type, topped by a 64-ft. dia. by 12-ft. high ring gate. Choice of the spillway type was dictated by conditions such as the narrow canyon width available for the power-house. Desire to restrict the energy involved in the drop and the relative soundness of the natural rock formations were also taken into account.

The river will be diverted through a 36-ft. unlined horseshoe tunnel driven through the rock of the right abutment a distance of about 1,150 ft. This tunnel was completed in June, 1948, under a separate contract by the Guy F. Atkinson Co. (except for the concrete intake structure which has since been constructed by General-Shea-Morrison.)

The spillway tunnel, also at the right abutment, will be lined and will have a circular section varying from 34.79 to 24.50 ft. in diameter. Since spillway and diversion tunnels join near the outlet, the diversion tunnel will be lined from this junction to serve as part of the spillway, after the diversion tunnel is plugged.

Although the maximum computed design flood inflow was 80,000 sec. ft., the spillway capacity was reduced to 53,000 sec. ft. by providing reservoir outlets and by planning operations to permit the reservoir to rise a maximum of 5 ft. above normal high water surface during maximum flood.

The recent floods on the Columbia River and its tributaries emphasize the importance of flood control in the

DRILLING CREWS have dominated construction work thus far. Almost a million cubic yards of excavation is involved in the stripping and tunnel work.

Columbia Basin. The 1948 Spring flood on the south fork of the Flathead River approached a near-record of some 40,000 sec. ft., with great damage resulted in the Kalispell, Mont., area, a few miles downstream.

The contemplated plan of operation (summer storage and winter generation) for maximum development of firm power lends itself ideally to flood control contributing to the control of the Columbia River. The reservoir will normally be somewhat drawn down when the spring runoff occurs; and, if snow surveys and winter climatic data indicate an abnormal runoff is in prospect, the lake could be emptied to a level below the normal power drawdown.

Flood changes design

The original specifications called for two 96-in. dia. outlet conduits for regulation of outflow during normal operation. However, after the flood disaster in the lower Columbia River region last spring, the Corps of Engineers added a third 96-in. dia. outlet conduit. Greater discharge capacity will thus make possible quick evacuation of the reservoir in the face of an impending flood.

The three outlet pipes will extend through the dam and the substructure of the power plant to a valve house located on the right bank of the river channel, about 200 ft. downstream from the power plant. Discharge will be controlled by hollow-jet valves in the valve house, and ring-follower gates located in the mass-concrete foundation of the power plant. A bulkhead gate is provided for emergency or maintenance work and will be lowered from the top of the dam by a 150-ton gantry crane. The gantry crane will also be used to install the penstock fixed wheel gates and their hydraulic hoists, and for maintenance.

The rock foundation of the dam is an impure dolomitic limestone—dense, tough and moderately hard. Some bedding planes and joints are present that will in part control the character of the foundation excavation. Nevertheless the 36-ft. horseshoe diversion tunnel was excavated without the use of supports and with little overbreak.

The general plan for grouting the foundation under the dam provides for preliminary low-pressure shallow grouting, to be followed by intermediate and final high-pressure deep grouting. The preliminary low-pressure grouting will be completed prior to the placing of any concrete in the dam, through holes 20 to 40 ft. in depth and spaced at about 20-ft. centers each way in the area under the upstream one-third of the dam. Additional low-pressure holes in the area covered by the downstream portion of the dam and power plant are to be drilled and grouted where necessary.

The intermediate pressure grout holes are to be drilled through 2½-in. pipes, placed in the concrete fillet at the upstream heel of the dam to depths of 50 to 75 ft. The holes will be spaced on approximately 10-ft. centers, and no grouting will be done until the dam concrete has been placed to a minimum height of 25 ft.

The high-pressure grout holes are to be drilled to depths of 75 to 200 ft. on 5 ft. centers from the foundation gallery in the dam through 2½-in. pipes placed in the concrete. High-pressure grouting will not be started until the dam concrete has been placed to a minimum height of 200 ft. The minimum diameter of all grout holes will be 1⅞ in. Depending upon the character of the rock, packers will be used at various depths wherever it is necessary to vary the grouting pressure.

Foundation drainage is to be obtained by drilling 3-in. holes through 4-in. pipes placed in the concrete of the foundation gallery. The drainage holes, 50 to 75 ft. deep, will be on approximately 10-ft. centers, and no holes will be drilled until the foundation grouting is completed.

To keep tensile stresses to a minimum in the arch elements, it is planned to cool the mass concrete of the dam to 38 deg. F. before grouting the joints. This temperature is 5 deg. F. below the final average temperature of the dam. Stresses in the dam induced by the design loadings were determined by the trial load method of analysis. The analysis also included the effects of stresses due to construction and to contraction joint grouting.

The dam will have continuous transverse contraction joints from upstream to downstream face, spaced at 80 ft. intervals at the upstream face of the dam. Only one longitudinal joint in each row of blocks will be constructed in the central portion of the dam between transverse joints. However, this longitudinal joint will be staggered in adjacent rows. As on all recent USBR concrete dams, the concrete will be placed in 5-ft. lifts with shear keys on all of the contraction joints.

Systems of grout pipes will be installed in the mass concrete with outlets on the contraction joints for pres-

TABLE I—WORLD'S LARGEST CONCRETE DAMS

Name	Volume (cu. yd.)	Height (ft.)
1. Grand Coulee	10,493,000	550
2. Shasta	6,413,000	602
3. Hoover	4,400,000	726
4. HUNGRY HORSE	3,037,800	520
5. Fontana	2,812,000	480
6. Bull Shoals	2,100,000	278
7. Friant	2,045,900	320
8. Mettur (India)	2,000,000	230
9. Mansfield (Marshall Ford)	1,865,000	270
10. *Aswan (Egypt)	1,732,000	142

*Masonry

sure grouting after the mass concrete is cooled. As an added safeguard against leakage through the transverse contraction joints, formed drains will be constructed on the joints 10½ ft. from the upstream face. These open drains will be protected from intrusion of grout by asphalt seals while the grouting of the transverse joints is in progress. Since each grouting lift will have a maximum height of 50 ft., excessive grout pressures in the joints will be avoided.

Design loadings of the dam include a water load up to normal high water surface and an ice pressure of 5 tons per linear ft. of dam. These are combined with a horizontal force produced by an assumed earthquake shock. The acceleration of the foundation caused by the design earthquake loading was considered to act along the line of centers in an upstream direction. The effective shock was assumed to have an acceleration of 0.1 g and to have a period of vibration of one second.

Cooling by river water in winter

Artificial cooling with river water will be employed in two stages to lower the temperatures of the concrete so that shrinkage will be completed in time to permit grouting the joints as construction proceeds. The initial stage will begin immediately with the placement of concrete about the pipes and proceed for a minimum of 16 days. The second stage will lower the temperature of the concrete to the required 38 deg. F., and will take place during the winter when the temperature of the river water is low. It is estimated that the second stage cooling will require about 40 days.

The cooling system will consist of 1-in. pipes spaced 3 to 5½ ft., depending upon the size of the blocks. These cooling pipes will be placed on the foundation rock and on top of each successive 5-ft. lift. All of the concrete cooling operations and all of the contraction joint grouting operations, with the exception of some contraction joint lifts near the foundation, will be carried out from the downstream face of the dam.

Hungry Horse Dam and its power plant will constitute a key unit in a comprehensive, long-range program to insure full control and utilization of the Columbia River and its tributaries for agricultural and industrial development of the Pacific Northwest. Extensive studies were made by the Bureau of Reclamation and the Bonneville Power Administration to determine the economic height of the dam, and the cost of the project were balanced with the benefits expected from the firm power that is to be generated at the dam and at existing and contemplated downstream power plants.

THE DIVERSION TUNNEL OUTLET is located just below the right (north) abutment shown here in the early stages of excavation to bed rock.

THE CONSTRUCTION TOWN will ultimately house families of 1,000 workers. Bureau of Reclamation quarters are in the foreground and the contractor's camp beyond.

It is estimated that in addition to 208,000 kw. of prime power made available at Hungry Horse Dam, the prime power capacities of existing downstream power plants at Kerr Dam and Thompson Falls, Mont., and at Grand Coulee, Rock Island and Bonneville dams on the Columbia River, will be increased by 334,000 kw. In addition, 490,000 kw. of prime power will be added to capacities of power plants either authorized or contemplated for construction as part of the ultimate development of the Basin.

To obtain the maximum of prime power, the plan of operation contemplates that the project will be integrated into a single system with Grand Coulee, Bonneville and other federal projects for which the Bonneville Power Administration is the marketing agency. Operation will involve high-capacity generation during the winter months when the power is needed most and the water releases can be used to the best advantage at the downstream plants. In spring and summer months, when ample power is available from the downstream plants the project will store water and generate a minimum amount of power.

Hungry Horse Dam is being built by the Bureau of Reclamation, of which Michael W. Straus is commissioner. The engineering design and construction are under the direction of Leslie N. McClellan, chief engineer and Clyde H. Spencer is construction engineer for the project.

Contractor under the $43,431,000 contract is a combination sponsored by General Construction Co., Seattle, Wash., working under the name General-Shea-Morrison (same name used on Seattle City Light's Ross Dam on the Skagit River). C. W. Woods is project manager. Other participating contractors are The Shea Co.; Morrison-Knudsen Co., Inc.; F & S Contracting Co.; J. L. McLaughlin; Pacific Bridge Co.; Walsh Construction Co.; S. Birch & Sons Construction Co.; Peter Kiewit Sons' Co.; The Kaiser Co.; I. C. Boespflug Construction Co.; and Gilpin Construction Co.

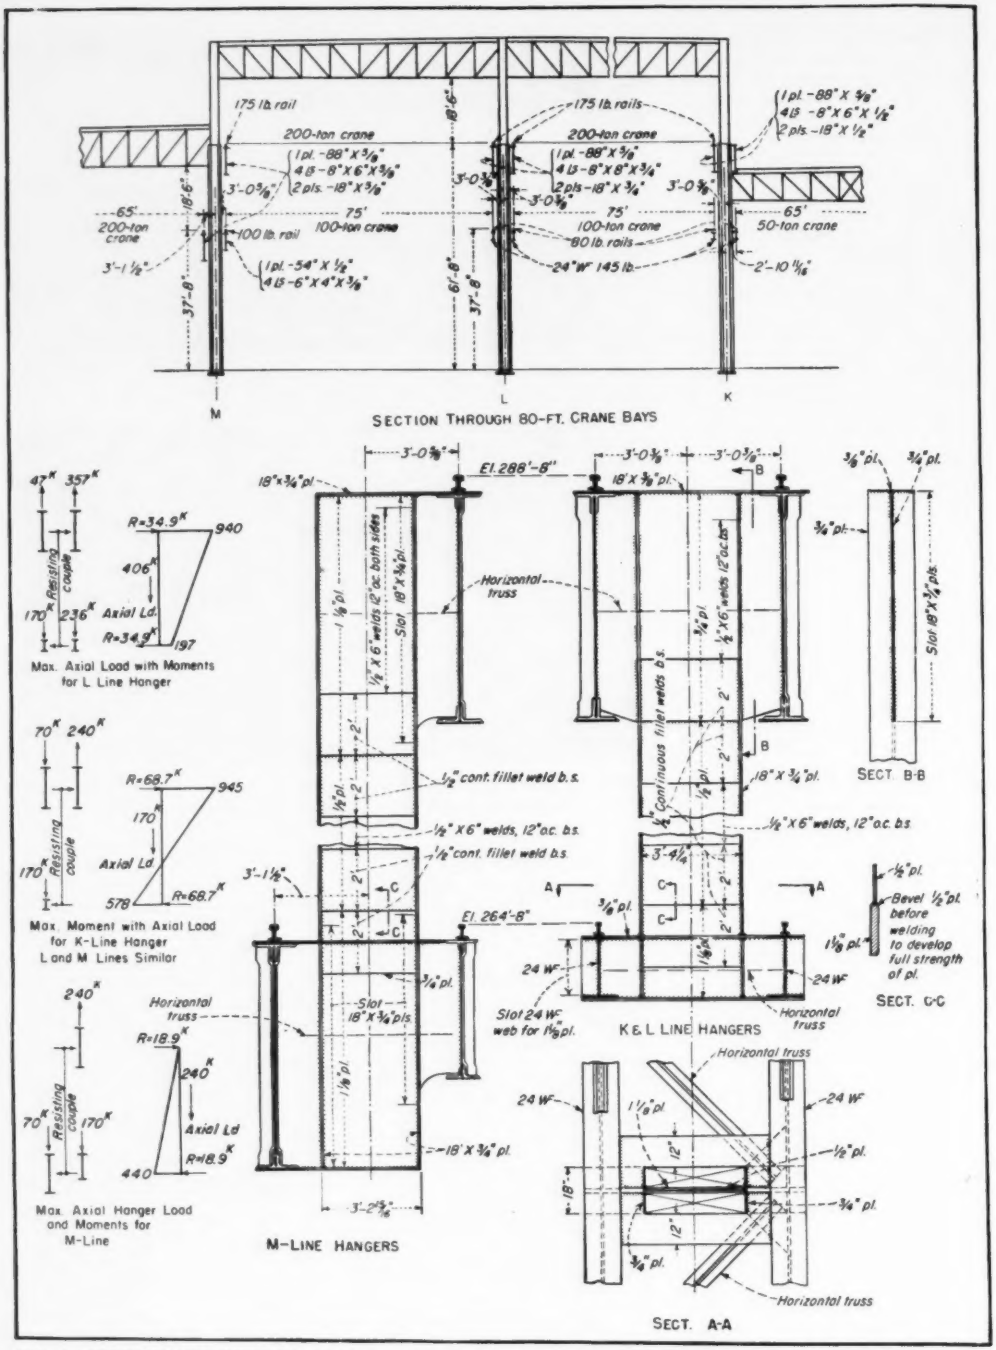
SECTION THROUGH 80-FT. CRANE BAYS
Max. Axial Load with Moments for L Line Hanger
Max. Moment with Axial Load for K-Line Hanger L and M Lines Similar
Max. Axial Hanger Load and Moments for M-Line
M-LINE HANGERS
K & L LINE HANGERS
SECT. A-A
SECT. B-B
SECT. C-C

FIG. 1. SECTION AND DETAILS of 80-ft. crane-bays in the General Electric Co. turbine manufacturing plant at Schenectady, N. Y. Two levels of crane girders were installed, the lower suspended from the upper by hangers at the third points.

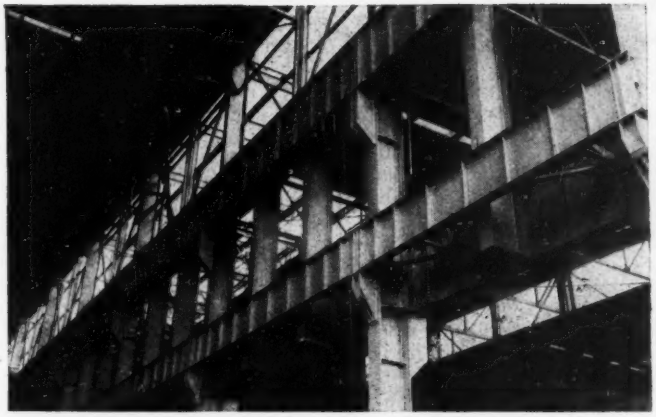

FIG. 2. AT THE M COLUMN LINE in the turbine plant, a plate girder proved economical at the lower level in the 80-ft. bay. Conditions differed from K and L lines where hangers permitted use of rolled sections.

Girders Act in Unison To Support Cranes at Two Levels

To SOLVE a headroom problem in the world's largest turbine manufacturing plant, designers called for third-point suspension of the obstructing crane girders, from crane girders at a higher level. This framing scheme made it possible to reduce the size of the lower-level members so that rolled sections could be used instead of plate girders.

The limited headroom in two bays of the plant presented this dilemma: Two crane runway levels had to be provided in each bay, while maintaining specified clearances and heights of rail from the floor. Design calculations indicated that insufficient depth was available at the lower level for a simple girder capable of carrying the crane load.

The two bays are 80 ft. wide and extend the full length of a 650x1,290-ft. field-welded, steel-frame factory recently built for the General Electric Co. in Schenectady, N. Y. In the longitudinal direction, columns are 40 ft. apart.

There are 51 traveling cranes in the building, varying from ½ to 200 tons in capacity. No problem was presented in bays where there was only one level of cranes. In the two 80-ft. bays, however, two runway levels were required—the upper one for 200-ton cranes and the lower for 100-ton cranes. Clearances in the K and L column lines (Fig. 1) were too high for a simple girder to carry the 100-ton crane on the 40-ft. span while maintaining the height of rail originally established.

The problem was solved by suspending the lower-level girders from the upper. Hangers placed at the third points of the span permit the use of 24-in. rolled sections, which are sufficiently shallow to satisfy the headroom requirements.

Horizontal trusses, placed at each runway level to resist the horizontal crane thrust, also resist rotation of the hangers and were designed for this additional force. With the hanger mantained in a vertical position, all loading is divided equally between the upper girders. This results in an appreciable economy in steel.

At the M column line, where a third 200-ton crane runway is located on the opposite side of the column line from the double runways, but at the level of the lower runway in the 80-ft. bay, the two main supporting girders are of necessity at different levels. It is desirable, however, to locate the horizontal trusses at the neutral axis of the girders to which they frame. If a 24-in. rolled section had been used in this instance for the lower girder in the 80-ft. bay, the truss located at the midpoint of the 88-in. girder would have required a separate member for its chord in this bay. Substitution of a 54-in. deep plate girder for the rolled section and truss chord resulted in a slight reduction in weight over the two separate members, clearance conditions at this column line permitting this depth of member. This plate girder was designed to act in bending only between hangers in the same manner as the rolled sections on the other lines.

On the K line where there is no 200-ton crane runway on the opposite side of the column, it was found economical to use a dummy girder at the high level.

In the design of the crane girders, higher stresses than normal were permitted under loads imposed by fully loaded cranes in the same bay on both runways at the same column line. It was considered that the occurrence of this condition is improbable.

Headroom problem

After the preliminary design had been completed, it was found desirable to increase the height to which the hook on the lower crane could be raised, and the headroom problem was no longer serious. Nevertheless, because of its economy, the original design was retained.

Details of the hanger connections are shown in Fig. 1. Particularly noteworthy are the use of welding and of diaphragms for the full depth of the girders.

(Other details of the design and construction of this plant were given in "Concrete Jacketing H-Piles in Soft Mud," ENR Feb. 5, 1948, vol. p. 179; "Vibration Testing of Friction Piles," ENR May 13, 1948, vol. p. 715; and "Insulated Stainless Steel Panels Inclose 4-story Office Building," ENR, 1949, p.)

Design and construction of the turbine plant were carried out for the General Electric Co. under the supervision of the General Electric Realty Corp. by Stone and Webster Engineering Corp.

LARGEST WELDED FACTORY

The new General Electric Co. turbine manufacturing plant at Schenectady, N. Y., is believed to be the largest field-welded industrial building in the world. Having over-all dimensions of 650 x 1,290 ft. and a total floor area of 1,027,986 sq. ft., the superstructure contains 14,800 tons of structural steel. Below ground, there are 13,300 tons of steel in 4,700 H-piles, 80 to 140 ft. deep. Roof trusses and some of the smaller columns were shop welded.

How to Dispose of Fluorescent Tubes Safely

To MINIMIZE health-hazardous inhalation of beryllium dusts—contained in fluorescent-lamp tubes, various methods for safe disposal of such tubes have been developed by beryllium-compound suppliers, insurance companies and a number of state boards of health.

Recent medical literature has been studded with reports of serious changes in the lungs of workers exposed to dust containing various beryllium compounds.

Recommended methods for disposal of fluorescent tubes as well as the possible hazards of exposure to beryllium dusts are outlined by Louis W. Spolyar, M.D., in a recent issue of the Monthly Bulletin published by the Indiana State Board of Health. Dr. Spolyar is director of the division of industrial hygiene for that Board.

Acceptable disposal methods, which may be selected on the basis of number of tubes to be destroyed, are:

(1) Burned-out fluorescent tubes are dropped through a slot in the floor above into an inclosed, ventilated crusher. Broken glass is removed wet. Exhaust passes through a collector; captured dust is wet down and removed. Used by tube manufacturers themselves, this is the best method of disposal where hundreds of tubes are replaced each day.

(2) Tubes may be broken in a ventilated hood by a crowbar or piece of pipe. The ventilated hood should be inclosed on all sides except the working front and designed so that the operator cannot enter. Face velocity of intake air should be maintained at 150-200 fpm. Exhaust air should pass through a collector in which dust can be wet down. Wet dust should be removed with minimum handling. A grated floor in the hood will allow broken glass to drop into a hopper where it can be wet down and removed.

(3) Where a small number of lamps are consumed, fluorescent tubes may be placed in a burlap bag, immersed in a trough or shallow tank of water and broken with a crowbar or pipe. The buoyant tubes must be weighted down. The wet bag plus the crushed contents is removed and dumped.

(4) Another method for disposal of fluorescent lamps in small quantities is recommended by the New York State Department of Labor's Industrial Hygiene Division. Two parallel bars are placed in an open-end oil drum about one-third height above the bottom as part of a removable frame. With the drum about two-thirds full of water, individual tubes are inserted between the bars and snapped off below water level. A removable wire-mesh basket, just small enough to fit inside the drum, is utilized to catch broken glass. Water with beryllium particles is poured to waste with care.

(5) In the open, where released phosphor dust and mercury vapor will be quickly dispersed by air currents, fluorescent tubes may be broken individually in cardboard jackets with a pipe or crowbar. The operator should stand to windward and wear goggles as well as heavy canvas or leather gauntlets.

(6) Disposal of fluorescent tubes by incineration should not be practiced.

(7) Fluorescent tubes used in the home should not be broken but should be placed in a tall trash container intact. The short-length tubes lend themselves to "disposal intact." The trash container should be high enough to prevent small children from removing tubes.

Dr. Spolyar calls attention to the fact that the tubes are under vacuum and will **implode** when broken, but occasionally will **explode.** Thus, in any disposal method—wet or dry—he warns that operators must wear goggles and heavy gauntlets.

Health hazards

Dr. Spolyar says most of reported cases of lung damage occurred in plants manufacturing fluorescent-lamp tubes. Controlled manufacturing conditions, he commends, now limit exposure.

The disposal of fluorescent-lamp tubes containing beryllium and phosphor dusts offers three health hazards: (1) Inhalation of the beryllium-containing dust may cause changes in the lungs. The changes include pain in the chest, shortness of breath, cyanosis (formation of a bluish substance) and fluid in the lungs. This condition may last three weeks or more. (2) The phosphor dust containing beryllium might gain entrance into a wound sustained by breaking a tube. If all the beryllium compound is not removed, healing will be delayed and the wound may not close for several months. It appears that the beryllium contaminant in the wound produces a granuloma (a morbid growth resembling granulated tissue) with irregular areas of necrosis (gangrenous tissue). (3) It has been demonstrated that fluorescent tubes contain some free mercury. Thus a potential hazard of mercury poisoning exists.

Lamp manufacturers originally included about 12 percent beryllium as a component of the phosphor powders. This percentage was reduced to about 2 percent in 1943, he reports.

The beryllium compound used in the manufacture of fluorescent tubes is reported to be manganese beryllium silicate (Skin Lesions in Persons Exposed to Beryllium Compounds, R. S. Grier, Peter Nash, and D. G. Ferimen, Indus. Hyg. and Tox. #30: 228-237, July 1948).

Shortcut publication Of building ordinances

In order to bypass the excessive cost of publishing building code ordinances before they can be adopted as law, 15 states have now passed enabling acts to authorize municipalities to adopt codes by reference.

According to the American Society of Planning Officials, the states that have enacted this legislation include: Alabama, California, Idaho, Illinois, Minnesota, Nebraska, New Hampshire, New Jersey, New Mexico, North Dakota, Oregon, Pennsylvania, South Dakota, Utah and Washington.

Many cities have deferred adoption of model standards and codes because of their prohibitive publication costs. For example, in Colorado, where cities are required to publish codes in full twice in a newspaper, it costs a city about $2,200 to adopt the uniform Pacific Coast building code.

Under the recently passed state legislation, cities may merely adopt a brief law referring to the technical code by title and date. Then the ordinance is published in the newspapers in the regular manner as required by law.

In its recent publication, "Suggested State Legislation," the drafting committee of the Council of State Governments recommended that all state legislatures consider the adoption of a statute allowing building codes to be adopted by reference. The Housing and Home Finance Agency, in cooperation with other interested groups, has recently developed a model bill that is believed to be more advantageous in several respects that some of the existing statutes.

The full text of the statute is available in Technical Bulletin No. 7, published by HHFA.

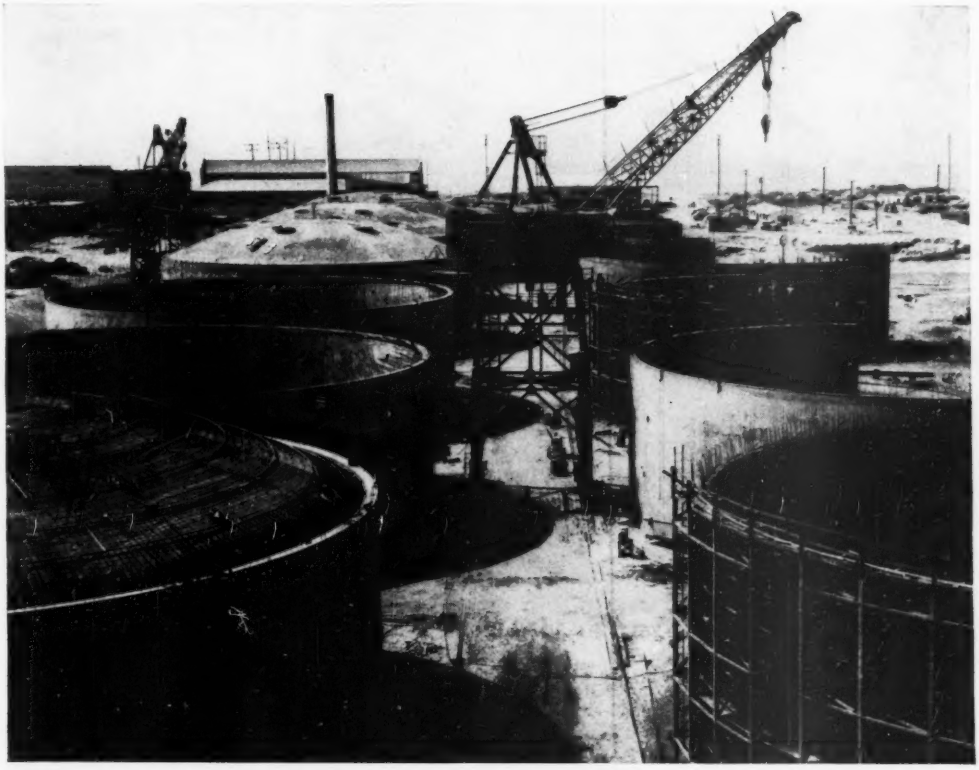

ASSEMBLY-LINE ERECTION of eighteen large sludge digestion tanks speeds construction at the Los Angeles sewage plant.

Hyperion Digesters Are Mass-Produced

"MASS PRODUCTION" of the 18 sludge digestion tanks for the Los Angeles sewage treatment plant has been made possible by use of steel forms permitting efficient concrete placing and because the design included a wire-wrapped prestressing system. This prestressing permits the 33-ft. side walls of the 111-ft. dia. digesters to be cast in quarter-sections with vertical joints. The tanks will have conical bottoms and domed roofs.

The $3,991,000 contract—held by the Pacific Bridge Co.—for construction of the digester system at Hyperion is only one of several contracts now under way on the new 245-mgd. activated-sludge plant (ENR May 29, 1947, vol. p. 874). Other work in progress on the plant—intended to remedy the pollution of 10 miles of beaches—includes a mile-long, 12-ft. dia. outfall (ENR Aug. 5, 1948, p. 64), a headworks building, a filter and dryer building, primary settling tanks, a power and blower building, and the moving of 14,000,000 cu.yd. of sand from the plant site.

Two alternates were allowed for the tank walls when bids were called: tanks of conventional reinforced concrete design, or tanks built by the wire-wrapped prestressing system. For each alternate, three different roof systems were permitted: fixed steel covers, flat slab and girder roof and the accepted reinforced concrete domes.

Stressing procedure

Relatively thin shells (6- or 8-in.) are permissible in wire-wrapped tanks, because of prestressing, but at Hyperion engineers specified a thickness of 20½ in. inside of the wire wrapping, for easier construction and more effective heat insulation.

Wrapping wire used is initially 0.162 in. dia. During the wrapping the wire is drawn down to a diameter of about 0.142 in. The stressing increases the length of a 350-lb., 3,700-ft. wire bundle to 6,000 ft.

In this manner a stress of 130,000 to 150,000 psi. is initially put into the wire. This is well within the elastic limit of the wire, the yield point being at 165,000 psi. and the ultimate strength 200,000 psi. Some 20,000 to 30,000 psi. of the stress is lost after the wire is placed due to normal concrete shrinkage and plastic flow, but stress in the wire will be above the 100,000 psi. required by specifications.

Because pressure of sludge is greater toward the bottom of the tanks, wires are spaced closer together near the

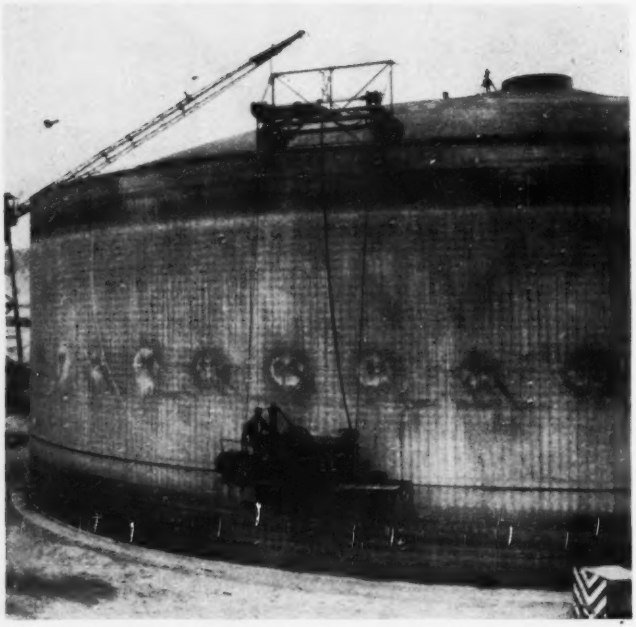

THE WIRE-WRAPPING MACHINE travels up to 7 mph. Form bolts penetrate the concrete only at the bottom and mid-height as indicated by the patches.

base than at the top. This spacing varies from 74 wires per foot at the bottom to a minimum of twelve wires per foot in the top 7 ft. Three layers of wire are required where more than 60 wires are placed per foot of wall height, and two layers where more than 30 are placed per foot.

Dome wire-wrapped first

With a heavy concentration of wires around the top of the wall at the tank dome, a domed roof with a circular section and a thickness of only 5 in. can be placed. This requires a band of 200 wires within a 2-ft. height to effectively restrain the dome.

The dome rises 13.86 ft. in the 110.92 ft. diameter. It is a true circular section with a radius of 117.85 ft. (A similar dome was installed in the repair of a 164-ft. dia. water tank at Halifax, Nova Scotia, ENR Aug. 7, 1947, vol. p. 187).

The success of wire-wrapping depends upon the machine used to place the wire. This machine is suspended from a two-wheeled, rubber-tire guide that rides the top of the tank wall, the guide being attached by wire cables to a tripod bolted to the center of the dome. Four rubber tired wheels bear against the side of the tank. Cables from the guide lower and raise the machine. Motive power is a four-cylinder gas engine that pulls against a chain circling the tank, making it possible to attain speeds up to a top of 7 mph.

The wire is mounted on a reel and fed through a carboloy-inset die. Insets vary in size (0.140, 0.141 and 0.142 in.) depending on stress desired.

DIGESTER WALLS are cast in a groove that is 5 in. wider than the unstressed wall.

A clamp attaches the ends of two reels of the wire together and the effect is one continuous strand for the full height of the tank. To insure continuity in case of a break, two adjacent strands are clamped together, each twelve strands or so. Besides this, occasional strands are bolted into the side of the tank.

Sets of forms that permitted construction of a quarter section of the tank at a time were used during construction. By using four sets of inside and three sets of outside forms, the work proceeded so that about one-quarter section was poured per day.

Each set of forms broke down into three separate sections that could easily be moved by 50-ton capacity revolving gantry cranes. Outside and inside forms were bolted together at the top, the middle, and the bottom. Thus, only two rows of bolts—the middle and the bottom—go through the concrete. One and three-eighths-in. dia. bolts in pairs were used for this purpose. After forms were removed, these bolt holes were plugged with mortar.

Construction sequence

Briefly, construction sequence was this:

The site was graded and the sandy subgrade compacted. Then circular wall footings for the digesters were poured. Next an automatic excavating machine formed the subgrade for the conical bottom of the tank. The sand was firm enough so the concrete could be poured directly on the excavation.

The conical bottom was then poured in several pie-shaped sections, alternate sections being poured a day or so apart, with copper waterstop and expansion material between pours.

With the footing and conical bottom completed, the wall could be started. Inside forms were erected, then reinforcing steel was placed. Reinforcing steel was prefabricated in sections to minimize time required to set it in the forms—nine panels of reinforcing were welded up in advance for each quarter section of the tank. Final step in preparing the forms was the setting of the outside panels.

Concrete was placed by 2-yd. buckets handled by the gantry cranes. Buckets were hauled two at a time on flat-bed trucks from the 2-cu.yd. capacity mixing plant at one edge of the working area.

Eight hoppers, leading into 10-in. dia. flexible chutes extending to the bottom of the form, were used for the concrete work. Each 2-yd. bucket of concrete was placed in a separate funnel, consecutive buckets progress-

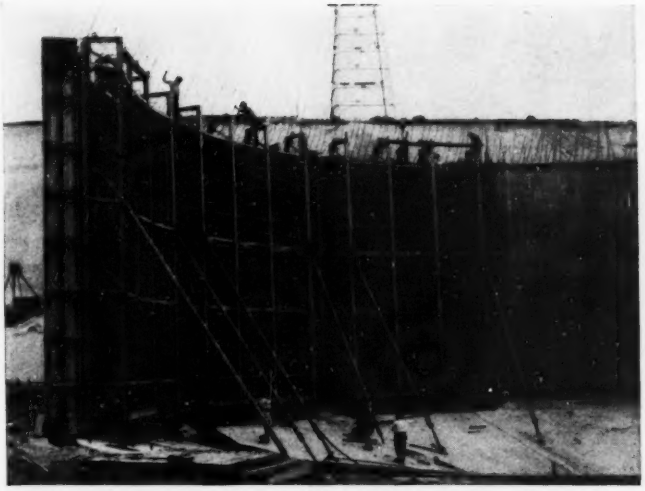

THREE-SECTIONS of steel forms are used for one-quarter of the inside of a digester wall. Casting tanks in four parts is permissible because of wire wrapping.

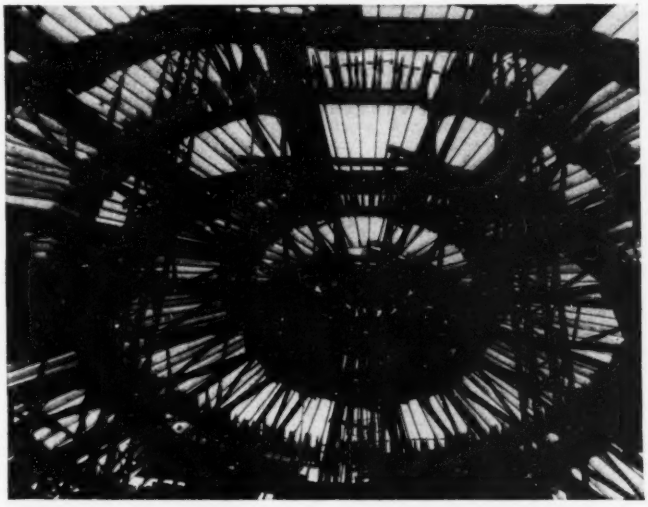

SPIDER-LIKE TIMBER JOISTS for dome forms are supported by a steel truss and column system.

ing from one end of the quarter-section to the other.

Vibrator operators working in cramped quarters inside of the forms removed sections of pipe as the pour progressed and also vibrated the concrete. One man serviced two chutes.

Forms were left in place for a period of 24 hours or more, then moved to the next section. Each quarter-section was cured for seven days before the next section of the same tank was poured. A ¾-in. pipe with a $\frac{7}{16}$-in. nozzles sprayed water continuously around the top of each tank for curing.

After a complete tank wall was poured, work started on forming the concrete dome. A steel-truss system on fabricated steel columns supported wooden forms.

Next step was wrapping the tank proper. After this was done, a coating of gunite was placed over the entire outside of the tank so that a minimum of $\frac{3}{8}$ in. of gunite covered each strand.

Placing of the wire decreased tank diameter by about ¾ of an inch. To allow further shortening as plastic flow in the concrete takes place, the walls were cast in a trough in the footing some 5 in. wider than the poured wall. The portion of this groove outside the wall was filled with gunite. A rubberized asphaltic compound, covered with gunite was placed in the groove between the trough and the footing around the inside of the wall to permit further creep and make a watertight seal.

General contractor for the construction of the tanks is Pacific Bridge Co., San Francisco, Charles Bisordi, general superintendent. Subcontractors are Ofcco Construction Co. for mechanical and piping, Newbery Electric Co. for electrical work, and Rutherford and Scoubye for reinforcing steel fabrication. Including the subcontractors, an average of 175 men was employed on the job.

This work is part of the construction of the 245-mgd. treatment plant for the city of Los Angeles and is under the direction of Lloyd Aldrich, city engineer. Detailed direction for the city is by Merrill Butler, deputy city engineer for design.

Groundwater Study Methods Outlined in Report

A report describing methods for the solution of problems relating to groundwater flow in buried channels or other water-bearing formations of limited areal extent has been released by the United States Geological Survey.

The report is one of a series prepared by the Survey in cooperation with the Geological Survey Division, Michigan Department of Conservation. Methods employed in a statewide investigation of groundwater resources are demonstrated for the use of engineers, geologists, and hydrologists who apply results of field surveys and research to practical problems in design and development of groundwater supplies.

The report, entitled "Ground-water Hydraulics as a Geophysical Aid," by J. G. Ferris, issued as Technical Report No. 1 of the Geological Survey Division, is on file at the Federal Survey, 2209 Federal Works Building, Washington 25, D. C. Copies are available for distribution from the Geological Survey Division, Michigan Department of Conservation, 205 Capitol Savings and Loan Bldg., Lansing 68, Michigan.

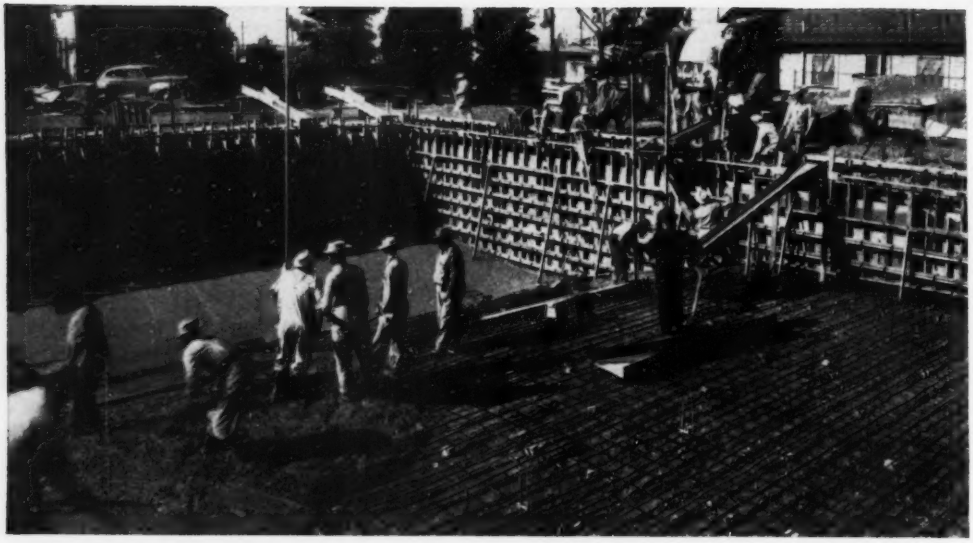

A PANEL-HEATING SYSTEM was imbedded in the swimming pool for the Technical High School, Oakland, California.

Panel Heating for Swimming Pools

AN INVISIBLE radiant panel-warming system has been installed in the base slab of the Technical High School swimming pool, Oakland, Calif.

This system was adopted on the basis of eight-year operating experience that demonstrated these advantages over the conventional mixing of heated water directly with pool water:

(1) A reduction in heating costs of at least 40 percent;

(2) Elimination of upkeep costs for piping; and

(3) Maintenance of uniform temperatures from the bottom to surface of pool.

The radiant panel water-warming system consists of: A hot water boiler; a recirculation pump; a distribution header; 21 copper-tube coils and 21 returns in the pool floor and a collection header leading back to the boiler (Fig. 2).

The gas-fired boiler—rated at 1,920,000 Btu. per hr. and not less than 10,240 A.G.A. rating—is designed to put out water constantly at about 180 deg. F. maximum. The boiler is equipped with automatic gas valve, thermostatic safety pilot, automatic thermostatic boiler-temperature controller, a manually adjustable water-temperature regulator with a 120/240 deg. F. range, a gas-pressure regulator, and a combined pressure, altitude and temperature gage.

Hot water is drawn from the boiler and circulated through the panel-heating system by a 50-gpm., 20-ft. head centrifugal pump powered with a 220-v., 3-phase, 60-cycle induction motor. A magnetic, inclosed, across-the-line starter with no voltage and overload protection is equipped with a disconnect switch. The 120-v. circuit for the starter is carried to the pool thermostat—set to start and stop the recirculating pump at selected temperatures.

Exposed distribution header

The recirculating pump discharges into a distribution header located along one side of the pool. The exposed header, which decreases in diameter from 2.5 to 0.75 in. as the number of coil takeoffs diminish, is hard-temper, type L, copper water tube. A concrete block at the mid-point serves to anchor the exposed header and permit expansion in opposite directions from the center. The heavily insulated header is located in a trench under the pool deck.

Copper-tubing takeoffs, 0.75 in. in diameter, are located along the header to connect with the 21 irregularly spaced panel-heating coils. Fittings are wrought copper; all joints are made with solder containing 44-46 percent silver.

Tubing in base slab

Three coil systems and 21 returns, all of 0.75-in. soft-temper, type L, copper water tubing, are imbedded about 1.25-inch below the surface of the pool floor. Coils occupy about two-thirds of the pool floor while returns, which lead from the coils to the collection header, serve the remaining area (Fig. 2. The total length of imbedded copper tubing is about 9,000 lin. ft.

Coil systems—distinguished by the number of loops as well as loop spacing—are laid transversely in the concrete floor. In the diving area—the deepest and farthest section from the source of heat—the ten coils contain three loops spaced 7-in. apart. The portion of the diving area adjacent to the center of the pool has six coils, each with five loops spaced 7 in. on centers. The central section with an average depth of about five ft. is served with five coils, each with five loops on 12-in. centers.

Imbedded returns from all loops extend back parallel to the distribution header but on the opposite side of the pool and then transversely across

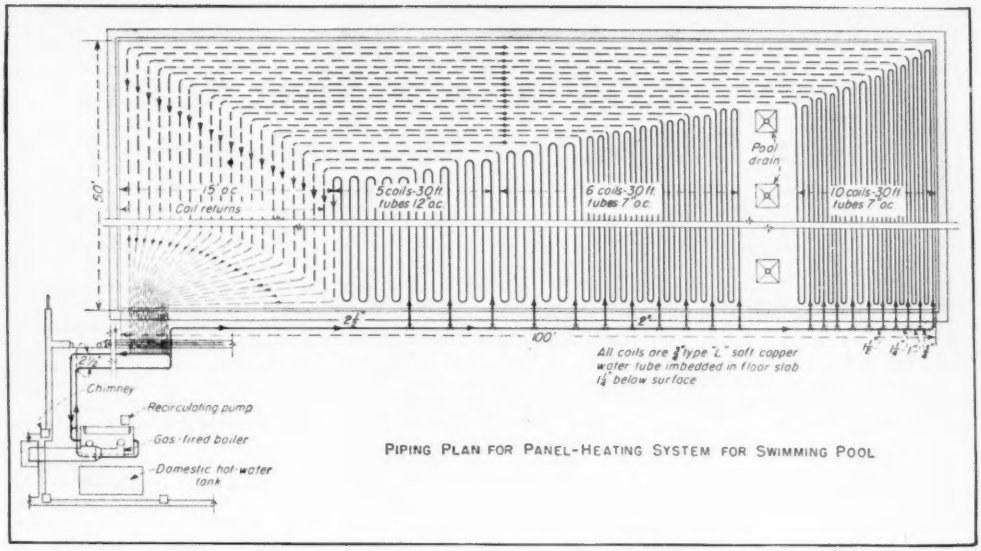
15 p.c. Coil returns
5 coils-30 ft tubes 12" oc.
6 coils-30 ft tubes 7" oc.
Pool drain
10 coils-30 ft tubes 7" oc.
50'
100'
All coils are ¾" type "L" soft copper water tube imbedded in floor slab 1¼" below surface
Chimney
Recirculating pump
Gas-fired boiler
Domestic hot-water tank
PIPING PLAN FOR PANEL-HEATING SYSTEM FOR SWIMMING POOL

Fig. 2. PIPING, BOILER AND PUMP LAYOUT for the panel-heating system. Closest spaced coils are in deepest portions of pool. Return tubes heat shallow-water areas.

the pool at 15-in. spacing to furnish heat for the shallowest section. As the returns approach the edge of the pool, they are placed on a diagonal towards the corner, and concentrated in a bank for passage underground from the pool to the boiler room.

To insure uniform 1.25-in. depth below the pool-floor surface, coils and returns are laid directly on reinforcing bars (Fig. 1). Reinforcing was depth-positioned on small precast concrete blocks.

In the boiler room, the returns connect to a 2.5-in. collection header leading to the boiler. Each return is equipped with a gate as well as a balancing fitting with solder ground-joint union connections.

Exposed return piping is hard-temper, type L copper water tubing. All joints are formed with 44-46-percent silver solder.

Air-relief valves and drain valves are included at the highest and lowest points, respectively, in the piping system.

No leakage permitted

Before concrete was poured, the entire panel-heating system, including boiler, pump, mains and imbedded coils, was tested for leakage. (Fig. 3). This was done by closing the drain valves, filling the system with water and pumping up to a hydrostatic pressure of 50 psi. The piping work was accepted when the pressure did not fall below 40 psi. Correction was made for temperature changes.

Following the pressure test, the boiler was put into operation and water temperature was increased under manual control to about 140 deg. F. With the recirculating pump running and some valve throttling, the entire system was balanced until all returns showed a reasonably uniform temperature.

After having been balanced manually, the system was switched to automatic control and adjusted to insure maintenance of design temperatures throughout the pool.

The panel-heating system was designed by Thermo-Radiant Consultants. The general contractor was California Builders Co., Inc. and the heating work was done by Robert Bruen and Son. All firms are established in Oakland, Calif.

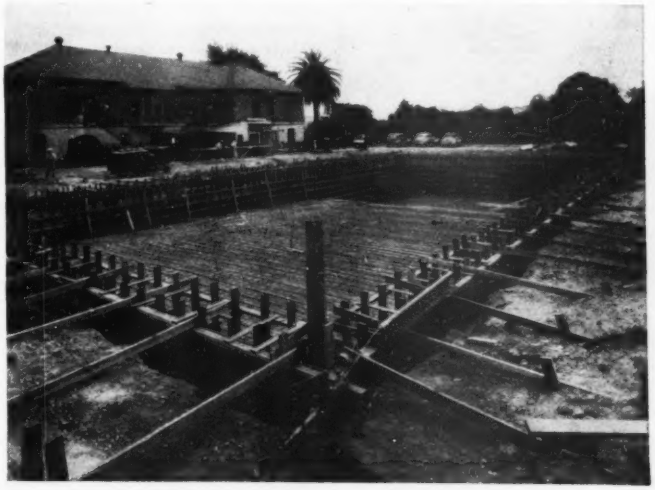

Fig. 3. COPPER TUBING WAS TESTED by hydrostatic pressure—after installation, but before concrete was poured—to insure minimum leakage.

Hydraulic Fill to Close River Reach For $17 Million Memphis Port

SOME TIME IN 1953—contingent upon the continuity of federal allotments of construction funds—the long-planned $17,000,000 Port of Memphis, (Tenn.) harbor is expected to be completed and placed in operation.

The completed facility not only will furnish an off-river harbor free from flood velocities, but it also will give Memphis an adequate barge-rail terminal and additional industrial area protected from floods.

Within ten years following completion of the project, waterborne commerce passing through the Port of Memphis is expected to be increased by 800,000 tons annually. This represents an estimated freight-rate saving of $1,400,000.

Preliminary construction has been in progress by the Corps of Engineers for nearly a year, leading to the eventual closing of the famed Tennessee Chute and confining all waters of the Mississippi to its present main channel on the north and west sides of Presidents Island. At present, about 7 percent of the mean low water flow passed through the chute.

After the chute has been closed at its upper end, it will be dredged to form the harbor, with a dredged channel outlet to the river at the lower end of the chute.

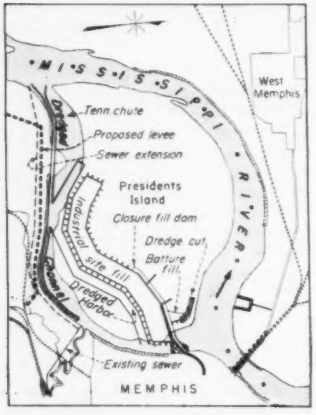

Industrial site of made fill

A huge industrial site, covering 960 acres and containing 48,000,000 cu. yd. of hydraulic fill, will be built up on Presidents Island paralleling the harbor. Trucks and rail access to the site will be across the closure fill at the head of the chute, leading to downtown Memphis.

Construction got underway in May 1948 and by the end of this June the following work is expected to be completed: (1) Installation of a willow fascine mattress 300 ft. wide by 2,700 ft. long at the head of President Island; (2) construction of a large "batture" embankment of dredged material forming an artificial foreshore for additional protection of the closure fill; (3) pumping of 750,000 cu. yd. of hydraulic material into the base of the closure fill; and (4) placing 1,000,000 cu. yd. of hydraulic fill in the upstream portion of the industrial site embankment.

Most of the work to date has been performed by leased dredge or government plant and hired labor. One contract, however, for the construction of 1,200 ft. of approach embankment on the east, or Memphis, side of the river, has been completed by McMullen, Larson and Co., Dallas, Tex., at a contract price at $65,000. This rolled-fill embankment, built to a top width of 100 ft., contains 96,000 cu. yd. of excavation. A 1,000-ft. hydraulic fill will connect this approach embankment with the east end of the closure fill.

FAMOUS TENNESSEE CHUTE in the Mississippi River (left background) will be closed at the north end to protect the new Port of Memphis Harbor, now under construction. Presidents Island (see map) will be connected to the mainland by a dam that will in effect convert the whole "chute" into harbor area. Dredging of new channels and the harbor proper will provide fill for new industrial building site.

First major operation was dredging a borrow pit 2,800 ft. long and extending 60 ft. below the 1947 low water reference plane, El. 184, to receive the willow mattress on its landslide sloping bank. This point (see accompanying map) will take the brunt of the river as it turns west and flows around Presidents Island.

All dredging in the pit—completed last September—was done by the 27-in. cutterhead dredge Cartagena, leased from the Standard Dredging Co., New York City. The material was pumped from 700 to 6,000 ft. under a 30-ft. lift, with an average discharge of 1,700 cu. yd. per pumping hour. Over 3,250,000 cu. yd. of material was pumped by the dredge into an area of 118 acres, which includes the batture embankment, the base of the closure fill, and the industrial site area.

Design plans called for the borrow pit to be dredged to a bottom width of 150 ft. The river side of the underwater excavation was permitted to seek its own slope, of about 1 on 3. The landside, however, was cut to a slope of 1 on 3½ to receive the willow mattress.

AN INDUSTRIAL AREA of 960 acres will be reclaimed with hydraulic fill dredged from Tennessee Chute to form the harbor and channel.

Dredged in three stages

The precision cutting of this bank, with the cutting-head working entirely under water, called for a high degree of skill in operating the dredge. This is how it was done—employing three stages of dredging.

During the first stage, which was started May 28, 1948, the head was lowered 48 ft. below the river elevation which was about 4 ft. above mean low water. One continuous cut was made from end to end of the area without changing the elevation of the cutter.

The cutter was kept 10 ft. back from the theoretical cut-bank line to keep from pulling down excess material. Upon completion of the first cut, about 15 ft. of backfill was left behind the dredge; giving 33-ft. net of initial cut. No attempts were made to clean the channel during the first pass of the dredge, since volume of excavation was the primary objective.

The same procedure was followed during the second stage, which was started Aug. 16. The head was dropped to 60 ft. below water. It was kept 10 ft. away from the final cut line. This cut left about 6 ft. of backfill behind the dredge. A 17-ft. rise in the river between the beginning of stage 1 and the completion of stage 2 washed in an estimated 250,000 cu. yd. of material that had to be removed.

All cleaning up was done during the third stage of dredging, which was begun Sept. 3 and completed in 15 days. Backfill was held to a maximum of 1 ft., as the final cut was made in three sweeps of the head, before stepping forward. This was where great skill was required in operating the dredge.

Making the final cut

One complete sweep was made across the bottom of the borrow pit, with the head set 60 ft. below low water. On the second sweep, the cutter was raised and swung into the bank with a coordinated swing to make the final bank-cut on the required slope of 1 on 3½. The top of this swing ended at a point about 20 ft. below low water.

Then the head was raised up to the water line, extended out to the required top of bank at that point, and brought down and in on a coordinated cut to 20 ft. below water. This completed the cutting of the underwater bank for the willow mattress. Final operation was to make two clean-up sweeps across the bottom of the borrow pit.

Installation of the fascine willow mattress followed completion of the borrow pit. It was started Oct. 1 and completed Dec. 31. River currents will soon fill up the borrow pit giving added protection to the mattress. Top of the mattress is 5 ft. above low water. The upper bank was graded with a barge-mounted dragline and will be riprapped. The dragline pulled its excavation down under water, for removal by the dredge.

In addition to the requirements for precision underwater cutting of the land bank of the borrow pit, an old stone-ballasted lumber mattress and a permeable pile dike extending across the area called for additional precautions in dredging.

Fitting the dredge to the job

An 82-in., four-vane impeller was used for the initial dredging by the Cartagena, using 3,500 ft. of 27-in. discharge line operating under a 25-ft. lift.

Upon reaching the old ballasted mattress, the impeller in the centrifugal pump on the dredge was changed to one having three vanes, 84-in. in dia. The discharge line was shortened to 2,000 ft. and the lift kept at 25 ft. More than 2,000 cu. yd. of old stone, up to 75-lb. size, were pumped through

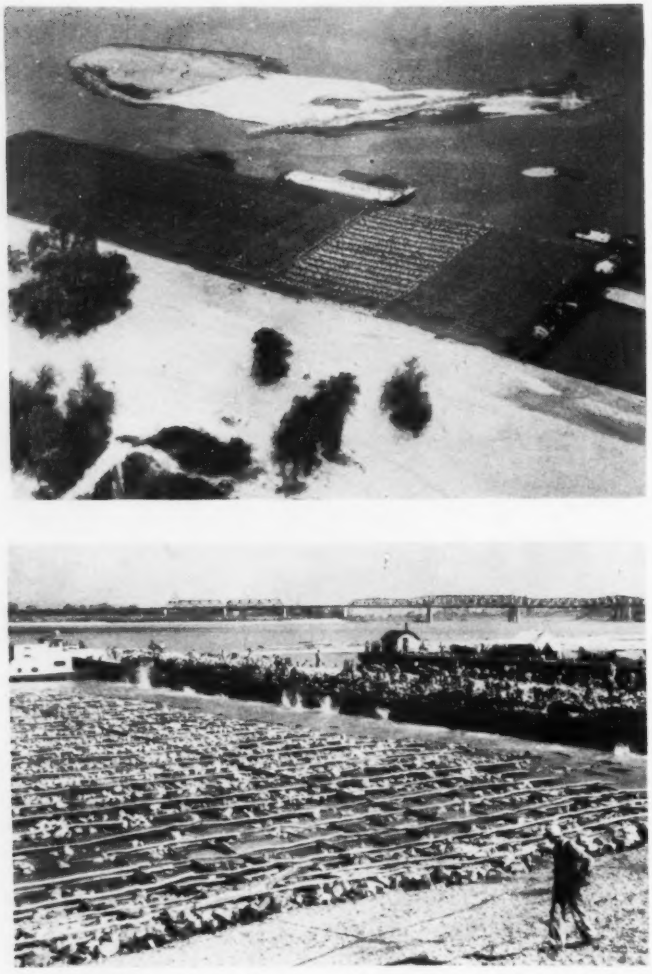

WILLOW FASCINE MATTRESS for protection of Presidents Island was ballasted with stone almost to the point of sinking (top photo), then sunk by additional stone cast from barge moving slowly downstream over mat.

this line, in breaking through the old lumber mattress.

After the site was cleared of the submerged mattress and permeable dike, the four-vane, 82-in. impeller was reinstalled in the pump and the discharge line lengthened to 5,000 ft. Subsequently, a four-vane 84-in. impeller was substituted when the length of discharge line reached 5,500 ft., followed by a four-vane, 88-in. impeller for pumping 6,000 ft.

Despite the trouble caused by the old stone ballast, and time spent in back-washing, cleaning out tree stumps, adding pipe and changing impellers, the dredging crew got 100 percent pumping time during 91.5 percent of the total contract dredging time of 2,660 hr. This was exclusive of time lost during breakdowns, for which no payment was made.

Long closure fill needed

Major items of construction planned for the future development of this project include the driving of 2,550 timber piles in three rows, each 1,700 ft. long. One row will connect the upper end of the willow mattress to the upsteam slope of the closure fill. The other two will be driven a short distance downstream, perpendicular to the industrial site fill.

The 6,800-ft. closure fill at the head of Tennessee Chute, expected to be started this year, will contain 6,000,000 cu. yd. of hydraulic fill. It will be built to El. 245 above Mean Sea Level, with a 100-ft. top width and side slopes of 1 on 8. Slopes will be surfaced with 6 in. of asphalt, topped with sod on the upper 10 ft. of the upstream side and the upper 30 ft. on the downstream side. The closure fill is not designed as an earthen dam, in the normal meaning of the term, since the differential of water level above and below the closure fill will not exceed 3 ft.

The industrial site fill also will be made of dredged material, mostly from the harbor and ship channel extending down the chute. It will be about 21,000 ft. long with a top width of 2,000 ft., and side slopes of 1 on 6 and 1 on 8. Top of this embankment will be El. 240, requiring about 20 ft. of fill on Presidents Island.

The harbor will be dredged to a 900-ft. bottom width and to 30 ft. below low water. The approach channel will be 300 ft. wide by 12 ft. below low water.

City to operate harbor

Other major items in developing the Port of Memphis harbor include 11 miles of rolled-fill levee on the city's side of the river to protect a potential industrial area of 6,800 acres. One pumping station will be constructed for internal drainage of this area, and 27,000 ft. of 60-in. sewer to prevent existing sewers from discharging into Tennessee Chute.

Memphis is furnishing all right-of-way for the Port of Memphis project, and will install all operating facilities such as power lines, railroad trackage, access roads, docks and slips. The completed port will be a non-profit operation of the Memphis and Shelby County Harbor and Port Commission.

Men in charge

The entire project is under the immediate supervision of the Memphis District, Corps of Engineers. Col. Louis H. Foote is district engineer and Earl Houston, project engineer. Associated in the planning and development of the project were: G. W. Miller, executive assistant to the district engineer; J. W. Pumphrey, chief, Engineering Division; C. G. Hutton, chief Construction Division; and John K. Patterson, general superintendent of the dredging work. The project is under the over-all direction of Brig. Gen. Peter A. Feringa, president, Mississippi River Commission.

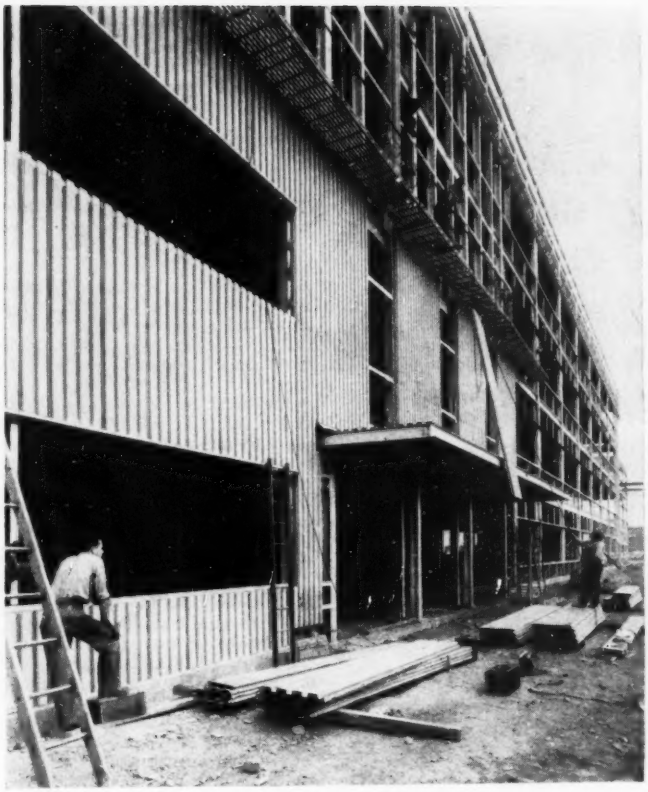

Insulated Stainless Steel Panels Inclose 4-Story Office Building

EXTERIOR WALLS of a four-story, air-conditioned office building under construction at the General Electric Co.'s Schenectady, N. Y., works are faced entirely with stainless steel. Selected to minimize maintenance, the stainless steel sheets form the outer surface of insulated, hollow steel panels that have a maximum thickness of 3 in.

This marks the first time use has been made of this metal in this fashion for a large building. It also signalizes continuation of the trend toward thinner walls and the use of panel construction.

Architectural treatment

Appropriately enough, the design of the office building harmonizes with that of an adjoining structure—a new turbine manufacturing plant, covering 20 acres of land—which is inclosed with insulated steel siding protected with aluminum paint. The offices occupy a 50x400-ft. area along one end of this factory.

Midway in the length of the 4-story building is the main entrance, framed by a steel canopy and glass-block panels. Vertical strips of windows are placed above the main entrance and above the side entrances near each end of the structure. Continuous strips of windows extend horizontally on both sides of the main entrance in each story.

The building has a structural steel frame, with columns spaced 20 ft. apart in the longitudinal direction. Channel girts are connected to the outer row of columns to support the steel wall panels.

The main wall panels are a 20-ga. fluted front sheet, 1½-in. of glass fiber insulation and a flat 18-ga. steel back sheet. They came to the job in sections 2 ft. wide and lengths varying from about 3 to 17 ft., convenient for one-piece installation between stories or between windows.

Uneven light reflection a problem

At the spandrels between the horizontal runs of windows, panels were first installed with a 20-ga. flat front sheet. However, due to the size of this panel, which is about 2 ft. wide by 5 ft. high, the perfectly flat surface desired was not obtained, because large depressions appeared in these sheets. Because of the high reflectivity of the stainless steel, the unevenness resulted in an unsightly appearance. To rectify this condition, an overlay front sheet, with outside moldings to act as stiffeners and to break up the light reflection on the relatively large areas, has been added.

Above the canopy at the center entrance and for the full height of the side entrances, 3-ft. wide, flat-faced vertical pilasters are formed of 18-ga. stainless steel sheets applied over the typical wall panels. No objectionable depressions occurred in the pilasters, because the 1-ft. wide sheets of which they are composed had flanged edges which stiffened the facing and enabled tight joints to be made.

Under the canopy at the center entrance, 3-ft. square pilasters were constructed of 18-ga. stainless steel, backed up by a 16-ga. steel plate, supported by the structural steel framework. Here, too, it was considered advisable to provide vertical moldings for stiffness and to break up the large flat areas.

Protective paper sticks to facing

Another problem encountered during construction arose as a consequence of the method of fabrication of the typical wall panels. In forming the front sheets, it was found necessary to cover the exposed face with paper to preserve the finish during rolling operations.

Some of the papers and adhesives tried "balled up" during the rolling operations, making dents in the sheets. Considerable difficulty was encountered in obtaining the proper paper and adhesive, but finally satisfactory rolling of the fluted sheets was obtained with a 30-lb. or 40-lb. heavy building paper, with full-drying type paste as an adhesive. The paper was left on the steel sheets to protect the exposed surface during transit and erection. It was necessary to steam the paper off after the panels were erected.

Design and construction were carried out for the General Electric Realty Corp. by Stone & Webster Engineering Corp.

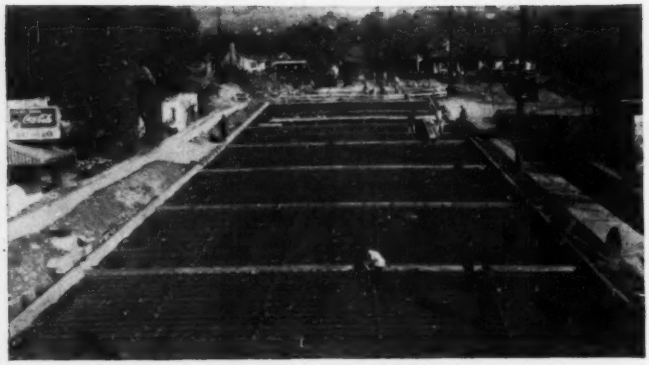

WARM-WEATHER WORK on installation of panel heating under pavement at a highway underpass in the Pacific Northwest makes . . .

COLD-WEATHER DRIVING EASIER by removing snow as fast as it falls, and preventing the formation of ice on steep highway grade, as . . .

Oregon Utilizes Hot Spring To Defrost Road Underpass

O. R. Kennen
Resident Bridge Engineer
Oregon State Highway Commission

TAKING ADVANTAGE of a situation not common to many areas—the presence of natural hot springs—the Oregon State Highway Commission is employing panel heating in a highway underpass to melt snow.

The installation is actually in two parts, on an underpass under the main line of the Southern Pacific Railroad in Klamath Falls, and on a bridge over an irrigation canal of the U. S. Bureau of Reclamation which parallels the railway line.

Difference in elevation of the underpass and the bridge necessitated a grade of 8 percent for a distance of 400 ft. Engineers decided that since this grade would be hazardous during the winter months, some provision should be made for clearing it of ice and snow.

Commission engineers designed and incorporated in their plans a grid system of ¾ in. wrought iron pipe, to be placed in the roadway deck of the four-lane concrete bridge, and in the underpass pavement. These pipes were to circulate an anti-freeze solution that had been heated by passing through a system of coils extending 300 ft. into a hot water well.

A 12 in. well was drilled to a depth of 420 ft., until an artesian flow of hot water at the rate of about 20 gal. per minute was encountered. Although this water had a temperature of 190 deg. F. at its greatest depth, an analysis showed that it contained a corrosive mineral which would hinder free circulation. It was therefore decided to circulate a mineral-free water, containing anti-freeze, in a closed system, using the well water for the heat source.

The heat exchanger installed consists of three 2-in. pipes extending 310 ft. into the well. Two of these pipes contain the solution returning from the grids, while the other contains the heated solution being pumped from the exchanger into the grids, so that twice as much solution is being heated as is being pumped out at any time.

A 2-in. header pipe runs from the well to the pavement, and parallel to the road for a distance of 420 ft.

Embedded in the pavement is 15,000 ft. of ¾ in. wrought iron pipe, made up into one grid for each series of fourteen 30-ft. road panels. Each of these fourteen panels is connected with the 2-in. header, and each panel is controlled by a valve near the junction of the header to insure an even flow of solution.

Whenever the water at the top of the well is above 145 deg. F., there is a natural artesian flow. However, as the solution from the grids cools the well water, this flow stops, and it is necessary to use a pump to remove the chilled water.

But, even without the aid of a pump, a week of sub-zero weather will lower the temperature of the water in the hot header to 37 deg. F., and the pavement would still remain above freezing.

With a 1-hp. pump running, solution leaves the heat exchanger at about 134 deg. F. and returns at 84 deg. F., while the chilled well water is pumped from the well at about 108 deg. F. Pavement temperature thus remains above 45 deg. F. under the most severe conditions.

Actually, a pavement temperature that would melt 1 in. of snow per hour would be adequate for the location, and since the temperatures in the pavement have ranged much higher, the surface becomes completely dry a few hours after a snowfall.

The circulator and pump are thermostatically controlled so that when air temperature drops and snow or freezing weather is approaching, the circulator automatically starts hot solution through the grids to warm the pavement in advance. In the well house assembly, thermometers are placed in the supply line, the return line, and in the well discharge line, and valves are installed in each of these three lines to facilitate repairs without necessitating draining the entire system.

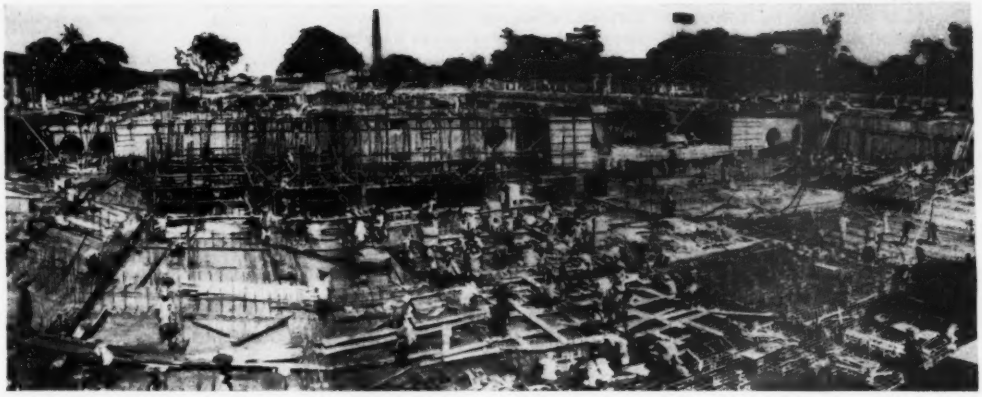

A GREAT CELLULAR RAFT of reinforced concrete was built to carry the Cossipore power station on the deep clay at Calcutta.

Displacement Raft to Support Large Power Plant in India

(McGraw-Hill World News)

A NOTABLE application of the displacement theory to foundation design is found in the new power station of the Calcutta Electric Supply Corp. in Cossipore, a suburb of Calcutta in India. Because of unfavorable foundation conditions found at the site, the entire structure is carried on a cellular "raft" extending to a depth below the surface of the ground sufficient to result in the removal of so much earth that part of the load imposed by the power plant on the subsoil will be offset. This plan brings the remaining unit load to within the capacity of the subsoil to carry without undesirable settlement.

Largest station in India

When completed, the Cossipore station will contain three 50,000-kw. and two 30,000-kw. steam-driven power generators, making it the largest and most efficient thermal station in India, if not in all of southeast Asia. It is being built in three stages to permit the earliest possible operation. Stage I includes the two 30,000-kw. units and one 50,000-kw. unit, all of which are expected to go to service late this year. Stage II will add a second 50,000-kw. unit early in 1951. The third stage will be started at some future date.

A model of the cellular-type foundation raft built for Stage I is shown in an accompanying illustration. It will carry both the power station superstructure and the administration building. A second section to support the structures required for Stage II also has been built.

Poor foundation conditions

Borings made at site showed the ground to consist of clays and clay-silts of poor bearing quality, harder and softer layers alternating and extending down to great depth.

To meet plant requirements, it was necessary to provide a turbine basement 12 ft. 6 in. below ground level and also to provide for accommodation of the circulating water mains and other services within the foundation. This led in any case to founding at a depth of 17 ft. below existing ground level over much of the area.

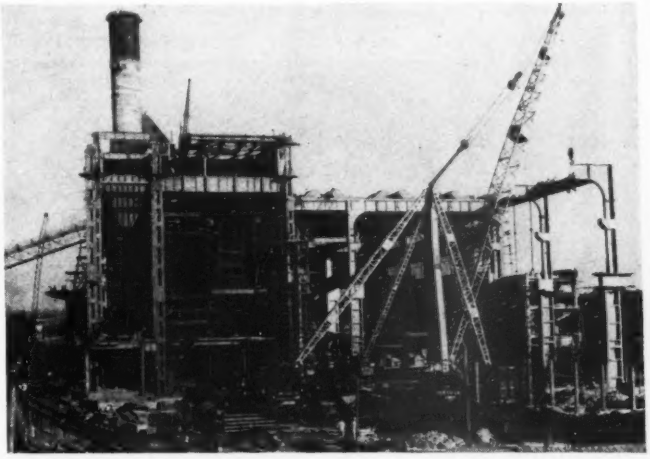

THE STRUCTURAL FRAME of the power station is of steel, designed to resist earthquake forces. Walls are to be of brick, and floors and roof of reinforced concrete.

Piles were considered but the foundation was very large in relation to any practical or economic length for friction piles, and general settlement would have been unavoidable. Since the site is in a seismic area, the comparatively low earthquake resistance of piles presented an additional difficulty.

It was calculated that by going to a depth of 21 ft. (only 4 ft. greater than imposed by non-civil engineering conditions) and using cellular construction sufficient displacement could be obtained to reduce the gross bearing pressure of 1½ tons per sq.ft. Soil tests showed that with the latter value, settlements, although appreciable, would not be objectionable. It was decided, therefore, that a cellular buoyancy-type raft should be adopted.

The over-all dimensions of the raft are: width 229 ft., depth 20 ft. 9 in. exclusive of 1 ft. 9 in. topping. The over-all length of Stage I and Stage II as now constructed is approximately 450 ft. Stage III will provide an additional 150 ft.

The purpose of the topping is to provide accommodation for pipes, cables and other necessary services, full details of which were not available at the time the main foundation was planned. This made it possible to go ahead with design and construction of the raft without waiting for the pipe and cable layouts to be completed.

The topping is of cellular construction filled with aggregate. Longitudinal and transverse concrete ribs 9-in. thick and on 8-ft. centers except at machine foundations and at cableways were poured on top of the raft deck to form cells 1 ft. 4 in. deep that later were filled with rammed hard-core aggregates to the level of the top of the ribs. Then a 5-in. concrete slab was poured over the entire area to form the floor of the power house.

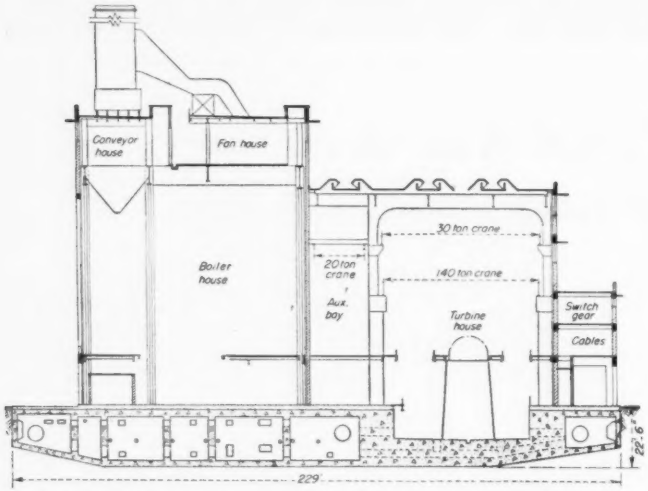

CROSS-SECTION through the power house showing the positions of the major elements with respect to the supporting raft of cellular reinforced concrete.

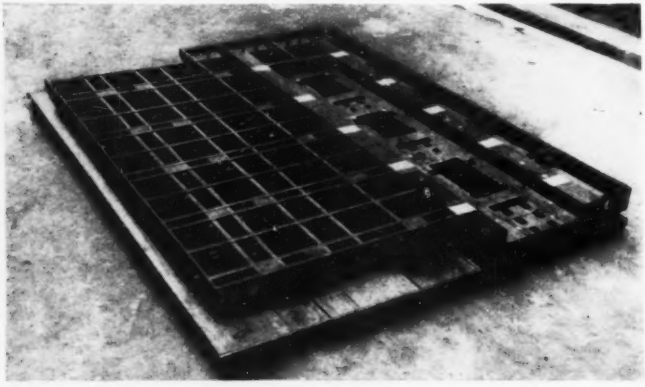

MODEL OF THE FOUNDATION RAFT that was used in the design studies. This shows the raft that was built for Stage I, which provided space for two 30,000-kw. units and one 50,000-kw. unit.

Cellular-type raft foundation

Investigation showed that a cellular-type raft of considerable depth afforded the best practicable method of keeping loads on the soil down to the prescribed limits, and at the same time providing a means of obtaining the necessary stiffness and strength in bending and shear to spread concentrations of surface loadings over large areas without appreciable flexing and distortion. Its hollow recesses are used for accommodating the 6-ft. diameter circulating water mains, and numerous other mains and cables required for operation.

The raft has been proportioned in plan so as to provide a center of resistance distant only a few inches from the center of gravity of its superimposed loading, thus reducing to a minimum any tendency to tilt after completion. The construction needed careful timing to insure that at all stages of work the foundation would be hydrostatically stable and undamaged under varying ground water conditions.

Underlying clay rises

Tests were made during excavation to determine the rise of the clay at founding level, and this varied from approximately 1 in. to 3 in. depending largely on the speed at which the various sections of the work were excavated and the rate at which the load produced by the structure could be reimposed to prevent further ground swelling.

Records of the settlement, related to the level of the founding material prior to excavation, are being maintained continuously. The settlements have corresponded generally to the loadings imposed by the superstructure and plant as it was erected. The level of the bottom of the Stage I foundation has only recently reached a level corresponding to that of the founding material prior to excavation.

Only small quantities of water had to be pumped out during excavation, which took place during the dry

period. Due to lack of excavating machinery, the excavation was a major problem. It involved the removal of some 70,000 cu.yd. of soil from the site for Stages I and II of the raft, and the excavation proper was entirely by manual labor.

Work on the construction of the excavation commenced in 1945 and foundation work for Stages I and II was essentially completed by November 1946. Stage I will go into service this year.

The boiler house and turbine house are provided with structural steel framework with brick walls and reinforced concrete floors and roof. The administration building, ash plant house, and the transformer annex have reinforced concrete frames with brick panel walls.

The consulting engineers for the whole project are Merz and McLellan of London, who supplied the data and photographs for this report to the Bombay representative of McGraw-Hill World News. Rendel, Palmer & Tritton, also of London, designed the raft and other reinforced concrete portions of the work on behalf of Merz & McLellan. The main contractors for the civil engineering work is the Hindustan Construction Co. Ltd., Bombay.

Author's Closing Comment on . . . . . .

A New Approach to Pavement Design

F. N. Hveem
Staff Materials and Research Engineer
California Division of Highways
Sacramento, Calif.

Editors Note: An article by F. N. Hveem entitled "A New Approach to Pavement Design" was published in the July 8, 1948, issue of Engineering News-Record, p. 134, and a discussion of that article by five authorities on flexible-pavement design was published in the Dec. 23 issue, p. 60. The following is Mr. Hveem's comment on that discussion.

Both Jacob Feld and K. B. Woods in their comment on my article on pavement design have pointed out the important effects of frost action and the question of considering annual rainfall distribution.

There can be, of course, no argument about the necessity for considering frost action and it may well be that this consideration becomes a predominant one; however, this phase was not discussed for two reasons: First, severe frost action is confined to only limited areas in California and therefore the background available is not considered sufficient to warrant expressing opinions on this aspect of highway construction. Second, it is believed that it should not be necessary to make arbitrary allowances for climatic conditions provided that it is possible by investigation, to determine the appropriate soil condition.

This statement applies to the practice followed in many areas of including a factor in design formulas which varies according to the local rainfall. In the opinion of the writer, this adjustment can be made more consistently and more logically by developing a test specimen which is either wet or dry or at some intermediate state depending upon the conditions which will surround the proposed project. In other words, it is necessary for the engineer to know in advance whether it is appropriate to test the soils in a state of high compaction or in a relatively loose condition and whether or not the soils will ultimately become saturated. This means that if the soil specimen when tested has the degree of density or lack of it and contains the amount of moisture corresponding to the worst conditions expected, it would then seem to be unnecessary to make any allowances for either rainfall or frost action.

Effect of underlying soils

I have no disagreement with Mr. Woods on the contention that there are many variables, particularly in the soil profile itself; however, it seems to be a rather general practice in highway construction to develop at least low fills requiring compaction and consolidation during construction so that in the majority of cases we are not dealing directly with the undisturbed soil in computing the necessary thickness of base and pavement layers required. It is for this reason that the term "basement soil" has been proposed to indicate the lowest level of the roadway structure, which in the majority of cases will be a soil layer that has been moved or disturbed and recompacted. If the layers of subbase, base and surface are to be placed directly upon undisturbed soil horizons in place, it is easy to see that the problem of testing and evaluating the variable conditions represented by the undisturbed soil could become quite exacting.

V. A. Endersby is correct in his assumption that the constants used to evaluate traffic are arbitrary and a more detailed analysis indicates that the relationship between loads of various magnitudes cannot be calculated by a simple constant applied to the number of loads in each category. In other words, the destructive effect of heavy loads does not bear a constant relationship to the destructive effect of the standard 5,000-lb. wheel load.

Determination of pavement thickness

Mr. Endersby asks whether the nomograph could not be extended to cover pavement thickness. The determination of pavement thickness is readily accomplished by means of the chart simply by assigning a resistance value to the base material and then computing the thickness of bituminous surface required. However, as a practical matter, the thickness of bituminous surface layers is more properly estimated from other considerations. In other words, it is a legitimate procedure to select the thickness of the pavement based upon practical construction considerations such as the degree of smoothness desired, assurance that the minimum thickness desired will not be reduced in local areas and then work backward through the chart to indicate the quality and thickness of base and subbase required to bridge the gap between the quality of the basement soil and the expected effect of traffic loads.

L. E. McCarty comments upon the absence of any statement as to a definite value for one of the principal stresses in which the resistance value is to be measured. We adopted a load amounting to 160 lb per sq. in. but have no reason to believe that this is a particularly critical matter and have found no evidence of marked variation in the ratio within a range of 100 to 400 lb. per sq. in. The use of the fifth root of the cohesiometer value is based entirely upon empirical data and no theoretical reason for this particular value has been developed.

FIELD AND OFFICE

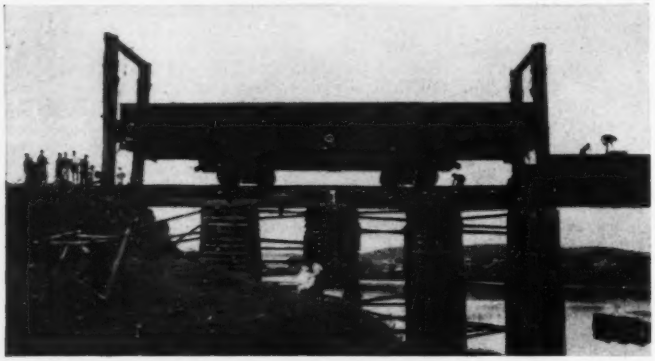

LOADING A 30-YEAR-OLD BRIDGE on a flat car, during a quick-change Chinese operation, engineers make a girder replacement job look simple.

Quick Bridge Replacement on a Chinese Railroad

Four old plate girder spans near Canton Hankow (China) Railroad were replaced recently by a method involving portal frames, temporary-track falsework and two flat cars.

These replacements were part of the railroad's program of rehabilitating 200 spans. The program was carried out largely by hand methods, with assembly at the sites, but here, not far from the railroad's headquarters, shop-fabricated 45-ton through plate girder spans 64 ft. long, 17½ ft. wide and 5½ ft. deep were set on existing piers and abutments.

Replacement steps were as follows:

1. Guyed timber portal frames erected over span ends.
2. Falsework cribs built under span.
3. Old span raised by five-part block-and-tackles on portals.
4. Temporary track on timber cribs.
5. Flat car run under span; span lowered and hauled to side track.
6. New span run in and picked up by rope falls.
7. Flat car removed, temporary track removed, new through plate girder lowered to its seats.

Best time for a span-switch was 5 hours.—W. K. Lee, Supervisor of Fifth Bridge Erection Gang, Canton Hankow Railroad.

Positioning a Pile Hammer With Electric Hoists

Electric hoists were adapted to sheet-pile driving on two erosion-control dams recently built on a creek in Denver. Temporary suspension uprights 30 ft. high, (one partly shown below) were erected 120 ft. apart on the stream banks, and one of two parallel suspension wire ropes was aligned over the sheet-pile location. The wire ropes carried a rectangular carriage from which hung an electric hoist that handled the piling and a double-acting steam hammer. The hoist was held in its horizontal position by two strap-iron struts. All carriage pulleys were idlers. Power for carriage travel came by separate cable from a second electric hoist mounted on the suspension tower nearest the work. A trailer-mounted 5-kw. generating set furnished the electric current. Gage Odell, of Denver, was the contractor for this project.

TRAVELING HANGING SCAFFOLD

MOUNTED ON RUGGED CASTERS and heavily counterweighted, this cantilevered I-beam assembly carried its hanging scaffold at fixed level on a cornice removal job in Los Angeles. I-beams were held in position by a framework of regular tubular-scaffolding elements. Pozzo Contracting Co. Ltd., Los Angeles, performed this work for the Santa Fe Railway.

SUSPENDED ELECTRIC HOIST handles sheet pile job. Note electric power and control cable hanging from hoist.

READER COMMENT

Rigid Codes Blamed on Labor

Sir: The present nation-wide situation of outmoded and obsolete building codes that have not kept pace with new developments in design and materials is one of the principal factors responsible for high costs in building construction.

A contributing factor to high costs is the attitude of some of the building trades in resisting amendments to building codes, even though approved by the superior judgment of qualified experts. A case in point was cited in the NEW YORK TIMES, Feb. 13, by Leonard Frank, president of Long Island Builders' Institute.

"Only last year, at the request of Mayor O'Dwyer, and approved by the building department superintendents in Brooklyn and Queens, a proposal was made to reduce the thickness of brick walls in multifamily houses occupied by no more than four families and no more than 20 ft. in height. This reduction of from 12 to 8 in. would have represented a desirable reduction in cost, and had been certified as structurally sound by architects and engineers. But the proposal was killed in City Council Committee after the bricklayers had strongly opposed, although no opposition was voiced by other trades, nor the Building Trades Council."

There is an unfortunate implication here. When matters concerning economies that will materially reduce high costs without detriment to the safety or use of the structure are decided from a political viewpoint rather than the professional or technical viewpoint of qualified designers or construction men, it is high time to remedy this condition detrimental to the public welfare.

ERIC FLEMING
Architect and Engineer
New Brunswick, N. J.

Construction Economics

Sir: Since R. D. Sannit's article on "Do Our Estimates Cost Too Much" has focused the "spotlight" on professional surveys as the means of eliminating wasteful estimating, it is fitting to mention the prevailing waste in design and construction which could be avoided by following the right procedure. Even though construction costs are now higher than ever, due to inflation in the price of everything, practically no effort is made toward more economy in construction design and the administration of bids and contracts.

It seems that the higher and more wasteful costs are, the more carelessly they are passed on to the consumer, so that gradually the industry is pricing itself out of the market through reckless inflationary business management. Plans and specifications are prepared with numerous and needless alternates, or revised several times because the designer does not have knowledge of the current material and labor cost incorporated within the structure wholly or in part. In many instances, two complete sets of plans are prepared in advance, in the event that bids run too high. Drafting costs are also high. Other projects are spread all over the landscape without consideration of cost or utility.

The wasteful duplication in estimating is negligible as compared with the waste in design and the uneconomic system of bidding and awarding contracts by lump sum, cost plus or upset fee basis. The methods used practically abolish the benefit of competition because neither the cost of proposed structure, nor the basis of bidding are pre-established scientifically.

The use of a professional preliminary assay or estimate for controlling the design, and a quantity analysis as a purchase requisition for the basis of bids and contracts, would eliminate waste and reduce construction costs at least 25 percent. But, who cares today about waste, even though there is a depression brewing for tomorrow? The slogan is "Today we live, tomorrow we die." The only way to maintain prosperity is through more production by eliminating waste and increasing efficiency of output.

G. SZMAK
Executive Secretary
Construction Surveyors Institute
101 Park Avenue, New York 17, N. Y.

Slope Taping Method

Sir: I read with interest the article in your Feb. 3 issue (p. 76) by Mr. Justus A. Villa on slope-taping. The method can, of course, be used to solve any triangle when two sides and an angle opposite one of them are given, provided that the angle is small.

The writer has developed a formula for the same purpose which does not require the use of versed sine or cosine tables and is not confined to small angles. By use of a 10-inch log-log slide rule, one can obtain a "correction" exact to 1 in 5000 or better for angles much larger than 4½ deg.



The method is based upon the algebraic expression: $c^2 - b^2 = a^2$ for a right triangle. Factored, this yields $c - b = \frac{a^2}{c + b}$. In the triangle $a\ b_1\ c_1$, $a = c_1 \sin \theta$, which is obtained directly on the D-scale, by multiplication. Then

$$c_1 - b_1 = \frac{(c_1 \sin \theta)^2}{c_1 + b_1},$$

also,

$$c_2 - b_2 = \frac{(c_1 \sin \theta)^2}{c_2 + b_2}.$$

Now $a^2 (= c_1 \sin \theta)^2$ is found on scale A directly above the product $(c_1 \sin \theta)$ on D. For a tentative correction one divides $(c_1 \sin \theta)^2$ by $2c_1$. When this correction is obtained, it is subtracted from $2c_1$ to give a more nearly correct value for $c_1 + b_1$, and a second division is made using this corrected value. This process can be repeated a second time, though it is rarely necessary with vertical angles normally encountered.

The second quotient (or the third) is the correction sought for triangle $a\ b_1\ c_1$. In like manner the correction for triangle $a\ b_2\ c_2$ is found. All the time the hairline is left at the setting $(c_1 \sin \theta)^2$, only the slide being moved to the corrected divisor. The distance sought, $A_1\ A_2$ is, of course, $c_1 + c_2$ minus the sum of the corrections, already computed.

R. T. BROWN
Assoc. Prof. of C.E.
University of Tennessee
Knoxville, Tenn.

Correction

Sir: In my article—"Horizontal Truss Designed to Clear Large Floor Openings" (ENR March 3, p. 61)—there are two errors.

In Fig. 2, the right-hand lower chord stress should be P/8, instead of 1 7/8 P as shown.

In the last paragraph, the second line should read "panel point is shown in Fig. 3."

OTTO EBEL
Designer, Consolidated Edison Co.
New York, N. Y.

BOOK REVIEWS

Sewage Works Financing

NOTES ON SEWER SERVICE CHARGES—By Henry W. Taylor, distributed by the American Public Works Association, New York-New Jersey Chapter, I. J. Casey, Jr., Town Engineer, Irvington, N. J., president. 27 pp. Mimeographed, 50c.

This is a discussion of sewer-service charges in the New York metropolitan area. Mr. Taylor's chief point is that service charges must be based not only on use of sewers but also on "readiness to use" and compares this latter factor with the fire-protection charge used in water rates.

Mr. Taylor's discussion lists certain formulas to determine an equitable charge for industrial wastes and tabulates sewer-service charges in use throughout the New York area. In unorganized areas, this discussion may provide a guide for establishing rate schedules for sewer service.

Route Surveying Manual

FIELD ENGINEERING — 22nd Edition (Searles and Ives)—By Philip Kissam. 422 pp. John Wiley and Sons, New York. $6.50, or $3.75 apiece for separate volumes: text and tables, respectively.

In this 22nd edition of the famous route surveying manual first written in 1880 by the late Messrs. W. H. Searles and H. C. Ives, Philip Kissam takes over as author. He had contributed one chapter to the previous edition; now he has rewritten many passages, added 40 new illustrations, prefixed a new introductory chapter, and deleted paragraphs on elementary surveying. New material includes the two-base method of precise altimetry, a discussion of photogrammetry and several curve and turnout surveying methods.

Prize Papers on Welding

DESIGN FOR WELDING—Edited by Robert S. Green, assisted by Douglas C. Williams and Charles B. Smith. 1,024 pp. The James F. Lincoln Arc Welding Foundation, Cleveland 1, Ohio. $2 in U. S., $2.50 elsewhere.

The book is composed of abstracts of 82 award papers from the recent "Design for Progress" program of the James F. Lincoln Arc Welding Foundation. Divided into sections on uses in the aircraft, automotive, railroad, watercraft, containers, furniture, machinery, welderies and structural fields, the papers describe the use of welding to reduce manufacturing costs, as well as to improve quality and performance. Sixteen papers are presented in the 222-page section on structures, covering such construction as bridges, outdoor substations, drilling masts, piers and structural frames for houses.

Miscellaneous Notes on Booklets and Reprints

A 1948 CEMENT AND CONCRETE REFERENCE BOOK has been published by the Portland Cement Association, 33 West Grand Ave., Chicago 10, Ill. The 87-page pamphlet contains facts concerning the history, manufacture and uses of portland cement and concrete. In a section on structural uses, different methods of concrete house construction are discussed, tilt-up wall construction is described, the development of reinforced concrete traced and the role of concrete in conserving the country's natural resources outlined.

SOME TIPS on design and construction techniques that can reduce maintenance on future public housing projects are given in a 28-page mimeographed pamphlet, "Maintenance Men Look at Housing Design." Obtainable for $1 from the National Association of Housing Officials, 1313 East 60th St., Chicago 37, Ill., it offers suggestions for site selection and development, foundations, walls, floors, roofs, heating, plumbing, electrical systems, painting, dwelling equipment and centralized maintenance facilities.

TO FACILITATE DISCUSSION of the best means for effectively resisting the forces that must be resisted by rockfill dikes, the Beach Erosion Board is publishing in the January issue of its BULLETIN a translation of the paper containing the Iribarren formula for calculating the sizes of stone and related slopes of riprap structures for resisting wave action. Copies can be obtained from the President, Beach Erosion Board, Corps of Engineers, 5201 Little Falls Road, N.W., Washington 16, D. C.

METHODS FOR PRODUCING LIGHTWEIGHT AGGREGATES are presented in a 121-page publication, Report of Investigations 4401, "Production of Lightweight Concrete Aggregates from Clays, Shales, Slates and Other Materials," prepared by the Bureau of Mines. The bureau classified materials as to their bloating or expanding characteristics—necessary to the production of aggregates. Studies were made of the causes of bloating and bloating agents were added in various ways. The best products, the investigators report, resembled a foam and not a sponge, and the strongest foamed products were those with the smallest sealed-in bubbles of gas. The booklet may be obtained free from the Bureau of Mines, Publications Distribution Section, 4800 Forbes St., Pittsburgh 13, Pa.

PLUMBING AND PUBLIC HEALTH—A Bibliography, in an up-to-date list of articles, pamphlets and monographs dealing with the relation of piping and plumbing fixtures to health protection. A limited number of copies are available for distribution. The bibliography may be obtained by writing to Public Health Service, Federal Security Agency, Washington, D. C.

New Engineering Books

ENGINEERING THE NEW AGE—By John J. O'Neill. 320 pp. Ives Washburn, Inc., New York 19. $3.50.

NUMERICAL METHODS OF ANALYSIS IN ENGINEERING—Arranged and Edited by L. E. Grinter. 207 pp. The MacMillan Co., New York 11. $5.80.

PATENT LAW—Second Edition—By Chester H. Biesterfeld. 267 pp. John Wiley & Sons, New York; Chapman & Hall, London. $4.

THEORY OF MODERN STEEL STRUCTURES: Vol. II: Statistically Indeterminate Structures and Space Frames—Revised Edition. By Linton E. Grinter. 312 pp. The MacMillan Co., New York 11. $5.25.

ELEMENTS OF MECHANICAL VIBRATION—Second Edition. By C. R. Freberg and Emory N. Kemler. 227 pp. John Wiley & Sons, New York 16; Chapman & Hall, London. $3.75.

UNIFORM BUILDING CODE—1949 Edition—By Pacific Coast Building Officials Conference. 304 pp. Pacific Coast Building Officials Conference, 124 West Fourth St., Los Angeles, Calif. $3.25 (Short Form, $1.50).

ENGINEERING LAMINATES—By Albert G. H. Dietz. 797 pp. John Wiley & Sons, New York; Chapman & Hall, London. $10.

NEW DIRECTIONS IN SCIENCE TEACHING—By A. D. Laton and S. R. Powers. 164 pp. McGraw-Hill Book Co., New York and London. $2.50.

(*Continued on page 122*)

The Election of November 2, 1948 GAVE NO MANDATE FOR SOCIALISM

The President and those who support his legislative program have objected to the substance of my previous editorial, which appeared under this headline: "Now is the Time to FIGHT SOCIALISM in Washington."

In that editorial I explained how Washington is poised to follow the disastrous policy of forcing industry to skimp on new plants and new equipment. That policy landed Britain in the numbing embrace of the Socialists. I cited the experience of Britain to show how such skimping on industrial tools can bring a nation to economic stagnation . . . and Socialism.

The President, in his recent Jackson Day speech, brushed aside this warning . . . "They are again trying to frighten the people with the old worn-out bugaboo that Socialism is taking over in Washington." Senator Francis J. Myers of Pennsylvania asserted that I was guilty of "warfare against any reasonable effort to keep our system of free enterprise working."

These criticisms may be sincere. But they are not well-founded.

I want to show why they are not well-founded by basing this editorial on Washington rather than Britain.

In Washington the Administration has proposed a legislative program, the key parts of which would clearly put the country far on the road to Socialism. Let us see how.

There are two steps in the process:

FIRST: The government by its taxation program undermines private industry so that it cannot provide itself with the necessary new plant and tools.

SECOND: The government itself steps in to provide the plants and equipment that it has blocked industry from getting. *That is Socialism.*

Here is how Washington is promoting Socialization of the steel industry—and of other industries.

Steel has been expanding its capacity and improving its equipment chiefly by plowing back its profits. During the last three years it has spent $1.4 billion for new plants and new tools. That was more than the companies had available from their own earnings. But profits provided more

continued on next page

than half of that money—more than $700 million. The remainder came from loans and from depreciation reserves set aside out of the earnings to replace worn-out equipment.

Profits must continue to provide the funds needed to pay for the bulk of the steel industry's necessary expansion. That is because private citizens, their income slashed by heavy taxes, have not been willing to buy steel stocks even at prices ruinously low for the companies and their present stockholders. The stock market currently prices the mills and other facilities of the nation's principal steel-producing companies at far less than fifty percent of the cost of reproducing them.

Let us take another example. Profits are essential to expansion in the electric light and power industry also. This year private companies are planning to buy $2 billion worth of new plant and equipment. To do that without going overboard in debt, they must sell to the public some $300 million worth of common stock. A squeeze on their profits would make that sale virtually impossible.

For tens of thousands of small business enterprises profits afford virtually the only practical source of funds for new equipment and expansion.

In the face of these and many other examples that might be cited, what is the most effective way to prevent industry from re-equipping itself and expanding is capacity to meet our essential needs?

Obviously, it is to cut down profits. And that is what the Administration is trying to do. The President has declared that steel prices are too high, and is demanding that Congress raise taxes sharply on all corporations.

There you have the first step toward socializing industry.

Next comes step two. Have the government supply the tools and equipment which, by taxation, it prevents industry from getting.

The Administration has proposed legislation to carry out this second step. It is called the "Economic Stability Act of 1949," for short, the "Spence Bill."

This bill gives the President the power to provide industrial facilities—in steel, power or any other industry—where he finds that a shortage is hampering or is likely to hamper the economy.

True, the bill says that the government is not to construct new plants if private companies will do it through government loans, on terms prescribed by the President. That may be just one step short of complete socialization. But it is only a short step. And the Spence Bill authorizes the government to take that step.

By itself, the Administration's "Stability Act" sounds harmless enough. It would have the government build plants only as a last resort. But it provides also that if private enterprise cannot turn out all the goods the country needs, the government can and should step in and provide the equipment to do it.

Now, take that power together with an Administration tax program that undercuts the ability of private enterprise to supply the new plants and equipment it needs out of its own earnings. That combination promotes government ownership and operation of industry.

And that is Socialism.

The American people, of course, have the right to live under any system they choose—Capitalism, Socialism, Fascism, Communism, or what-have-you. But before Socialism or any other "ism" is imposed upon us from above, the people should know the facts. If this editorial shall have contributed in some small degree to that end it will have served its purpose.

The election of November 2, 1948 gave no mandate for Socialism.

President, McGraw-Hill Publishing Company, Inc.

OUTSTANDING ADVANTAGES OF RAYMOND CONCRETE PILES

Raymond's successful experience for more than a half century has thoroughly proved these six outstanding advantages of Raymond Concrete Piles. These benefits, plus Raymond's expert personnel and specialized equipment, result in sound, dependable substructures that meet every requirement. You are invited to consult our engineers for the facts.

1 PERMANENCY

Every Raymond Concrete Pile is a permanent achievement, accomplished by a series of carefully planned steps which assure a safe subsurface support.

2 GREATER CARRYING CAPACITY

The use of rugged equipment and heavy hammers permits driving to high carrying capacities, and the soil pressures developed during driving are fully maintained.

3 UNIFORM BEARING CAPACITY

Regardless of variations in subsoil conditions, Raymond piles can be driven to any depth required to attain uniform bearing capacity for the whole foundation.

4 ENGINEERED FOR THE JOB

Raymond can provide the type of pile specifically adapted for your job.

5 SAVING IN CONSTRUCTION COST

Raymond's long experience on all kinds of jobs, the ready availability of equipment and the relatively shorter lengths of Raymond piles compared to some types, ensure genuine economy in foundation costs.

6 COMPLETE SATISFACTION

By the satisfactory completion of over 14,000 contracts, involving more than 50 million feet of piling, Raymond has established a world-wide record of achievement.

RAYMOND CONCRETE PILE CO.

Branch Offices in Principal Cities of United States and Latin America

140 CEDAR STREET · NEW YORK 6, N. Y.

AROUND THE WORLD
52 YEARS FOUNDED 1897 OF PROGRESS

THE SCOPE OF RAYMOND'S ACTIVITIES

Includes every recognized type of pile foundation—concrete, composite, precast, steel, pipe and wood. Also caissons, underpinning, construction involving shore protection, shipbuilding facilities, harbor and river improvements and borings for soil investigation.

the Paver of the future - Jaeger's BP-5



1. AUTOMATIC MATCHING of any adjacent course, curb, gutter or other grade line.



2. TWIRL A WHEEL TO CHANGE WIDTH: Lays any width 5'8" to 12'6", without adding parts.

3. SMOOTHEST RIDING SURFACES: 12' longitudinal floating runners equalize screed level.

4. NO PREMATURE SEALING: Weight and traction are on the hard subgrade or completed course —never on the newly-laid surface.

5. MORE UNIFORM MAT: Fast-oscillating, bevel-toothed screeds, tiltable as needed, work material to a uniform density not possible with tamping.

6. LAYS FLUSH TO CURBS and blends perfect-sealing joints between lanes.

7. BURN-PROOF SCREED HEAT with modern hot air system (up to 500°).

8. EVERY TYPE OF MATERIAL: Hot or cold, laid in thicknesses up to 6" as fast as trucks can deliver to the big 6-ton hopper.

To the basically correct principles of paver design long-proved in earlier model Jaeger pavers, the Model BP-5 adds many important improvements in automatic precision and adaptability to the varied materials and conditions encountered in road, street and airport work. For complete information, see your Jaeger distributor or send for Catalog BP-9, describing numerous advantages of interest to contractors and highway engineers. Early deliveries will be limited to orders already on hand.



Diagonal Screed Finishers

Remixing, Compacting Spreaders

Mobile Truck Pavers



2 Speed, All-Steel Hydro-Hoists

JAEGER "Sure Prime" for all pumping jobs

No other pump is built to handle water like the Jaeger "Sure Prime". Two separate, simultaneous priming actions prime it faster and more surely. Extra power in its engine, an ever-tight seal, and water passages 6 times larger than the intake insure the vacuum, capacity and pressure to pump big volume, against higher heads, move water at the lowest known cost per gallon to drain or supply your job.

Overall enclosures, exclusive with Jaeger, insure a dry, quick-starting, smooth running engine in all weather. Close-grained shell castings *armored against wear*, long-life Lubri-Seal always accessible for inspection, adjustable hardened impellers and replaceable liner plates mean thousands of extra hours of service for your money.

1½" Bantam

1½" to 10" sizes — capacities 3000 to 240,000 gph for dewatering service. Also pressure pumps including Super-Jet pumps for up to 275 lbs. pressure.



10" Portable

"Air Plus" pressure does 4 days' work in 3

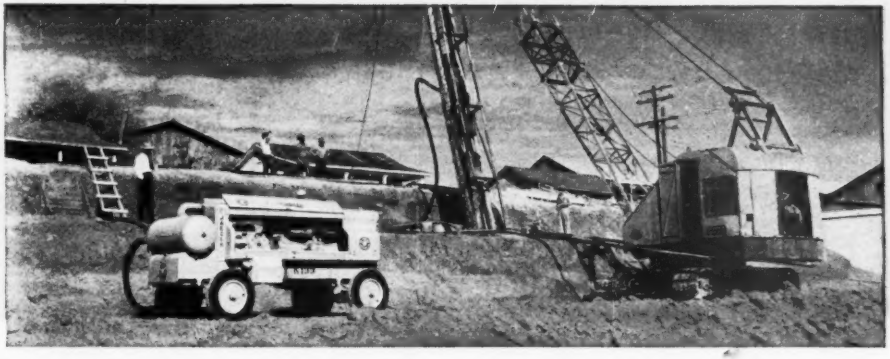

Jaeger "new standard" compressors, delivering 15% to 20% more air than old standard ratings set in 1932, operate today's air tools at full pressure (90 lbs. instead of 70 lbs. at the tool), develop their full hitting power and drilling speed, actually do 30% to 40% more work per day.

This 15,000 lb. pile hammer, for example, requires 565 cfm of air at 100 lbs. for top efficiency and gets it from a Jaeger Model 600. Two big wagon drills will drill 30% to 40% more footage with this Model 600 than with any 500 ft. compressor. Other sizes, 75 ft. for one heavy paving breaker, 125 ft. for two breakers, 185 ft. for three, 250 and 365 ft. for larger tools, offer you comparable advantages.



Concrete, Bituminous Mixers

JAEGER

engineered equipment

Sold, Rented, Serviced in 130 Cities of U. S. and Canada

THE JAEGER MACHINE COMPANY

Columbus 16, Ohio — Cable: BIGAIRLITE

WHERE THE GOING IS *Really* TOUGH!

The PROBLEM — How to move a mountain of rock quickly and at low cost with a minimum of maintenance shutdowns.

The SOLUTION — A MARION 151-M, 6 cubic yard shovel, designed for continuous service in rock.

The MARION 151-M is the shovel FOR YOU!

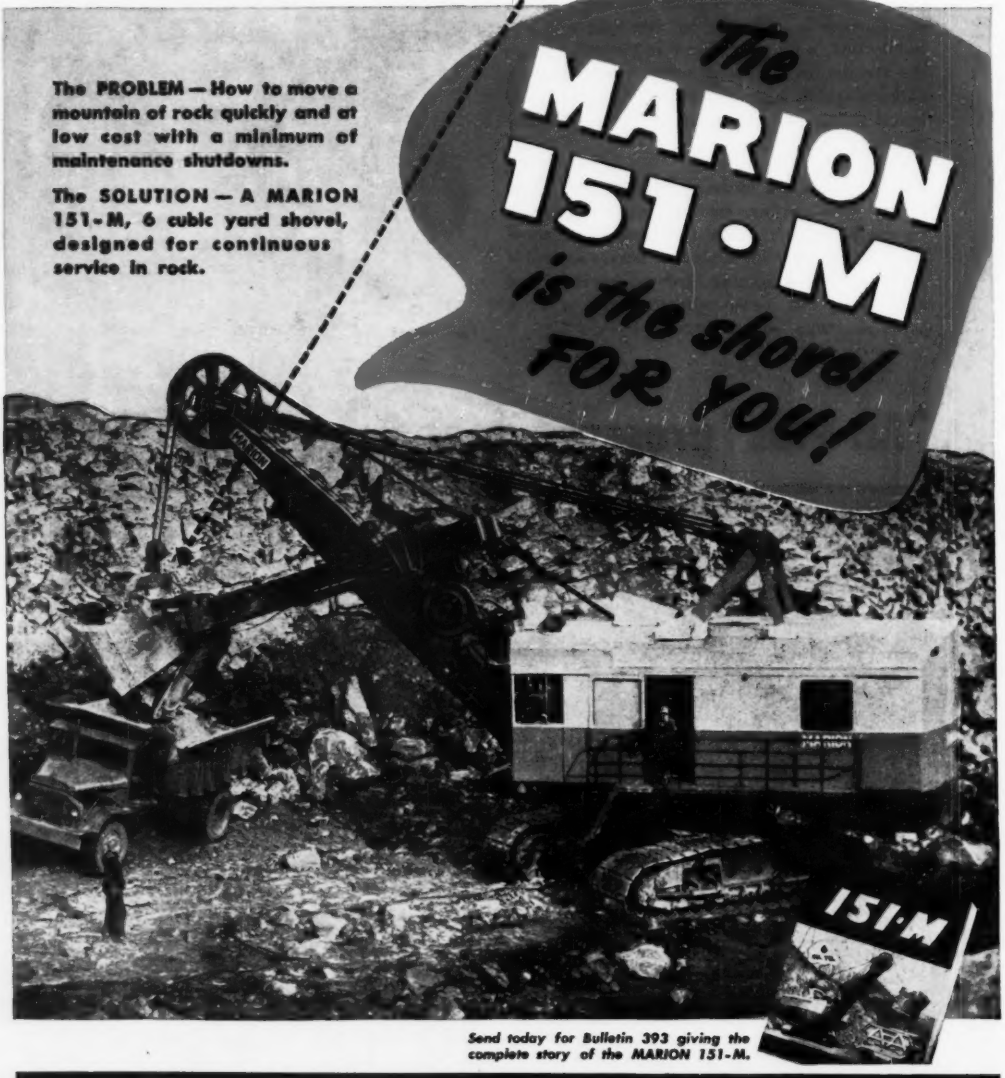

Send today for Bulletin 393 giving the complete story of the MARION 151-M.

MARION

POWER SHOVEL COMPANY

MARION, OHIO, U. S. A.

Offices and Warehouses in all Principal Cities

NEW PRODUCTS

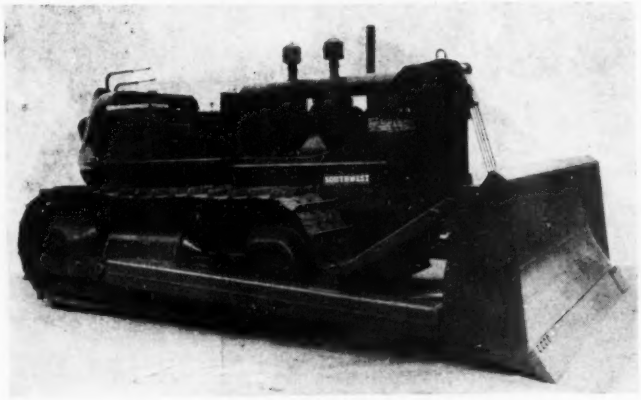

Bulldozer and Trailbuilder

New bulldozer and trailbuilder equipment for use with Allis-Chalmers HD-19, HD-14 and HD-10 tractors has been developed. New units have eliminated the overhead "A" frame structure commonly used. Now it is the radiator guard type mounting—rugged and dependable. This mounting can be furnished for either rear or front mounted control units.—SOUTHWEST WELDING & MFG. CO., ALHAMBRA, CALIF.

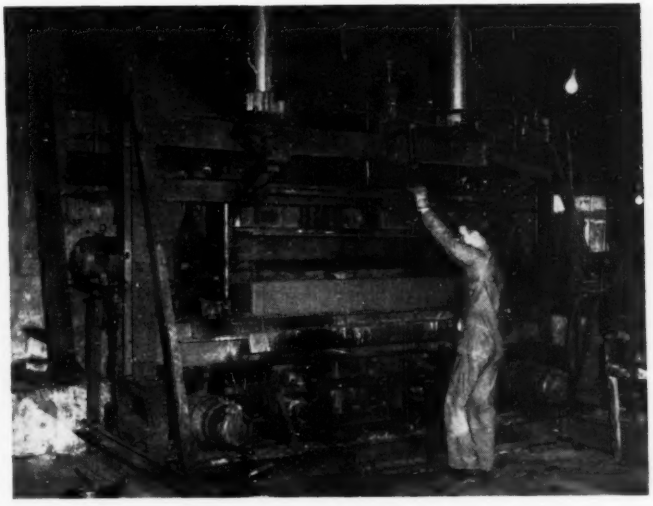

Concrete Cribbing Machine

No longer must this durable product be made exclusively by hand. The Universal Concrete Pipe Co. of Columbus, Ohio, has built, for its own use, what is believed to be the first cribbing machine in the country. Universal now makes concrete cribbing strictly by machine. During a six and one-half hour period, 132 six-ft. long "header" type pieces can be made on the machine. The cribbing can be used for railroad and highway embankment retaining walls, flood control and levees, soil erosion work, loading docks, bridge abutments, grade crossings and the conservation of valuable industrial property. In the picture, Clyde Wilson, crib machine operator, is shown pulling the lever that raises a "header" from the tamping groove.—THE UNIVERSAL CONCRETE PIPE CO., COLUMBUS, OHIO.

Earth-Moving Equipment

Three new models of Wooldridge cable-controlled earthmoving equipment are in production. These include two four-wheel scrapers and one bulldozer. Scrapers have struck capacities of 8.5 cu.yd. and 12 cu.yd. New scrapers, with unobstructed front apron opening of 60 in., feature rear-draft fulcrum leverage and pivot-tilt bowl to assure faster, more efficient loading and dumping of greater volume. Other engineering advances include higher yoke clearance and greater ruggedness throughout. Cable is easily accessible and reeved in straight lines without reverse bends for increased life and easy replacement. Shorter wheelbase insures quick turning in crowded quarters. All sheaves are mounted away from dirt and load. New bulldozer is designed for rugged service on Allis-Chalmers big HD-19 tractor. Moldboard of ½-in. plate is heavily gusseted to withstand great abuse. Shipping weight of blade is 8,200 lb.; its removable tips are of 1-in. manganese-molybdenum alloy.—WOOLDRIDGE MFG. CO., SUNNYVALE, CALIF.

Heavy-Duty Glove

Made of specially treated chrome tanned cowhide for long wear, the glove has a canvas back with elastic strap to overcome hand fatigue while providing a cooler feeling and snug fit. All necessary seams are steel-sewed and the seam along the forefinger has been eliminated. Glove has a short cuff with tape binding.—AMERICAN OPTICAL CO., SOUTHBRIDGE, MASS.

Concrete Mixer

New 3½-S non-tilting concrete mixer has drum and drumheads of heavy steel plate which revolve on wide solid rubber rollers with guides to hold true running location and prevent weaving of drum. Automatic water tank for predetermined quantities of water for each batch. Drum is gear-driven, and heavy roller chain transmits power from engine to countershaft. Complete unit weighs 1,000 lb.—MULLER MACHINE CO. INC., METUCHEN, N. J.

New Radiant Fluorescent

Guthlite, Jr., offers a new outstanding appearance, unusual lighting effect and fine lighting performance. When illuminated, side and spill lighting give it a beautiful radiant glow. This luminous effect is accomplished without glass or plastic panels, so there is no breakage or warpage. Diffuse aluminum louvres provide comfortable shielding and a low brightness at normal angle of view. It features a simple,

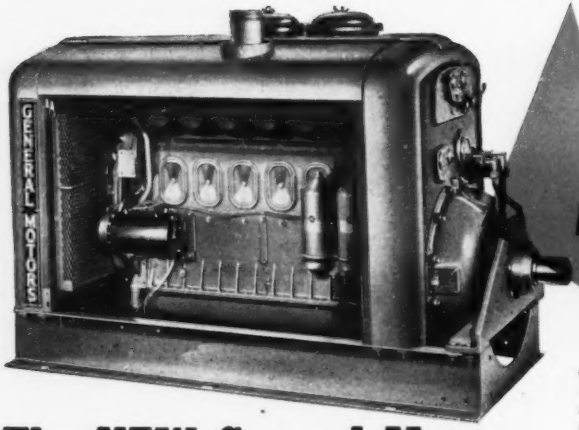

A Combination Torque Converter and Fluid Coupling *Integral with the Engine*

General Motors 71 Diesels equipped with the new GM Torque Converter take up no more space or weight than the same engines with conventional friction clutch and power take-off. Available in 3-, 4-, and 6-cylinder single engine units, Twin 4 and Twin 6 models having engine ratings from 75 to 300 H.P.

The NEW General Motors DIESEL ENGINE-TORQUE CONVERTER UNIT

HERE is a complete, integrated Diesel engine-torque converter unit that combines the inherent efficiency of the GM 2-cycle Diesel engine with the features and advantages of *both* torque converter and fluid coupling. It provides *torque multiplication up to 4 to 1* for starting variable heavy loads. It also provides *highly efficient transmission of power* during light load periods by *automatically shifting to fluid coupling* in the upper speed range.



In the new GM Torque Converter, oil does the work. Automatic transition from torque multiplication of 4:1 at stall to 1:1 in upper speed range.

A smooth, uninterrupted flow of power, delivered through a liquid, *prevents engine stalling* under any load and *protects both engine and driven machinery from sudden shocks.*

One Manufacturer—One Responsibility

Up to now most engines and hydraulic drives have been separate units. The result—compromise designs and divided responsibility. Now General Motors offers a new torque converter specifically designed and manufactured as an integral part of the General Motors Series 71 Diesel engine. It is a self-contained unit built by one manufacturer providing a long needed saving in space and weight as well as certain desirable operating characteristics not available before.

This new power unit will get the most work done in the least time because the engine operates in its most efficient speed range at all times—delivering maximum engine horsepower regardless of the speed of the load. *Maximum torque to start heavy loads PLUS maximum horsepower to keep the load moving.*

Everyone with a hard job to do in the oil fields, in construction, in mining or in logging should have all the facts about this compact, flexible GM Diesel Engine Torque Converter unit. *Write today for a complete description.*

DETROIT DIESEL ENGINE DIVISION

SINGLE ENGINES . . Up to 200 H.P. DETROIT 28, MICHIGAN MULTIPLE UNITS . . Up to 600 H.P.

GENERAL MOTORS

GM GENERAL MOTORS DIESEL POWER

DIESEL BRAWN WITHOUT THE BULK

easy-to-open hinge so that louvres may be hinged to either side, or completely removed for easy lamp and starter changes.—THE EDWIN F. GUTH CO., ST. LOUIS 3, MO.



Welding Cracked Motor Blocks

There is a new, low-heat electrode for welding cracked cast iron motor blocks which may be used for on-the-spot repairs without any preheating or dismantling of equipment. This special Eutectrode 24/49 insures weldability without application of high heat, without cracks or cross checks. Completely machinable through the weld and weld zone.—EUTECTIC WELDING ALLOYS CORP., 40 WORTH ST., NEW YORK 13, N. Y.

Lightweight Chain Saw

The lightweight die-cast magnesium construction of this gasoline engine chain saw makes it easy for one man to carry. It makes horizontal, vertical or any angle cuts—indexes to any desired angle for felling or bucking. Two gear ratios—easily interchanged—provide a slow speed for cutting big trees—a high speed for cutting small ones. The round nose bucking bar makes it possible to start a cut with the tip of the round end . . . and also permits felling and bucking trees with a diameter twice the bar's length by cutting one-half from one side and the other half from the other side. The engine throttle can be operated from the horizontal cross-bar as well as the right handle so that the engine speed is under finger-tip control whichever handle is being used. This new one or two-man chain saw is available in 18, 24, 36, and 38-in. sizes.—MALL TOOL CO., 7740 SOUTH CHICAGO AVE., CHICAGO 19, ILL.

Hollow Metal Entrance Door

New design of senestra hollow-metal entrance door is furnished in one standardized size of 3x7 ft. May be used in single or double openings. Doors come complete with frames and hardware machined, fitted and ready

These experimental wood-treating cylinders vary in size from 2" x 12" to 4' x 20'. It is possible to make detailed studies ranging from test-tube quantities to semi-commercial quantities.

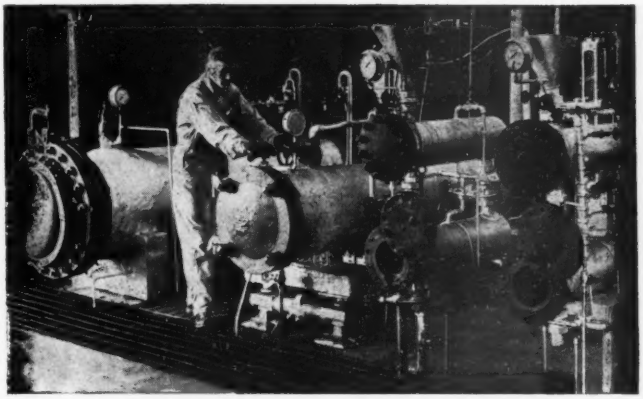

HOW KOPPERS FAMOUS TECHNICAL LABORATORY

helps improve serviceability of wood

The Koppers Technical Laboratory at Orrville, Ohio is one of the most complete wood-treating laboratories in the world. Here, Koppers experts, working with the best in modern equipment, lead the field in the development of improved wood-preservatives and techniques.

In addition to other research, the staff of this laboratory is constantly working on the following projects: a continuing study of pressure-treatment with creosote; the evaluation of all known treating materials; the development of new preservatives.

▸▸ How Koppers technical facilities can help you!

This famous Koppers Technical Laboratory is now equipped to handle your specific wood-treating problems. Its technical staff welcomes your inquiries, and will gladly recommend the *proper* technique of treatment . . . the *proper* type of preservative to meet your individual needs. Write for further information.

KOPPERS **PRESSURE-TREATED WOOD**

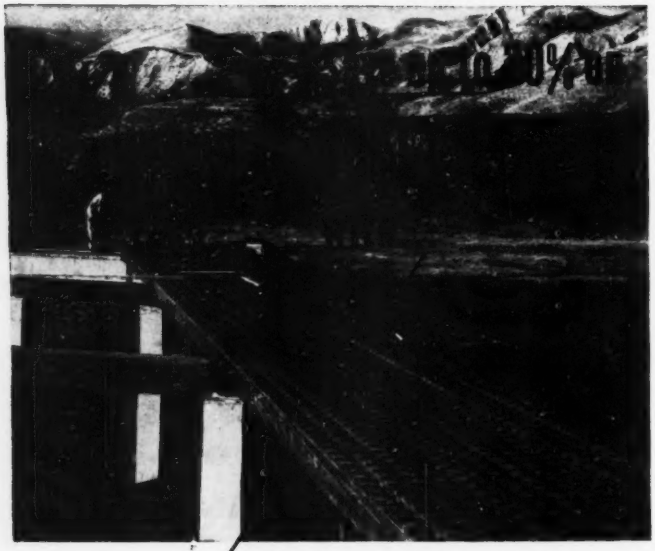

91-foot Composite Deck bridge built over Tres Pinos creek on Panoche road, 20 miles south of Hollister, California.

Composite Deck Bridges

Low cost, long lasting bridges are made possible by the Timber Structures Composite Deck bridge which combines the economy of wood construction with the serviceability of concrete.

The Composite Deck bridge is a modern improvement on construction which has been proved through years of service. Road surface is concrete, poured over preservative treated laminated panels and permanently keyed to the deck. Construction costs are cut in three ways.

Construction time reduced.

Requires minimum of heavy equipment for construction.

No false work, scaffolding or concrete forms.

Minimum Maintenance... Long Life

Structurally, the Composite Deck bridge is as adequate and permanent as other types. There are no joints or parts to deteriorate or become loosened. Preservative treatment gives permanent protection against termites and rot. Painting is not necessary for maintenance.

A folder, "Composite Deck Bridge for Endurance and Economy", gives detailed information about this modern bridge. Get a copy from the Timber Structures office nearest you, or write us for it.

TIMBER STRUCTURES, INC.

P.O. Box 3782 • PORTLAND 8, OREGON

Offices in Boise, Idaho; Eugene, Oregon; Lawrenceville, N.J.; Chicago; Dallas; New York; Seattle; Spokane.

TIMBER STRUCTURES, INC., OF CALIFORNIA — Oakland and Sacramento

Local Representatives Coast to Coast

to assemble in order to save installation time for builders. Doors may be hinged right or left to swing in or out and, if desired, are equipped with bronze push-and pull bars and bronze ball bearing hinges.—Detroit Steel Products Co., 3141 Griffin St., Detroit 11, Mich.

Metal Primer

Rust-O-Primer is a vinyl base, quick drying wet primer applicable over wet or dry, clean or rusted metal including steel, aluminum or galvanizing. Purpose is to provide a hard, paintable foundation for any type of paints.—Wilbur & Williams Co., Greenleaf and Leon Sts., Boston.

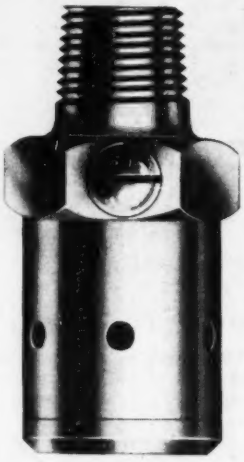

Self-venting Valve

Here is an automatic hot water air valve which the manufacturer claims does away with manual venting of radiators and saves money by eliminating air which interferes with the best radiation.—Taco Heaters, Inc., 137 South St., Providence 3, R. I.

New Type Water Pump

A new type of water pump which reduces the cost of deep wells has been developed and patented. It is a jack pump type taking a 16-in. stroke at the rate of 50 to 60 strokes per minute. The long, fast stroke permits pumping small-bore holes at a high production rate. The surge resulting from this action if a mechanical head were used is eliminated by the new design. The driving head is hydraulically operated and uses compressed air for balance. The motor transfers the fluid from the low pressure to the high pressure accumulator to build up

VITRIFIED CLAY LINER PLATES

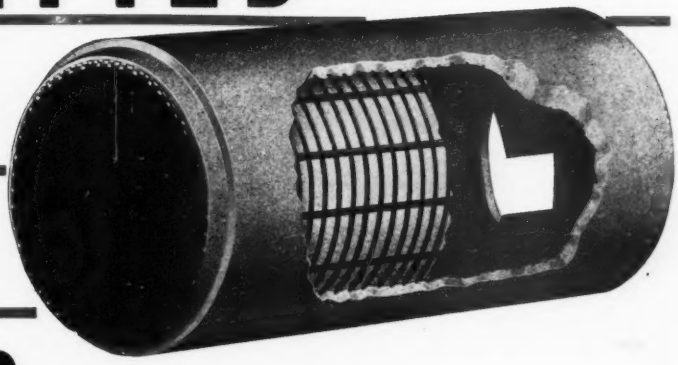

and

Plate Lined Reinforced Concrete Pipe

Meet and Exceed all Specification Standards for

MATERIALS	PHYSICAL TEST REQUIREMENTS
DESIGN	CRUSHING STRENGTH TESTS
CURING	ABSORPTION TEST
WORKMANSHIP	UNIFORMITY

PRACTICAL ADAPTABILITY ON THE JOB

Available in Full Size Range . . . 12" to 102"

★ **UNIVERSAL VITRIFIED and UNITED STATES CONCRETE PRODUCTS**

Sewer Pipe (Vitrified)	Septic Tanks
Sewer Pipe (Concrete)	Drain Tile
Aerodrane Filter Block	Flue Lining
Slipseal Sewer Joint	Stove Pipe
Segment Block	Chimney Tops
Meter Boxes	Chimney Pots
Ship-Lap Wall Coping	Fire Brick
Liner Plates	Fire Clay

UNIVERSAL US CONCRETE

Sales Offices:

Baltimore, Md., Box 7769, Halethorpe Branch, Telephone, Elkridge 790 — Cincinnati, Ohio, P. O. — Newton, Ohio, Box 215, Telephone, Locust 7846.

For Best Pipe Coupling . . .
Specify
UNIVERSAL TYLOX
Flexible Rubber Gaskets
Leakproof for life of the line

Factories: **Baltimore, Md., Cincinnati, Ohio, New Philadelphia, Ohio, Palmyra, Ohio (2), Uhrichsville, Ohio (2).**

UNIVERSAL SEWER PIPE CORPORATION
UNITED STATES CONCRETE PIPE COMPANY

GENERAL OFFICES • 1500 Union Commerce Building • CLEVELAND 14, OHIO

You can mold ducts in concrete as easy as ABC with . . .

DUCTUBE

The revolutionary pneumatic tubing especially designed for molding holes in concrete and other mastics

A Ductube is inflated, on the job, with an ordinary tire pump or compressed air line.

B Ductube is placed to mold concrete conduit (ducts) as desired. Concrete is then poured.



C When concrete has set, Ductube is deflated and removed, leaving smooth-bore ducts.

ELIMINATES NEED FOR PIPE OR CONDUIT . . . SAVES TIME AND MATERIAL

Ductube is ideal for molding ducts right into concrete walls, floors, columns, beams, or slabs . . . for telephone or electrical wiring, drains, air radiant heating, or any one of numerous other applications suggested by *Ductube's* versatility. *Ductube* molds clean, smooth-bore ducts (either straight or curved, vertical or horizontal), thus eliminating the need for metal pipe or conduit. Available in sizes for producing ducts of 1, 1½, 2 and 3 inches in diameter. *Ductube* can be re-used many times because its special design causes it to free itself, as it is deflated, from the hardened concrete. *Ductube* is truly a miracle of economy worthy of your investigation.

FREE ILLUSTRATED FOLDER TELLS HOW DUCTUBE CAN HELP YOU . . . WRITE DEPT. E. FOR IT WITHOUT DELAY

DUCTUBE COMPANY

940 Shoreham Building Washington 5, D. C.

Stang WELLPOINT SYSTEM

For KNOW-HOW ENGINEERING SUPERVISION EQUIPMENT to keep jobs DRY

The Stang System has proved its efficiency and economy on both large and small jobs all over the United States. Stang engineering and supervision in planning, installation and operation insures a DRY JOB at all times.

JOHN W. STANG CORPORATION

2 Broadway New York 4, N. Y.

8221 Atlantic Ave. P. O. Box 631, Bell, Cal.

air pressure for a pneumatic counterbalance. Then, the motor acts on the hydraulic pump only. The unit consists of a Browne & Sharp fluid pump, a Chicago Belt piston and a transfer valve. The manufacturing operation consists mostly of welding the purchased parts. Installation cost for a 100-ft. well is $500 and the pump sells separately, not including electric motor, for $172. Efficient use of fractional horsepower motors is said to be possible because of very low initial friction. One installation, costing $1,050, is pulling 240 gallons an hour from a depth of 241 ft. with a ½-hp. motor. Another pulls over 180 gph. from 140 ft. with a ¼-hp. motor.—Floyd D. Hyde, Ray L. Butter, B. F. Darnell and Robt. L. Stockton, El Cajon, Calif.



Tractor Winch

Single-drum unit has maximum capacity of 7,500 lb. single-line pull on first layer of cable. Adaptable to many industrial wheel type tractors, it can be easily installed or quickly removed when the power take-off shaft is required for other attachments. Fairlead rollers allow a sharp offlead of the cable to either side and permit easy moving of materials in tight spots. Winch is equipped with a hand-operated contracting band brake. A drawbar built into winch frame allows tractor to perform regular towing jobs without removal of winch.—American Hoist & Derrick Co., 63 S. Robert St., St. Paul 1, Minn.

Steel Casement Windows

Made of cold rolled steel sections, 1¼ in. deep, are designed for strength, rigidity and to permit double glazing with any types of insulating glass. Surfaces offer a smooth base for finishes. Double weathering contact all around frame and ventilator results in complete weathering and water tightness. Corners are mitered and butt-welded, insuring joints that are tight and smooth. Casements are finished in a paint baked on in infra-red baking ovens for durability. Exterior glass may be cleaned from the inside.—Steelcraft Mfg. Co., Cincinnati.

Announcing the New

P&H DIESELS

2 CYCLE

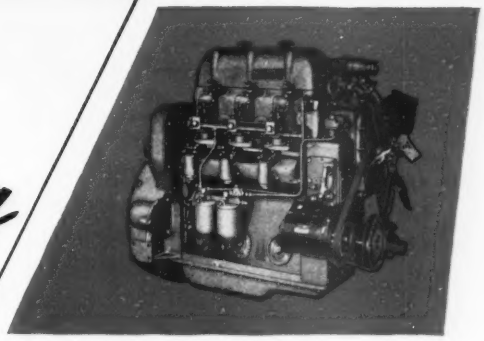

Model 387-C 3 cylinder

Model 687-C 6 cylinder

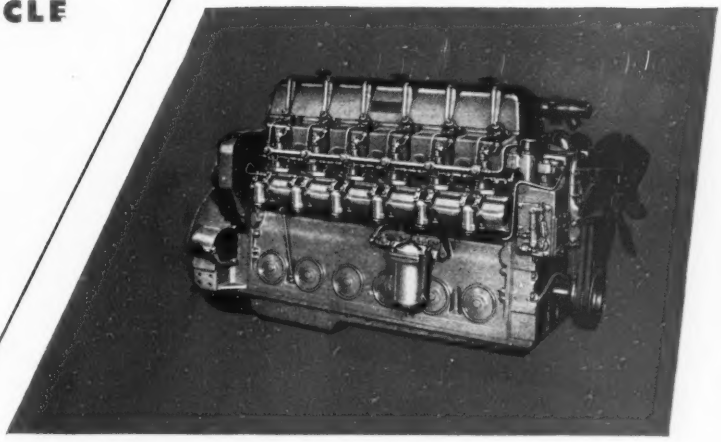

Built for the toughest job known

Now — the new P&H Diesels are ready — after years of intensive research, development and testing in the most grueling of diesel applications — excavator service.

The new P&H Diesels introduce a number of advancements in design — in performance — and in easier servicing — which will be welcomed in many fields of diesel usage, mobile, stationary and marine.

Literature is now available. Address **Harnischfeger Corporation,** Diesel Division, **Port Washington, Wisconsin.**

P&H DIESEL DIVISION HARNISCHFEGER CORPORATION

EXCAVATORS · ELECTRIC CRANES · ARC WELDERS · P&H · HOISTS · WELDING ELECTRODES · MOTORS

let LOCK JOINT solve your water supply problems

Lock Joint's four designs of reinforced concrete pressure pipe answer any problem in the field of large-diameter water supply conduits.

All of these designs may be equipped with Lock Joint's flexible, self-centering Rubber and Steel Joint, which simplifies installation and reduces the initial cost of laying the line.

Lock Joint Reinforced Concrete Pressure Pipe is made in all standard diameters from 16" up, and will withstand any pressure common to American water works practice.

* * *

Your inquiry at any of the Company's offices will receive a prompt reply.

LOCK JOINT PIPE COMPANY

Est. 1905

P. O. Box 269, East Orange, N. J.

PRESSURE PIPE PLANTS

Wharton, N. J., Turner, Kansas

BRANCH OFFICES:

Cheyenne, Wyo. • Denver, Colo. • Kansas City, Mo. • Valley Park, Mo. • Chicago, Ill. • Rock Island, Ill. • Wichita, Kan. Kenilworth, N. J. • Hartford, Conn.

LOCK JOINT
Reinforced Concrete
PRESSURE PIPE

SCOPE OF SERVICES

Lock Joint Pipe Company specializes in the manufacture and installation of Reinforced Concrete Pressure Pipe for Water Supply and Distribution Mains in a wide range of diameters as well as Concrete Pipe of all types for Sanitary Sewers, Storm Drains, Culverts and Subaqueous Lines.

* * *

You Have The Rock

We Have The BIT

Get them together and you will have the formula for greatly reduced drilling costs. It doesn't matter what kind of rock it is; there's a Timken Rock Bit to match and master it—including a carbide insert bit.

What makes the Timken Bit superior for rock drilling? (1) a removable principle that has proved its correctness by more than 14 years service under all rock drilling conditions in mines and construction work. (2) Timken Steel developed especially for Timken Rock Bits and produced in our own steel plant. (3) Timken metallurgical "know how" in heat treatment and hardening. (4) uniform quality and performance; every Timken Bit will give the same outstanding service in speed of penetration and depth drilled when used in the same kind of rock.

No matter where you are there's a Timken Rock Bit distributor within telephone call. Conversion and reconditioning shops also are conveniently located for quick service. Put Timken Bits to work now—cut drilling costs, increase production.

THE TIMKEN ROLLER BEARING COMPANY, CANTON 6, OHIO
CABLE ADDRESS "TIMROSCO"

TIMKEN
TRADE-MARK REG. U. S. PAT. OFF.
ROCK BITS

Reduce Form Damage with NEW VIBER RUBBER TIPPED VIBRATORS

Viber Company has long recognized the destructiveness of steel vibrators on many popular form lining materials.

Realizing that damage to Celotex, plaster of Paris inserts for architectural concrete and plywood is expensive, they studied the possibility of using RUBBER TIPPED VIBRATORS.

After critical tests on many large concrete construction jobs, it was found that the new VIBER RUBBER TIPPED VIBRATORS greatly reduced form costs.



Made of high quality live rubber, Viber's Rubber Tipped Vibrators are built to withstand extreme punishment (the same rubber used to make automobile tires)

New style housing with replaceable rubber tips may be used in place of one-piece steel housing Rubber tips are easily replaced. Simply unscrew worn part and install new tip.

Available in three standard VIBER sizes:

For additional information please write or wire:

VIBER RUBBER TIPPED VIBRATORS MINIMIZE GRINDING AND GREATLY REDUCE FORM FACE DAMAGE AND FORM REPLACEMENT.

VIBER CO. CONCRETE VIBRATORS EST. 1931 Dept. 20 726 South Flower Street · Burbank, California

Manufacturers' Publications

Welded Bridges—Sixteen pages of a reprint offer a review of welded bridges constructed in the United States, Canada and various foreign countries during the last twelve years, and of practices in specifying steel material, details of design and methods of construction. Also included is a review of the results of some German fatigue tests of welded beams, fatigue fractures in girders and stringers of riveted railway bridges and the repairs that are made by welding. Eighteen photographs, two diagrams and four tables augment the article itself.—AIR REDUCTION, 60 EAST 42ND ST., NEW YORK 17, N.Y.

Longer Pump Service—A booklet, "How To Get Longer Service From Your Pumps," contains eight illustrated pages in which four factors that affect pump life and performance are discussed. These are corrosion, corrosion-fatigue, erosion and wear. Definite case histories are cited in connection with exposure to such destructive influences as sewage, brackish harbor water, sour crude petroleum, marine growth, high pressures, and grit as well as combinations of these influences.—THE INTERNATIONAL NICKEL CO., INC., 67 WALL STREET, NEW YORK 5, N.Y.

Runway Light—The construction, performance, and installation of the Westinghouse Type HL High Intensity Runway Light are discussed in an 8-page booklet. This CAA light is suitable for use under diverse weather conditions. It is actually two units in one, a high-tensity light for low-visibility conditions, and a standard elevated runway light for normal visibility conditions.—WESTINGHOUSE ELECTRIC CORP., BOX 868, PITTSBURGH 30, PA.

Cement Gun—A 65-page booklet describes and illustrates many of the uses of the machine made under the trade mark and trade name "Cement Gun," and its sand-cement product, "Gunite."—CEMENT GUN CO., ALLENTOWN, PA.

Wood Decay—"Protecting Your Investment in Wood," is a brochure explaining how and why wood decay occurs, and showing methods of treatment to prevent such loss.—CHAPMAN CHEMICAL CO., DERMON BUILDING, MEMPHIS 3, TENN.

DON'T OVERLOOK SAVINGS in pipeline construction costs to reduce cost of delivered water

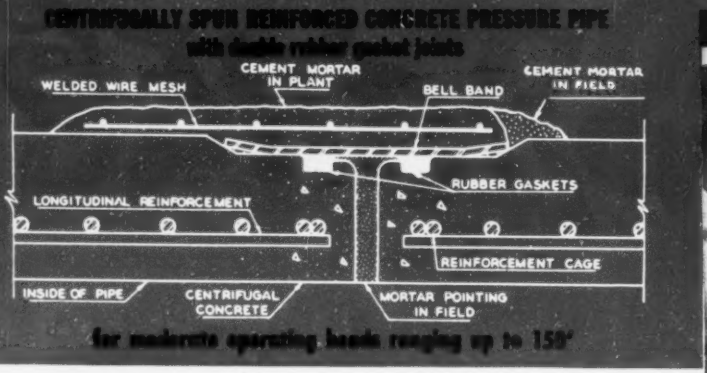

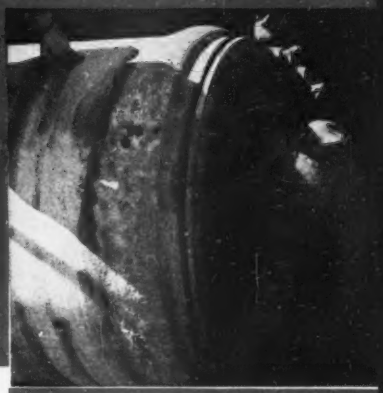

Installing rubber gasket in groove on spigot end of pipe.

(Above) Joint sections ready to slip into place — as a cork fits in a bottle.

(Below) Pouring soupy mortar into outside annular space — tar paper confines mortar to joint area. Inside space is pointed by hand in pipe 24" and larger, or "buttered" and swabbed in pipe under 24" diameter.

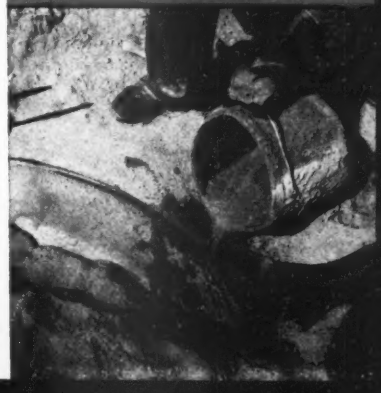

These savings are important to everyone concerned with main water supply line design, construction and operation:

1. **To Design Engineers** who want a watertight closure simple in design, rugged in construction, flexible and positive in service. Straight steel joint sleeves permit some pulling of joints to allow for minor changes in alignment or grade, while angle sleeves may be used to provide for larger deflections. This unique joint is also adaptable for connecting to fabricated elbows, reducers and other fittings.

2. **To Contractors** who desire ease and speed of installation. Steel joint sleeve is fitted in the plant to one end of each section of pipe — in effect a bell and spigot rubber gasket joint. 12 ft. sections facilitate laying. There's no need to dig bell-holes, no circumferential welding, no laborious and costly caulking. Immediate back-filling is recommended — an important cost-saving factor in itself.

3. **To Owners, Water Users and Taxpayers** who desire maximum economies in cost of delivered water. Low first costs, plus the proven advantages of performance, sustained carrying capacity and freedom from maintenance expense assure substantial savings.

This type of centrifugally spun reinforced concrete pressure pipe is helping to make substantial savings in construction costs on Unit 5, Coachella Valley Distribution System, a U. S. Bureau of Reclamation project. Information and specifications regarding this class of pipe are available on request.

American PIPE AND CONSTRUCTION CO.

Concrete Pipe for Main Water Supply Lines, Storm and Sanitary Sewers, Subaqueous Pipe Lines.

P. O. Box 3428, Terminal Annex • Los Angeles 54, California

QUALITY PIPE LINE PRODUCTS MANUFACTURED AND INSTALLED BY AMERICAN INCLUDE HUME CENTRIFUGAL CONCRETE PRESSURE PIPE, AMERICAN CONCRETE CYLINDER PIPE, PRESTRESSED LOCK JOINT CONCRETE CYLINDER PIPE, LOCK JOINT CONCRETE CYLINDER PIPE.

Main Offices and Plant — 4635 Firestone Boulevard, South Gate, California
District Offices and Plants — Oakland — San Diego — Portland, Oregon

HD-19 TORQUE

OUTPUSHES

. . . On Any Job, Any Time

***Shortens* Time in Cut.** You get heaping loads fast with the BIG HD-19 pushing. A powerful, 40,000 lb. tractor with long, wide, sure-gripping tracks . . . it gets in there and really "bears down."

What's more — makes contact faster with any make or type scraper combination — no trundling along behind trying to catch up. Hangs on, too, throughout entire loading period — no losing scraper, no sudden, jarring contacts because there's no stopping to shift. Torque Converter automatically synchronizes HD-19's speed with speed of loading unit. And with a final, extra boost, gets scraper off to fill with a flying start. Result — MORE YARDS MOVED AT LESS COST PER YARD.



NEW HEAVY-DUTY, ADJUSTABLE PUSHER PLATE NOW AVAILABLE FOR HD-19. It's bigger, stronger, heavier — weighs 1,600 lbs. It's adjustable — operates at 16" or 22" above ground . . . pushes any make scraper or self-powered hauling unit.

CONVERTER TRACTOR

OUT-'DOZES

Of Year, Under Any Conditions

Shortens **Time on Every Bulldozing Job.** The heavier, sure-footed, better-balanced HD-19, working with especially matched bulldozers — plus having the advantages of the Torque Converter drive — assures greater output on bulldozing. Operator can take a deeper cut, roll bigger loads faster . . . and get back for the next pass quicker — has a high reverse of 5.5 m.p.h. Load and terrain and use of throttle govern forward speed . . . and there's no worrying about engine stalling when tractor is overloaded — keeps running, regardless.

And because the HD-19 is on tracks it can be used everywhere on the job — on wet, sandy or rocky going . . . no job too tough for it to handle. "Seeing is believing" . . . watch it outperform. Contact your Allis-Chalmers dealer.

ALLIS-CHALMERS

TRACTOR DIVISION • MILWAUKEE 1, U. S. A.

ORIGINATOR OF THE TORQUE CONVERTER TRACTOR

THEY Roll-Along ON ROGERS TRAILERS

MORE AND BIGGER LOADS
Everyday - Everywhere

An impressive number of the biggest contractors TODAY repeatedly put their confidence in ROGERS TRAILERS long proven ability to "deliver the goods" and "stand the gaff" over long periods of heavy usage.

Smaller operators, too, find in the extensive ROGERS LINE, the answer to their particular trailer requirements with proper capacity, road clearance, type of construction and strength with lightness.

We solicit inquiries which make your trailer problems our problems and we generally come up with the correct answer.



ROGERS BROS. CORP.
DESIGNERS and BUILDERS OF HEAVY DUTY TRAILERS SINCE 1915
EXPERIENCE builds 'em PERFORMANCE sells 'em
135 ORCHARD ST. ALBION, PENNA.

Manufacturers' Activities

Sales—Geo. G. Raymond, Jr., sales manager of LYON-RAYMOND CORP., Greene, N. Y., has been elected vice-president of the board of directors . . . A reorganization of the field supervision of the mechanical goods sales division of GOODYEAR TIRE & RUBBER CO. has been announced. Eastern sales division will be in charge of O. A. Schilling; central, H. E. Langdon; southern, R. B. Warren; western, R. G. Abbott. M. W. Sledge is assistant manager of the belting sales department . . . Bruce A. Dean is general sales manager of the Plywood division of the MENGEL CO., Louisville, Ky. . . . Edward B. Hill is now vice-president in charge of sales for GAR WOOD INDUSTRIES, INC., Wayne, Mich. . . . Geo. Wacker goes to Oakland, Calif., as assistant to the western sales manager of R. G. LE TOURNEAU, INC.; Geo. Goettsche is sales representative for the new factory branch of LE TOURNEAU at Oakland; A. W. Travis is district sales representative at Portland, Ore., for Oregon, Washington, British Columbia, and Alaska; L. D. Le Tourneau, brother of President, R. G. Le Tourneau, is logging specialist in the Northwest; Geo. C. Summers is district sales representative at Columbus, Ohio, for Kentucky, Ohio, Michigan, Ontario and Quebec. Four department heads—R. P. Nichols, D. K. Heiple, E. E. Weyeneth and H. R. McQuarrie—recently flew in a company owned Lockheed Lodestar to 18 cities on a 10,000-mile air hop to visit 48 heavy equipment distributors in the U. S. and Canada. . . . Harold T. Chester has been appointed tramway sales engineer of AMERICAN STEEL & WIRE CO., succeeding Wm. C. Kuhn, retired. . . . Levi W. Reeves is assistant sales manager of the Memphis, Tenn., office of the TENNESSEE COAL, IRON & R. R. CO. . . . J. E. Poole is general sales manager of the KEYSTONE ASPHALT PRODUCTS CO.

Fred Zimmerman is now director of sales, and J. J. Sieber sales manager of BRODERICK & BASCOM ROPE CO., St. Louis, Mo. . . . BINKS MFG. CO., Chicago, has appointed H. J. Fink to direct sales and service in Colorado, Kansas, Nebraska, Wyoming, Montana and New Mexico from Longmont, Colo.; C. J. Rood is manager of the Branch in Indianapolis, Ind.; M. B. Scully at Princeton, Ill., for Iowa and northern Illinois; E. J. Cremer at St. Louis for Missouri and

(Continued on page 105)

Continuous Research and Development at Amcreco

means longer life and less maintenance

Amcreco
Lowry Process
Creosoted Products

Timbers • Piles • Planking
Framed Bridge Timbers
Adzed and Bored Cross Ties • Bridge Ties
Poles • Cross Arms • Conduit

The ever-increasing life expectancy of Amcreco Creosoted Products is no accident. It is the direct result of continuing research and development at Amcreco. With the tried and proven Lowry pressure creosoting process as the foundation, refinements and improvements in treatment techniques have in many instances doubled and even tripled service life in the space of the last 25 years.

Backed by this progressive program Amcreco Creosoted Products are your best assurance of long life and minimum maintenance. For greater all-around economy on your next job, specify Amcreco.

Pressure-treated for strength that lasts!

AMERICAN CREOSOTING COMPANY
INCORPORATED
COLONIAL CREOSOTING COMPANY INCORPORATED
AMCREFCO
GEORGIA CREOSOTING COMPANY INCORPORATED
LOUISVILLE, KENTUCKY

New

UNIT 1520

Self-Propelled

RUBBER-TIRED CRANE

15 TON CAPACITY

This 50,000 pound Mobile Crane is a completely new member of the UNIT Crane and Shovel line. Designed for both "on and off" highway operation. So compact, it works efficiently even in small, cramped quarters, "in or out" of the yard.

- Rugged . . . Perfectly Balanced
- Hook Roller Construction
- Controlled and Operated by ONE Man
- Powered by ONE Engine
- Hydraulic Steering . . . Air Brakes and 4 Speed Air-Actuated Transmission
- Heavy Duty, yet operated with remarkable SPEED . . . SAFETY . . . ACCURACY . . . ECONOMY!

UNIT CRANE & SHOVEL CORP.
4315 W. BURNHAM STREET
MILWAUKEE 14, WISCONSIN, U. S. A.

COMPLETELY CONVERTIBLE . . .

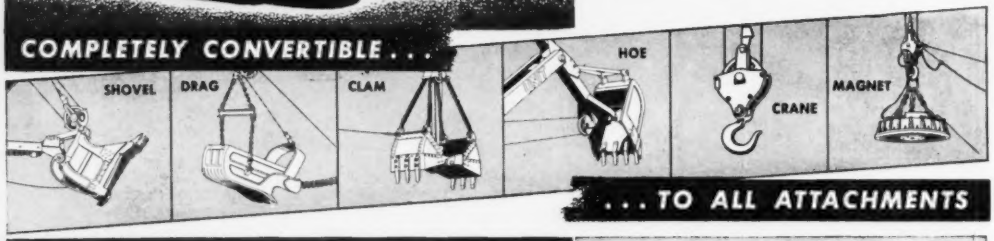

. . . TO ALL ATTACHMENTS

REMOVABLE BUMPERS

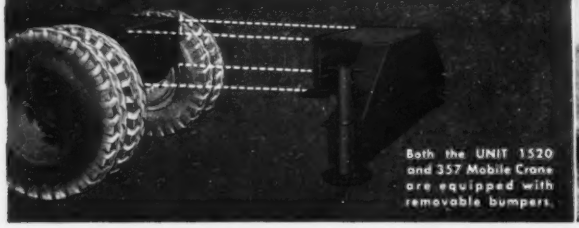

Both the UNIT 1520 and 357 Mobile Crane are equipped with removable bumpers.

Greater digging efficiency is attained in excavating by removal of one bumper. Permits additional space to lower boom, thus increasing digging depth in trenching or other excavating jobs. Provides close-range operation on shovel work. Bumper is bolted to undercarriage frame and its removal is a simple operation.

UNIT 357 MOBILE CRANE

WITH SHOVEL ATTACHMENT
• Self-Propelled • Rides on Rubber • Has Total Uses.

SHOVELS • DRAGLINES • CLAMSHELLS • CRANES • TRENCHOES • MAGNETS

POWER

You can't beat EXIDE BATTERIES for dependable Diesel cranking

For peak performance, use Exide Diesel Cranking Batteries! They're built specially for the job . . . with mighty power to handle the toughest cranking . . . with extra ruggedness for hard service in all climates . . . and in types and sizes for on and off the highway automotive equipment of every kind.

Manufacturers, owners and operators of Diesel powered trucks, tractors, and earth-moving units can always count on Exide Batteries for dependable performance, long battery life and low cost maintenance.

Exide
BATTERIES

1888 . . . Dependable Batteries for 61 Years . . . 1949

"Exide" *Reg. Trade-Mark U. S. Pat. Off.*

THE ELECTRIC STORAGE BATTERY COMPANY, Philadelphia 32 • *Exide Batteries of Canada, Limited, Toronto*

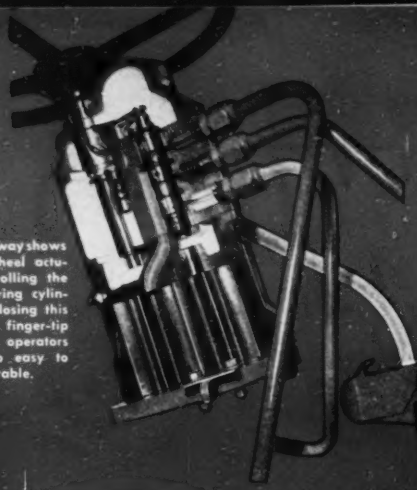

This Hydro-Steer cut-away shows how the steering wheel actuates the valve controlling the oil flow to the steering cylinders. Opening and closing this valve requires only finger-tip pressure. That's why operators find the Heiliner so easy to handle, so maneuverable.

The Heiliner is furnished with either a 16.5-cu. yd. scraper or 18-cu. yd. bottom-dump wagon. The two units are interchangeable.

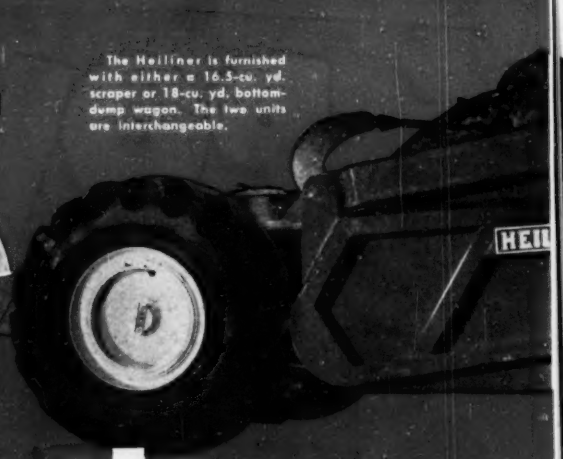

Heiliner

Take a good look at this husky heavy-duty hitch. Its swivel-type design permits complete freedom of movement between the 2-wheel tractor and scraper. Note also the powerful hydraulic steering pistons. The pistons and sturdy hitch work as a team, preventing nosing, snaking, or jackknifing. Over-steering is eliminated through the use of positive mechanical stops.

This phantom view illustrates the Heiliner's steering system. At the front is the pump which supplies oil at all times. The oil is metered by the Hydro-Steer mechanism to the two opposed, double-acting, direct-connected hydraulic steering cylinders. Steering is safe, positive, and effortless.

From the operator's point of view, there's nothing that compares with the Hydro-Steer. It lets him turn the 39-foot Heiliner in a 22-ft. radius. And, he can do it with one hand. Such easy maneuverability means more round trips, more dirt moved, lower costs.

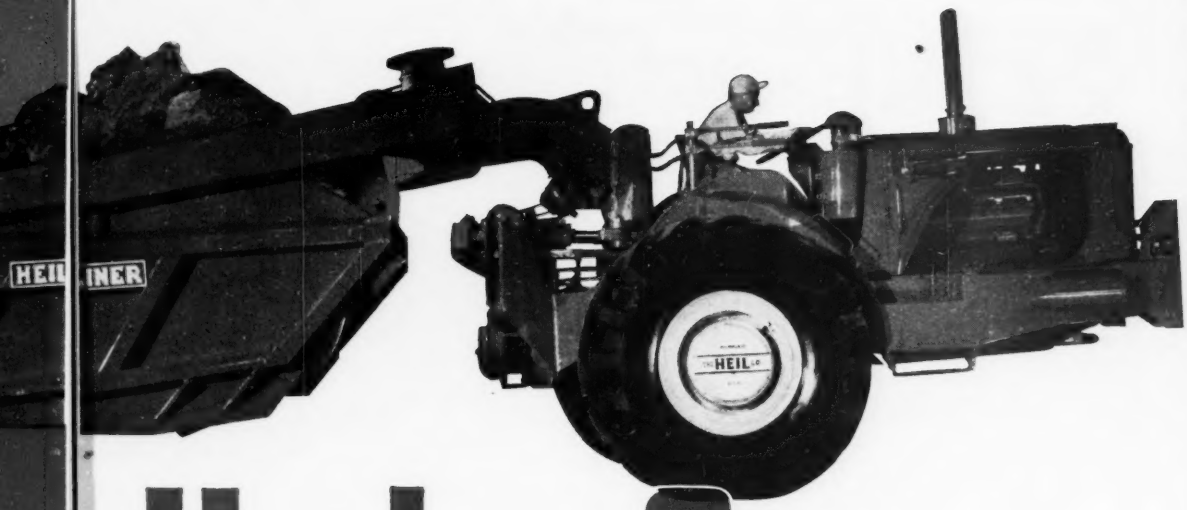

Hydro-Steer

the right steer to larger earthmoving profits

1. Because the Heiliner's patented hydraulic pump delivers a constant volume of oil, regardless of engine rpm -- for safe, positive steering at all times.

2. Because your operator can handle a fully loaded Heiliner (wt. 45 tons) with passenger-car ease, maneuver quickly for faster cycles, move more dirt.

These and many other Heiliner features help you make larger earthmoving profits. Get the full story on the Heiliner and Heil's complete line of earthmoving equipment. Check the coupon and mail it today.

HEIL

THE HEIL CO., Dept. 149, 3001 W. Montana Street, Milwaukee 1, Wisconsin

Please send me complete information on the items I have checked below:

- ☐ **Heiliner**—2-wheel prime mover
- ☐ **Heil Scrapers**—tractor-drawn
- ☐ **Heil Hydraulic Dozers**—specify make of tractor
- ☐ **Heil Cable Dozers**—specify make of tractor
- ☐ **Heil Power Control Units**
- ☐ **Heil Light-Duty Dump Bodies**—specify make of truck
- ☐ **Heil Heavy-Duty Dump Bodies**—specify make of truck
- ☐ **Heil Platform Conversion Hoists**

Name ..... Title .....

Company .....

Address .....

City ..... ( ) State .....

PROOF - *not Guesswork*

Makes FWD America's Foremost Heavy-Duty Truck

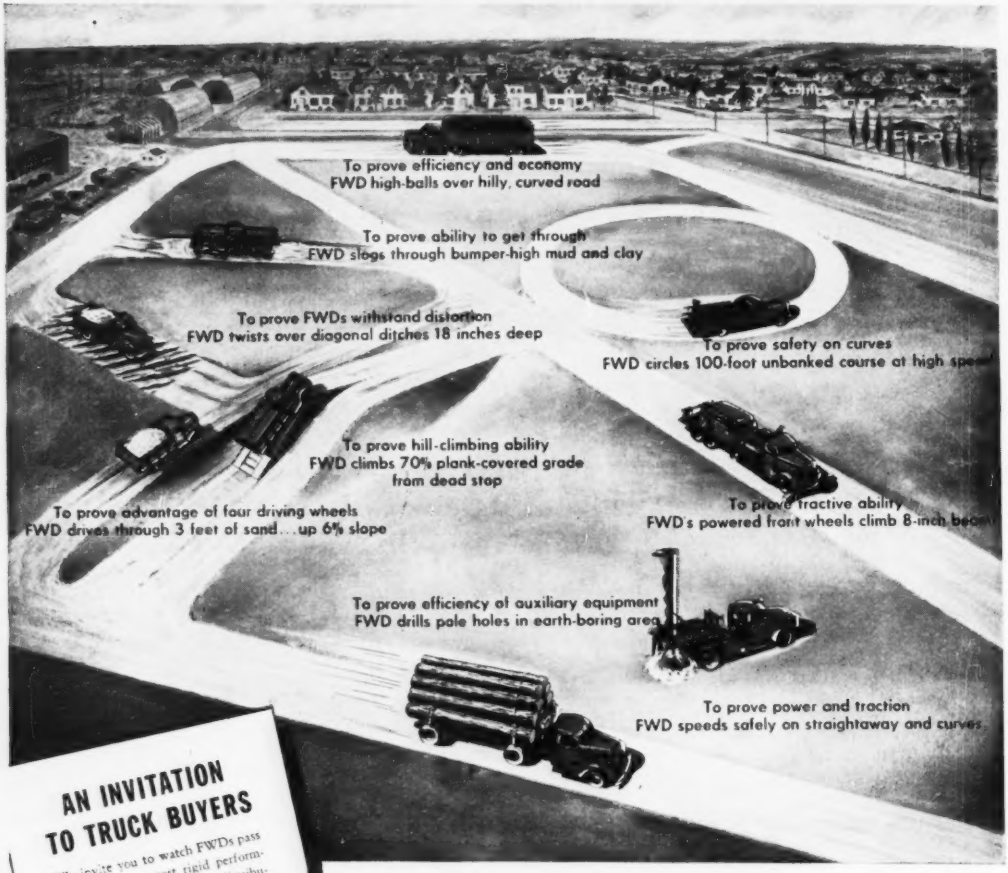
To prove efficiency and economy
FWD high-balls over hilly, curved road
To prove ability to get through
FWD slogs through bumper-high mud and clay
To prove FWDs withstand distortion
FWD twists over diagonal ditches 18 inches deep
To prove safety on curves
FWD circles 100-foot unbanked course at high speed
To prove hill-climbing ability
FWD climbs 70% plank-covered grade
from dead stop
To prove advantage of four driving wheels
FWD drives through 3 feet of sand...up 6% slope
To prove tractive ability
FWD's powered front wheels climb 8-inch beam
To prove efficiency of auxiliary equipment
FWD drills pole holes in earth-boring area
To prove power and traction
FWD speeds safely on straightaway and curves

AN INVITATION TO TRUCK BUYERS

We invite you to watch FWDs pass a series of the most rigid performance tests. Ask your FWD distributor to arrange for you to visit our plant. Or — if you can't get away, ask him to show you the movie, *The FWD Story*. In either case, you will see for yourself how FWD trucks can help solve your heavy-duty trucking problems.

Walter A. Olen
President
The Four Wheel Drive Auto Co.

YOU want to know that your truck can climb steep grades . . . drive through deep snow, mud or sand . . . get you through to off-the-road locations. You want to know it can speed heavy loads safely over slippery highways . . . that it can get you around sharp curves without skidding. You want to know your truck has the stamina to insure long life . . . that it will do it without expensive mechanical breakdowns.

You can be sure it will if it's an FWD! What's more, with FWDs, you can be sure of these advantages — *even before you buy.* And here's why. On FWD's proving ground, you get proof — *not guesswork* — of what an FWD will do for you. A series of scientifically designed torture tests duplicates every operating condition you're liable to meet. Yes . . . FWDs prove themselves thoroughly.

Find out what this can mean to you. See your FWD distributor — or write direct for complete facts about FWD Trucks.

THE FOUR WHEEL DRIVE AUTO COMPANY
Clintonville, Wisconsin
Canadian Factory: Kitchener, Ontario
FOUR AND SIX WHEEL DRIVE TRUCKS

America's Foremost Heavy-Duty Truck

southern Illinois; B. R. Futon, Cleveland, Ohio, for Ohio; J. J. Lynch, Springfield and Boston, Mass., for New England and greater Boston area; and H. J. Dueno at Milwaukee, Wis., for Wisconsin, peninsular Michigan, Minnesota, and North and South Dakota . . . W. M. Holland is in charge of engine sales for INDUSTRIAL POWER division of INTERNATIONAL HARVESTER Co., I. P. Payne is assistant division sales manager, H. R. Carlson is southwest region manager . . . W. H. Hammond has been elected vice-president, sales, of MARION METAL PRODUCTS Co., Marion, Ohio.

Distributors—A. B. JUDD SUPPLY Co., Houston, Tex., is now a distributor for TUBE-TURN welding fittings and flanges . . . New distributors for PENN DRAKE petroleum and specialty products in the Cleveland area are the BLUMEL IGNITION Co., 14,201 Euclid Ave., East Cleveland; Maley & Mellert Co., 3,601 Carnegie Ave., Cleveland; and MOTOR TRUCK EQUIPMENT Co., 12,000 Harvard Ave., Cleveland . . . New distributors for the OSGOOD Co. and THE GENERAL EXCAVATOR Co., Marion, Ohio, are CONTRACTOR'S SERVICE, INC., 317 W. Worthington Ave., Charlotte, N. C.; DULANEY SERVICE Co., Box 96, San Antonio 4, Tex.; and the MANNING EQUIPMENT Co., 17,560 Chicago Ave., Lansing, Ill. . . . COLONIAL ELECTRIC PRODUCTS, INC. of East Paterson, N. J., has appointed COLONIAL SALES DISTRIBUTORS of Rochester, N. Y., as regional factory distributor for cold cathode fixtures and 15,000-hour lamps.

Personalities—Jack B. Bond has been appointed district manager of the central territory for the crusher and process machinery division of the NORDBERG MFG. Co., Milwaukee, Wis. . . . Melvin C. Harris has resigned as vice-president in charge of production of ALLEGHENY LUDLUM STEEL CORP., C. B. Pollock is now in charge of production . . . Alfred I. Stuart is head of the methods engineering department of the HYSTER Co., Portland, Ore. . . . Joe Lavery, formerly with LONE STAR CEMENT Co., in Charlotte, N. C., has joined the STATE MACHINERY & SUPPLY Co., INC., of Columbia, S. C., to cover southeastern South Carolina. . . . Walter F. Spoerl is general sales manager, under supervision of Vice-president E. G. Brown, for all divisions of the U. S. RUBBER Co. Robert D. Gartrell is development manager for all divisions. Wesley A. Armstrong is production manager . . . Vincent Vandervoort has been elected vice-president of MARLOW PUMPS, Ridgewood, N. J. . . . The ASPHALT INSTI-

(Continued on page 108)

PAT. NO. 2, 297,928

A Complete Unit for a Complete job

You're always *sure* you're getting the very best in efficient, economical packaged air conditioning when you specify Governair—the original patented design!

This complete unit is easy to install—requires only simple electrical, water and duct connections. Built-in Evaporative Condenser keeps water usage down to a minimum. Governair engineering assures correct co-ordination and balance of all functions. Generously proportioned heat transfer surfaces provide maximum performance and economy.

Choose Governair completely packaged air conditioners and you'll *always* do your best!

Originators of Completely Packaged Air Conditioners

GOVERNAIR

ARCHITECTS, ENGINEERS, CONTRACTORS

Would you like to know how Air Conditioning jobs can be installed for from $100.00 to $400.00 per ton less?

Write Dept. H

GOVERNAIR CORPORATION
513 N. Blackwelder
Oklahoma City, Okla.

DRILLING CONTRACTORS

DIAMOND AND SHOT CORE BORINGS — DRY SAMPLE BORINGS

Foundation Testing for Bridges, Dams and all Heavy Structures

Also

Manufacturers of Diamond and Shot Core Drills, Accessories and Equipment

SPRAGUE & HENWOOD, Inc.
Scranton, Pa. Dept. E, U. S. A.

GUNITE

PNEUMATICALLY PLACED CONCRETE
DENSE · DURABLE · HIGH STRENGTH

for

Restoring Disintegrated Concrete
Dam, Dock and Bridge Repairs
Steel Encasement and Fireproofing
Sewer, Water Pipe and Penstock Linings
Stack and Bunker Linings
Wood Pile Casings—Pressure Grouting
Prestressed Tanks and Silos

Get in touch with us for engineering data and estimates

GUNITE CONSTRUCTION CORPORATION
420 LEXINGTON AVE., NEW YORK 17, N.Y.
MUrray Hill 3-7699

TELSMITH

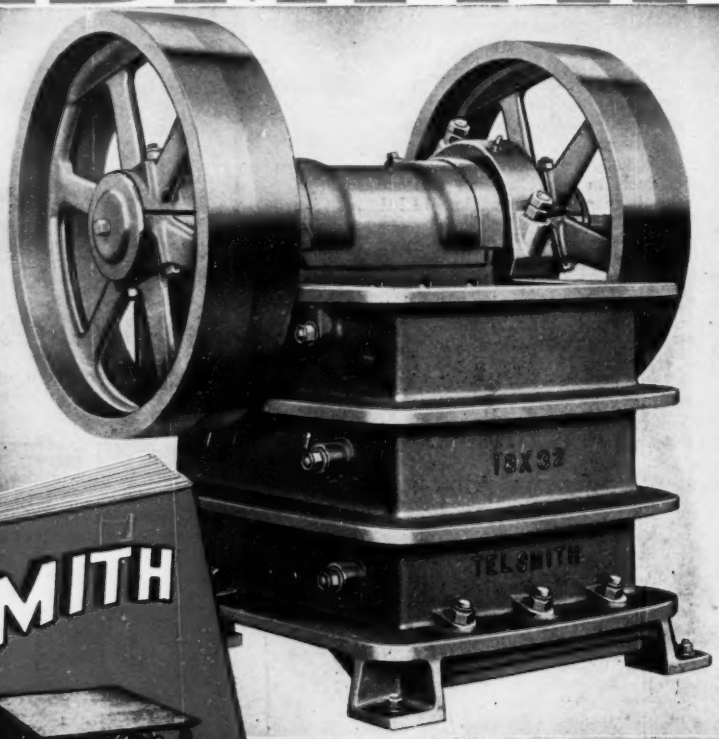

JAW CRUSHERS

TELSMITH

Primary Crushers

Jaw Crushers: Sizes: 10 x 16 in. to 30 x 42 in., 22 to 240 tons per hr. capacity.

Gyratory Breakers: Sizes: 6B to 25B, 26 to 400 tons per hr.

Secondary Crushers

Gyrasphere: Sizes: 24 to 48 in., 15 to 210 tons per hr. ***Intercone:*** Sizes: 18 to 28 in., 26 to 68 tons per hr. ***Double Roll:*** Sizes: 24 x 16 in. to 40 x 22 in., 75 to 132 tons per hr.

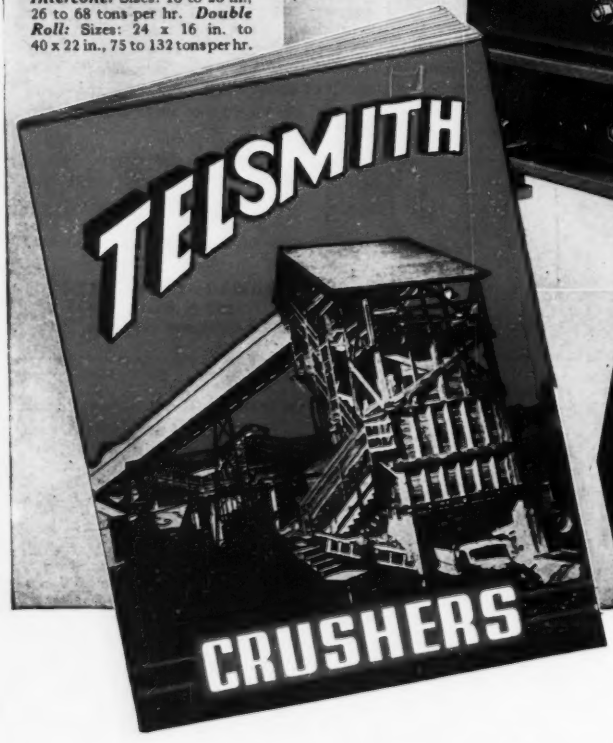

NEW 40-PAGE CRUSHER GUIDE

to profitable operation . . . together with descriptive Bulletin on Telsmith's latest crushing development—the new Intercone Crusher . . .

FREE ON REQUEST

CS-6

CRUSHERS

for
BETTER PRODUCT • BIGGER CAPACITY
LOWER COST

• What do you want to crush? What size product do you want to make? Coarse . . . fine . . . intermediate . . . or a wide range of sizes? Telsmith Crushers can do it for you—most *dependably*. You can be *sure* that Telsmiths will be right for your particular job *always*. Because Telsmith builds crushers of *all types*. And Telsmith engineers have no reason whatever to be prejudiced for or against any one type of crusher. Consult Telsmith Engineers . . . get their unbiased crusher recommendations for your plant. Find out how the latest features in modern crusher design give you top tonnage, exceptional product quality, low cost . . . get new crusher catalogs C-2 and I-2.



GYRASPHERE CRUSHERS



GYRATORY BREAKERS

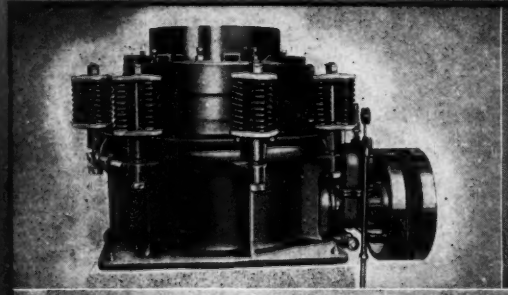

INTERCONE CRUSHERS

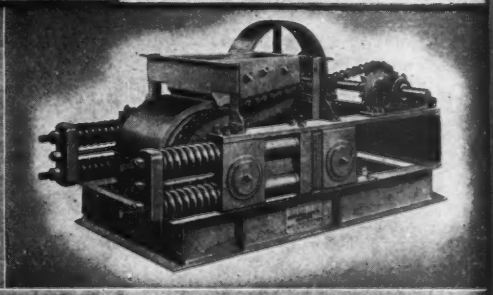

DOUBLE ROLL CRUSHERS

SMITH ENGINEERING WORKS, 500 EAST CAPITOL DRIVE, MILWAUKEE 12, WISCONSIN

Cable Address: Sengworks, Milwaukee

51 East 42nd St. New York 17, N. Y. • 211 W. Wacker Drive Chicago 6, Ill. • 713 Commercial Trust Bldg. Philadelphia 2, Pa. • 238 Main Street Cambridge 42, Mass. • Boshek Eqpt. Co. Milwaukee 3, Wis. • Henry M. Wood Co. Cincinnati 6, Ohio

Clyde Eqpt. Co., Portland 9, Ore., & Seattle 4, Wash. • General Machinery Co., Spokane 1, Wash. • Brandeis Machinery & Supply Co., Louisville 8, Ky. • Rish Eqpt. Co., Charleston 22, & Clarksburg, W. Va.—Roanoke 7, & Richmond 19, Va. • Wilson-Weesner-Wilkinson Co., Knoxville 8, & Nashville 6, Tenn.

SIMPLEX

TYPE MS METER

Meets Highest Standards for Accuracy and Sensitivity!

Note these important features:

- Bell shaped float translates the half power of the differential into uniform graduations of dial and chart.
- Evenly spaced charts . . . easily read at high as well as low rates.
- Continuous type integrator — eliminates intermittent movement.
- High accuracy of flow readings—over long ranges—10 to 1 or 7.6 to 1.
- Wall panel or floor mounting—electric or spring wound clock optional.
- Rugged construction—simplified design that permits servicing by plant personnel.

Write for full information to

The Simplex Valve & Meter Company, Dept. 4, 6751 Upland Street, Philadelphia 42, Pa.

SIMPLEX

VALVE AND METER COMPANY

TUTE has established an office at Atlanta, Ga., and appointed Wm. H. Meth, district engineer . . . Ralph G. Caonette has been appointed general manager of the PITTSBURGH EQUITABLE METER division of ROCKWELL MFG. CO. . . . H. F. Wardwell is chairman of the board of DETROIT STEEL PRODUCTS CO., and W. C. Owen is now president. Wm. Gillett and E. C. Hodges were elected vice-presidents . . . William F. Foster has been appointed general manager of EVANS, COLEMAN & EVANS, LTD., building supply dealers and quarry operators of Vancouver, B. C., according to announcement of E. Roland Gilley, vice-president and managing director.

Deceased—Chas. H. Longfield, 56, vice-president of the YOUNGSTOWN SHEET and TUBE CO., Youngstown, Ohio, died in Clearwater, Fla., March 7 . . . Walter R. Howell, 60, president of the BLISS AND LAUGHLIN STEEL CO., Harvey, Ill., died in Chicago, March 14 . . . Walden W. Paape, 48, domestic sales manager of EUCLID ROAD MACHINERY CO. died March 18 in Cleveland, Ohio . . . Roy R. Summerville, assistant director of the Birmingham, Ala., plant of the SOUTHERN STATES IRON ROOFING CO., died March 7 . . . David P. Hopkins, associated with the U. S. PIPE & FOUNDRY CO., Burlington, N. J., and one of its predecessor companies for 54 years, died recently. He had retired in 1943 as vice-president in charge of operations and a director . . . Elmore H. Schiemann, 48, engineer with PIONEER SERVICE & ENGINEERING CO., Chicago, for many years, died Feb. 11 . . . John M. Jerpe, 58, director of the suggestion plan organization for GENERAL MOTORS, died at Indianapolis, Ind., March 10.

Miscellany—A 10 to 15-percent reduction in the price of corkboard has been announced by ARMSTRONG CORK CO., Lancaster, Pa. . . . TIMBER STRUCTURES, INC., of Portland, Ore., has moved its Seattle division office and warehouse to 2601 So. 98th St. . . . As a result of his recent 12,000-mile tour of the East and Midwest, Newman L. Smith, president of AIR-QUIPMENT AND AEROL CO., INC., of Burbank, Calif., has announced a change in the method by which the companies' ground handling and materials handling equipment will be distributed. Seven market centers are being set up to give dealers in all areas 24-hour service on orders. Regional offices and warehouses have already been established in New York, Chicago and Cleveland. Four other cities will be added soon. . . . AVERY PRODUCTS CO. has been formed by three

(Continued on page 113)

PROFITS *are greater on* **MECHANIZED PAVING JOBS!**

Start your savings with

BLAW-KNOX
CLAMSHELL BUCKETS

HERE'S how to make more money on each paving job by using Blaw-Knox "assembly line" equipment . . . first, start increasing your savings with Blaw-Knox Clamshell Buckets . . . then continue to make more money by *saving* it through 100% mechanization of every operation. Use Blaw-Knox equipment right down the line, from rehandling material to finished pavement. Blaw-Knox supplies *everything you need* for high speed, low cost concrete and black top paving or concrete construction.

And remember, when your job starts with Clamshell Buckets, whether it is rehandling, trenching, dredging or hard digging, it will pay you to use the best bucket available . . . the one that brings you the greatest return on your crane investment. Be sure to select the *right* bucket for the job . . . check *crane capacity, clearances, type of material* to be handled or work to be done . . . then choose the *type, size* and *weight* of bucket that will pay off in maximum yardage, easier, faster work and reduced over-all maintenance costs.

Blaw-Knox can best give you the engineering service that makes correct bucket selection simple, and offers you the one-source—one-responsibility mechanized equipment that makes possible greater profit on every job. See your nearest Blaw-Knox distributor, or write direct for literature.

PORTABLE AGGREGATE BATCHING PLANTS

PORTABLE BULK CEMENT PLANTS

TRUCK MIXER LOADING PLANTS

PRECISION SUBGRADERS

CONCRETE BUCKETS

ADNUN BLACK TOP PAVERS

STEEL STREET FORMS



TRUCK MIXERS

BLAW-KNOX

BLAW-KNOX DIVISION OF BLAW-KNOX CO., Farmers Bank Bldg., Pittsburgh 22, Pa.

New York • Chicago • Philadelphia • Birmingham • Washington



New "C" TOURNAPULLS

In Illinois

Sager Construction Company used two of these new electric-control Tournapulls to move 125,000 yards of earth on the Jacksonville Airport. Working in loamy top soil and clay on a 1600' one-way haul, each machine maintained an average of 11 loads an hour. Says job superintendent Steinhoff, "They make 2 trips to a crawler tractor's one". Sager Construction Company have ordered 2 additional C Tournapulls.

In Minnesota

McLean-Astleford Company put into production three of the high-speed (17.5 m.p.h.) Tournapulls on a 45-day contract to move 40,000 yards of sand for an addition to Ft. Snelling National Cemetery. The new Tournapulls completed a 2800' round trip cycle every 4½ minutes. Big 21.00 x 25 ground-gripping tires helped units travel through the deep, loose sand and permitted them to cross pavements safely without need of planking. McLean-Astleford moved 75% of their total yardage in the first 8 days!

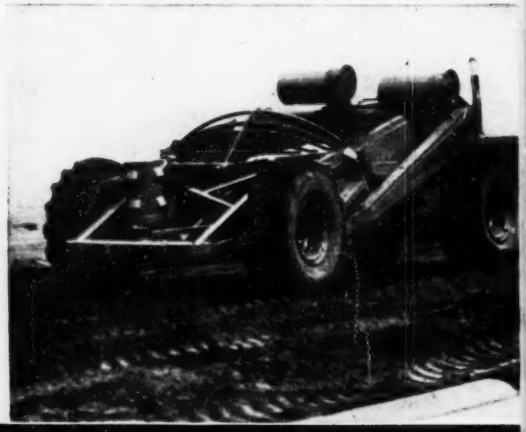

LETOURNEAU PEORIA, ILLINOIS — HIGH-SPEED RUBBER-TIRED **TOURNAPULLS**

MORE YARDS PER HOUR WITH RUBBER-TIRED POWER

prove SPEED PAYS on any haul

In Tennessee

B. G. Young & Sons brought two of the new C Tournapulls to the Greeneville Airport, helped move 130,000 yards on 30-day schedule. On 700' one-way hauls over 6% grades, these units each averaged 15 trips per hour with average pay load of 10 cubic yards. Finger-tip electric controls and instantaneous gear selection for constant power were especially important in getting this high production on short hauls. Giant 21.00 x 25 tires helped compact material, permitted haul over runways and over paved areas.

In Wisconsin

John O'Keefe used 2 of the new rubber-tired C Tournapulls with 3 of the earlier Super C Tournapulls to help speed completion of a Mississippi bridge approach on U. S. Highway 12 near Hudson. These fast-moving new C's loaded 11 pay yards of the loose blow sand in 75', averaged 10 trips per hour on a difficult 5000' cycle to average 110 pay yards per hour. The power steering and big air-controlled disc brakes permitted full use of high speed on steep haul grades (up to 12%). "Beat anything built", said Bob O'Keefe.

In Ohio

Kent Brothers have used two new C Tournapulls for road construction since spring of '48. After finishing a job at Laurelville, they drove 84 miles in 5 hours to a new job at Renrock. There they handled a 10,000-yard bridge approach on Highway 76. They then drove to a relocation of 78, between McConnelsville and Caldwell where they moved 70,463 yards of sandy loam, clay and soapstone shale over average 2000' hauls. Through the entire season, wet weather never shut them down. "Incomparable", commented Paul F. Kent, owner.

These are just a few of many job reports available, showing the new lowest-net-cost-per-yard available with LeTourneau electric-control Tournapulls. Would you like to see others? If so, contact your nearest LeTourneau Distributor . . . or send coupon for extra copies available.

Mail Today

R. G. LeTOURNEAU, Inc., Peoria, Ill.

☐ Please send us extra copies of Tournapull job performance reports on.....haul length.

☐ Also send illustrated catalog explaining performance features of revolutionary "C" Tournapull.

NAME.....

COMPANY.....TITLE.....

ADDRESS.....

CITY.....STATE.....

Type and quantity of dirtmoving involved.....

Tournapull—Trademark Reg. U. S. Pat. Off. EX59-w

Fabricators and Erectors of *Structural Steel*

• Statistics show the steel industry has facilities to fabricate and erect over two million tons of steel in 1949. America finds Allied ready with *three* fully equipped plants, operating under unified control, with abundant capacity to tackle a big share of the job. Here expert crews fabricate and erect bridges and buildings from the blueprint stage to finished structures. We invite you to consult Allied on any structural job that's pending . . . large or small. Send us your specifications for estimates.

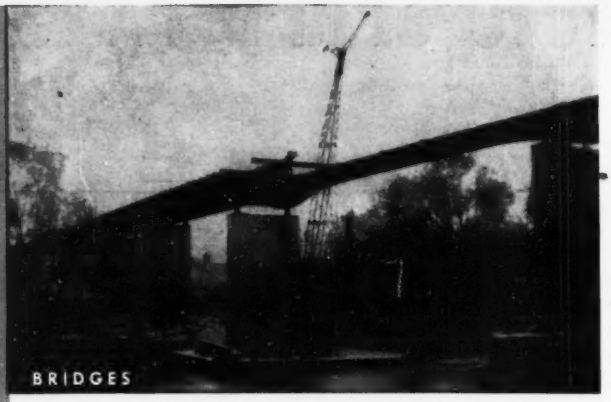

Allied engineers adapt methods to the job, often employing water erection with floating equipment to shorten bridge-building hours.

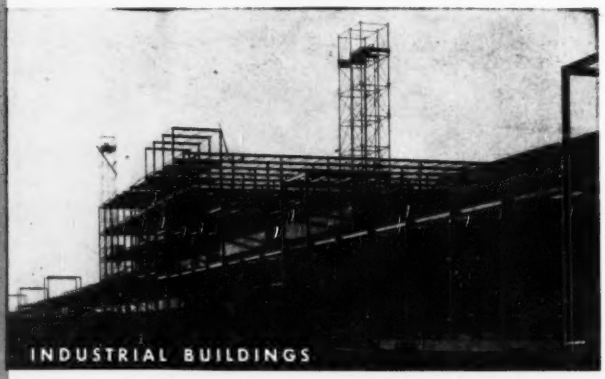

Similar equipment in each of Allied's three plants speeded up fabrication of structurals for this giant industrial plant.

3250 Tons of steel were fabricated by Allied for this California highway bridge . . . erected according to Allied's precision method.

associates of the AVERY ENGINEERING Co., Cleveland, Ohio, to merchandise packaged products in the air conditioning, refrigerating and ventilating field. AVERY ENGINEERING will continue to handle installation work. The firm sells Philco room coolers, Westinghouse fans and water coolers, Air Guard window ventilators, and Ingersoll Koolshades and Sun Screens. Offices will be at 1910 Euclid Ave., Cleveland . . . LINK-BELT Co., manufacturer of chain, power transmission and conveying machinery, to take care of an increased volume of business, has moved its Spokane, Wash., warehouse and district sales office to entirely new, larger and more convenient quarters at North 1303 Washington St., Spokane 13 . . . Representatives from each of the HURON PORTLAND CEMENT Co.'s 12 plants recently attended a 3-day company convention at Alpena, Mich. . . . Bailey Meter Co., Cleveland, Ohio, has announced another large expansion of its staff of field engineers. New field engineers are R. E. Byers, St. Louis; N. P. Campbell, San Francisco; G. F. Fitzpatrick, Denver; R. A. Homan, Pittsburgh; T. A. Melton, Charlotte, N. C.; W. G. Thiemann, New York; J. F. Kontz, Cleveland; G. H. West, Atlanta; N. S. Wilson, Philadelphia; M. G. Johnson, Houston; and R. P. Marche, Chicago.

Reintorcing steel group offers research prize

The Concrete Reinforcing Steel Institute announced establishment of an award to be given annually for noteworthy contributions to the advancement of reinforced concrete construction. A $500 cash award accompanied by a certificate of award will be presented for research contributing to the advancement of reinforced concrete, noteworthy contributions to the theory of reinforced concrete design, and for improvements to construction practices.

Any person, firm or corporation within the continental United States is eligible to compete for the first award, which will be made at the Institute's 25th anniversary meeting at White Sulphur Springs, W. Va., July 14-16. On the award committee is one representative from the American Concrete Institute, the American Society of Civil Engineers, and the Associated General Contractors of America.

Additional information on the award may be had from Harry Delzell, care of Concrete Reinforcing Steel Institute, 38 South Dearborn St., Chicago 3, Ill.

Picture shows a 4-yd Sauerman Scraper Machine, with traveling head tower, digging a basin 1250 ft. long and 360 ft. wide for a sewage plant. Output averaged 200 cu. yd. an hour, with the scraper bucket ranging back and forth across the excavation and dumping its loads into cars through a ramp attached to the front of the tower.

nothing moves earth like a scraper and nothing moves it as cheaply as —

a SAUERMAN SCRAPER

Write Today For Detailed Information & Catalog

It saves you dollars and headaches on long range material handling jobs with its simple operation—low fuel requirements—small maintenance charges—flexibility—sturdiness and all-around dependability. Compare Sauerman equipment with the methods you are using now . . . *you'll see the difference.*

Tough ground conditions mean nothing to a SAUERMAN SCRAPER. It will work anywhere—and *be completely controlled by just one easily trained man.* Gasoline, electric or Diesel power. There's a wide range of sizes and models to meet your every requirement.

SAUERMAN BROS., Inc.
532 S. Clinton St. Chicago 7, Illinois



FLEXCO HD BELT FASTENERS AND RIP PLATES

FOR HEAVY CONVEYOR AND ELEVATOR BELTS OF ANY WIDTH

Flexco HD Fasteners make a tight, butt joint of great strength and durability . . . distribute the strain uniformly. Operate smoothly over flat, crowned or take-up pulleys. Made of steel, Monel, Everdur and Promal.

Flexco Rip Plates are for repairing and patching damaged belts.

Ask for Bulletin F-100

FLEXIBLE STEEL LACING COMPANY • 4656 Lexington St., Chicago 44, Illinois



Strong, Smooth, Readily Troughing
Order From Your Supply House

SMALL PLANTS
are among our best customers

With the largest and most completely equipped organization in the well water developing field, Layne has always provided excellent service for even the smallest plants. In no case have they had to pay a penalty for Layne's world-wide experience and outstanding success. As a matter of fact, Layne Well Water Systems actually cost less when the advantage of unquestionable high quality, proven efficiency and extra long life are considered.

Small plants receive the same professional engineering, skillful workmanship and high quality equipment as is always provided for the largest industries. The only difference is in the size and capacity of the units installed. Several thousand small plants already have their own Layne Well Water Systems. All are highly pleased with their sound investments; the economy of operation cost and the complete dependability of the units at all times.

Small plants of all kinds;--mills, factories, theaters, food processors, packers, railroads, ice plants etc. are invited to make inquiries and to obtain catalogs about Layne's complete service which includes surveys, water strata, explorations, well drilling, pump installations etc. for a complete, thoroughly tested and in operation well water system. No obligation. Address LAYNE & BOWLER, INC., General Offices, Memphis 8, Tenn.

LAYNE
WELL WATER SYSTEMS

AFFILIATED COMPANIES: Layne-Arkansas Co., Stuttgart, Ark. * Layne-Atlantic Co., Norfolk, Va. * Layne-Central Co., Memphis, Tenn. * Layne-Northern Co., Mishawaka, Ind. * Layne-Louisiana Co., Lake Charles, La. * Louisiana Well Co., Monroe, La. * Layne-New York Co., New York City * Layne-Northwest Co., Milwaukee, Wis. * Layne-Ohio Co., Columbus, Ohio * Layne-Pacific, Inc., Seattle, Wash. * Layne-Texas Co., Houston, Texas * Layne-Western Co., Kansas City, Mo. * Layne-Minnesota Co., Minneapolis, Minn. * International Water Corporation, Pittsburgh, Pa. * International Water Supply, Ltd., London, Ont., Can. * Layne-Hispano Americana, S. A., Mexico, D. F.

Men and Jobs

James J. Stabler, formerly chief engineer of The Connecticut Mutual Life Insurance Co., Hartford, Conn., has been promoted to buildings superintendent and officer of the company.

C. T. Murphy has been named director of the street department and public works for the city of Gulfport, Miss.

R. J. Brule of Navasota, Tex., has been made city engineer and manager of Harlingen, Tex. He succeeds **Alfred Tramm** as city engineer and **W. P. Briscoe** as city manager.

Lester D. Lee has been placed in executive charge by Hitchcock & Estabrook, Inc., consulting engineers and architects, Minneapolis, Minn. He is a graduate of Ohio Northern University and spent fifteen years on the staff of the city engineer in Milwaukee, Wis.

Col. John P. Buehler has gone to Portland, Ore., to become executive officer to Col. Theron D. Weaver, North Pacific division engineer, Corps of Engineers. He succeeds **Col. William Whipple**, now head of the Walla Walla district. Colonel Buehler's last previous assignment was to the civil affairs division's economic and supply branch at Washington, D.C. During the war he served in the New Guinea, South Philippines, Luzon and Ryukyus campaigns. He was graduated from West Point in 1934. At Massachusetts Institute of Technology he received his master's degree in civil engineering.

Engineers of the Waterways Experiment Station, Vicksburg, Miss., running tests on a 1:20 scale model of the Algiers Lock, now under construction on the Intracoastal Canal south of New Orleans are, left to right, John W. Bolin and Jack H. Ables, engineers; Thomas E. Murphy, chief of the structures section; and Fred R. Brown, chief of the hydrodynamics branch of the experiment station.

Our 65th Year of Service to CONTRACTORS

Contract Bonds

- Bid & Performance Bonds
- Equipment Floaters
- Complete Casualty Insurance for Contractors

AMERICAN SURETY GROUP

AMERICAN SURETY COMPANY
NEW YORK CASUALTY COMPANY
SURETY FIRE INSURANCE COMPANY
100 Broadway New York 5, N. Y.

Agents and Brokers Everywhere

MacArthur

ORGANIZED 1910

MacArthur
CONCRETE PILE CORP.

18 EAST 48th STREET
NEW YORK 17, N. Y.

CINCINNATI • BOSTON
NEW ORLEANS

CAST-IN-PLACE
PRECAST
COMPOSITE
STEEL
PIPE,
TIMBER

PILES

Also: SOIL AND ROCK BORINGS

FOR FAST and EASY DRILLING

Providing fast and easy operation of the more powerful CP drifter drills, the lightweight G-200R WAGON DRILL greatly reduces drilling costs.

It will drill holes at any angle, and the sliding cone, with a 36-inch adjustment, offsets ground irregularities or uneven steel lengths. Its CP rotary air motor gives a steady feed and quick return, with ample power for pulling tight steel.

Because of the flexibility of its mounting, the Wagon Drill can be quickly adjusted for toe-hole drilling or bench drilling. For line drilling, or drilling close to the face, the carriage wheels can be turned at right angles.

Its three roller-bearing wheels, equipped with pneumatic tires, insure ease of movement however rough the ground. The main frame, uprights and mounting are of seamless steel tubing, providing maximum strength per pound of weight.

Write for complete information.

The G-200R WAGON DRILL is available with CP-50N (3"), CP-60N (3½"), or CP-70 (4") Drifters.

CHICAGO PNEUMATIC TOOL COMPANY

General Offices: 8 East 44th Street, New York 17, N. Y.

PNEUMATIC TOOLS • AIR COMPRESSORS • ELECTRIC TOOLS • DIESEL ENGINES
ROCK DRILLS • HYDRAULIC TOOLS • VACUUM PUMPS • AVIATION ACCESSORIES

When You Need Suction Hose

You Really Need It!

Because suction hose is not used constantly on most construction jobs, many people figure that the cheapest kind of suction hose is good enough.

But we don't figure that way. We know that suction hose not only must take on-the-job punishment, but also the heavy abuse entailed in moving it from one job to another.

That's why you can be sure of "U. S." hose —from the large, heavy sand suction and discharge hose used in dredging operations right down to the everyday lightweight suction hose. Available at your equipment distributor or the nearest branch of United States Rubber Company.

U. S. GIANT SAND SUCTION HOSE.
Toughest abrasion-resistant tube. Powerful fabric and wire reinforcement. Sun and wear resistant cover. Smooth bore. Sizes 4" I. D. and up.

U. S. PEERLESS SUCTION HOSE.
For building construction and trench work. Maximum flexibility without danger of collapse. Smooth bore. 2" to 12" I.D.

U. S. RAINBOW SUCTION HOSE.
Lightweight hose for diaphragm pumps used in sewer and foundation operations. Rough bore. 1½" to 6" I. D. inclusive.

U. S. GIANT CONTRACTORS WATER SUCTION.
Smooth bore, wire-woven carcass abrasive resistant cover. Unusually light weight. Easily reshaped if crushed or flattened. 1½" to 4" I. D. Can be used for suction or high pressure discharge service.

U. S. ENGINEERED RUBBER PRODUCTS FOR THE CONTRACTOR

Air, Water, Steam, Suction Hose • Belts • Packings • Tape

Hydron Absorptive Form Linings
Re-usable Rubber Form Strips

MADE BY U.S.RUBBER
SERVING THROUGH SCIENCE
UNITED STATES RUBBER COMPANY

Robert K. Horton has been appointed a sanitary engineer on the staff of the Ohio River Valley Water Sanitation Commission, the new regulatory agency that will aid states of the Ohio River Basin in stream clean-up programs. Mr. Horton, who is a 1938 University of North Carolina graduate, goes to the commission after six years service in South and Central America where he directed sanitation programs sponsored by the U. S. government through its Institute of Inter-American Affairs. During four years he was a commissioned officer of the Sanitary Corps of the U. S. Army, from which he was honorably discharged with the rank of lieutenant-colonel. Before that, Mr. Horton was a research fellow on stream pollution at the University of North Carolina. From 1938 to 1940 he was employed by the Textile foundation of Washington, D. C., to conduct research on industrial waste treatment methods.

Bruce L. Wilson has been appointed chief of the engineering mechanics section of the National Bureau of Standards. He will direct research on structural elements and metal structures to determine their strength, deformation under load, and other mechanical properties, and will correlate the results with the theory of elastic and inelastic behavior of materials. He also will conduct research on special apparatus and methors for measuring forces, deformations and hardness, and on methods for calibrating such equipment.

Gen. Philip G. Bruton, retired division engineer with the Pacific Coast division, Corps of Engineers, has come out of retirement to join Miller, Ames and Mason, insurance brokers of San Francisco and Los Angeles.

A. E. Stewardson has been named city engineer of New Westminster, B. C., succeeding **R. E. Potter.**

Kent S. Ehrman has been appointed by the Bureau of Reclamation to direct the location and design of 400 miles of main canals, 2,000 miles of laterals and thousands of irrigation structures in the canal system for the Columbia Basin project. A 1933 graduate of Colorado College, he joined the chief engineer's office at Denver in 1933 and most recently has been stationed at Bend, Ore.

Morton L. Laslie, Dover, Ohio, has been named chief of the civil engineers in the Muskingum Conservancy District and will have charge of the district's 14 flood control dams in Ohio. He succeeds **C. E. Fulmer,** transferred to the U. S. Army engineer's office in Huntington, W. Va.

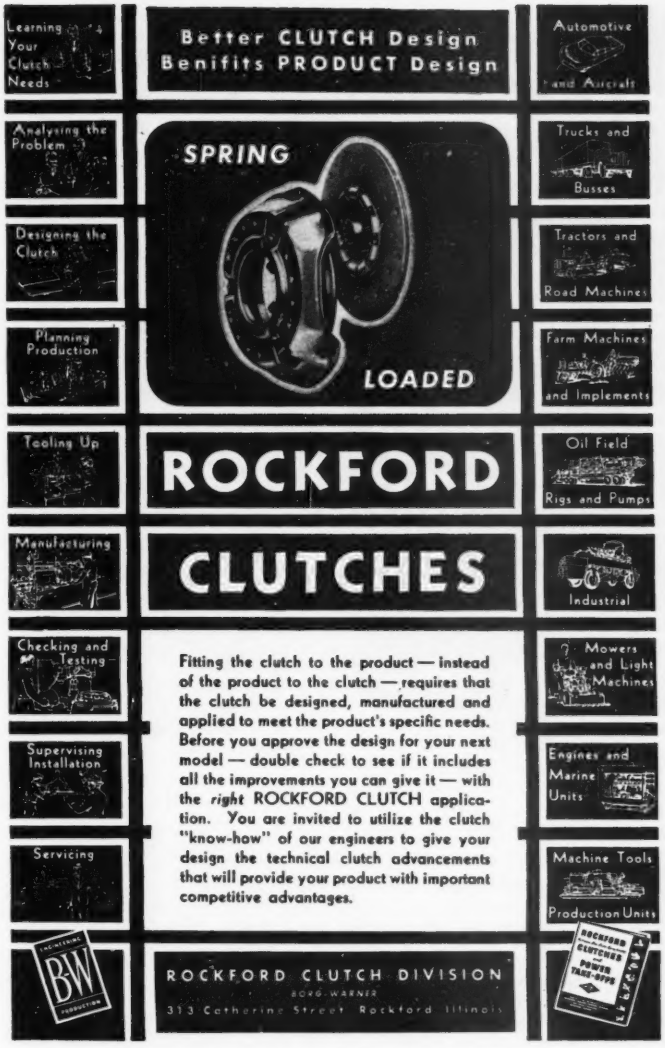
Learning Your Clutch Needs
Better CLUTCH Design Benifits PRODUCT Design
Automotive and Aircraft
Analysing the Problem
SPRING
LOADED
Trucks and Busses
Designing the Clutch
Tractors and Road Machines
Planning Production
Farm Machines and Implements
Tooling Up
ROCKFORD
Oil Field Rigs and Pumps
Manufacturing
CLUTCHES
Industrial
Checking and Testing
Fitting the clutch to the product — instead of the product to the clutch — requires that the clutch be designed, manufactured and applied to meet the product's specific needs. Before you approve the design for your next model — double check to see if it includes all the improvements you can give it — with the right ROCKFORD CLUTCH application. You are invited to utilize the clutch "know-how" of our engineers to give your design the technical clutch advancements that will provide your product with important competitive advantages.
Mowers and Light Machines
Supervising Installation
Engines and Marine Units
Servicing
Machine Tools Production Units
ROCKFORD CLUTCH DIVISION
BORG-WARNER
313 Catherine Street Rockford Illinois

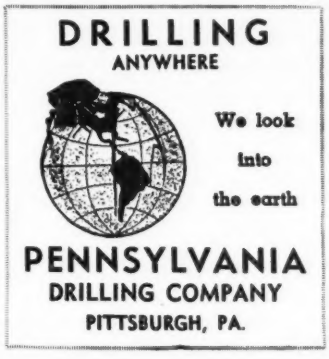

New Transits and Levels by Experts
Each Buff is dependable, accurate and economical.
Send for catalog #329.
Headquarters for Repairs
Every make of instrument, renewed by Skilled Workmen.
Our Shops are located at Jamaica Plain, Boston, Mass.
Buff & Buff Mfg. Company
HENRY A. BUFF, President.

4 BIG PUMP PERFORMANCE POINTS

that only

POMONA GIVES YOU!

1. *Basically designed for water lubrication.* Shaft and bearings are in the water stream, completely lubricated by the water being pumped, thus eliminating oiling at these points.

2. *Open Impellers* that give you complete freedom from sand-locking . . . minimize wear . . . eliminate the need for sealing or wearing rings.

3. *Adjustable Capacity.* With one simple "at-the-surface" adjustment, capacity can be varied over a wide range without power-wasting "throttling." Adjustment nut can also be used to compensate for wear.

4. *Revolvable rubber shaft bearings* that assure long life in rough going . . . quiet, smooth operation.

Only Fairbanks-Morse Pomona Vertical Turbine Deep Well Pumps give *all* these features. Add to them space-saving compactness, efficiency that saves power and minimizes maintenance, and you'll see why Pomona is the top choice for service. Fairbanks, Morse & Co., Chicago 5, Ill.

FAIRBANKS-MORSE

A name worth remembering

Diesel Locomotives • Diesel Engines • Pumps • Scales
Meters • Generators • Stokers • Railroad Motor Cars
and Standpipes • Farm Equipment • Magnetos

Elections and Activities

The Engineers and Architects Club of Louisville, Ky., has elected F. Clarke Dugan, chief engineer for the State Board of Health, president. Other officers are Gordon Beasley, vice-president and Charles E. Breitbeil secretary. Directors are Maurice L. Miller, retiring president; F. F. Schrader, Walter Fusick, Allan Cook, John F. Mayrose, and Fred H. Elswick.

The Washington, D. C., Society of Engineers has elected these life members: William W. Burrell, C. L. Garner, C. A. Peterson, Clegge Thomas, and Charles H. Tompkins.

W. T. Potter has resigned as president of the Carolinas branch of the A.G.C. His successor is E. D. Sloan.

The Kentucky Society of Professional Engineers has elected: H. A. Spalding, president; John Bitterman and O. L. Deep, vice-presidents; C. S. Crouse, secretary-treasurer; and as directors, Marion Ross, C. P. Hazelett, G. R. Watkins and J. V. Proctor.

Prof. J. M. Faircloth, head of the department of civil engineering at the University of Alabama, has been elected president of the Alabama Section of A.S.C.E. He succeeds Walter Schielke, Virginia Bridge Co. Other officers elected are: Arthur N. Beck, director, Bureau of Sanitation, State Board of Health, Montgomery, vice-president; J. B. Converse, of J. B. Converse Engineering Co., Inc., Mobile, second vice-president; Warren Keith, professor, School of Engineering, University of Alabama, and C. P. Willoughby, secretary and treasurer.

North Carolina section of the American Society of Civil Engineers has elected John D. Watson, president; B. W. Davis and Col. J. Norman Pease, vice-presidents; and George H. Maurice, secretary and treasurer.

G. W. May has been elected president of the Arkansas Chapter AGC; S. M. Dixon, 1st vice-president; M. O. Branton, 2d vice-president; and Ray Metzger, secretary-treasurer.

Detroit chapter, Associated General Contractors, has elected W. R. Bryant president. Other officers: C. H. Richert, first vice-president; B. B.

LONG EXPERIENCE AND EXTENSIVE FACILITIES FOR ENGINEERING AND CONSTRUCTION IN GUNITE

- **Lining for tunnels, mines, steel bins and hoppers**
- **Lining old, tuberculated, or clogged water mains to renew life and increase flow capacity**
- **Rehabilitation of dams, docks, bridges and walls**
- **Restoration of spalled, weathered or damaged concrete buildings**
- **Refractory linings for furnaces and stacks**

Our Engineers are available for consultation

NATIONAL GUNITE CORPORATION

211 East 37th St. — New York 16, N. Y.
101 West Dedham Street — Boston 18, Mass.
418 Evans Building — Washington 5, D. C.

LITH-I-BAR CONCRETE JOISTS

IMMEDIATELY AVAILABLE

For all types of fire-safe buildings. For any type building from small homes to commercial or industrial buildings, the Lith-I-Bar System will provide greater speed, simplicity, economy in field work, therefore, greater economy. Lith-I-Bar Machine made joists embody electrically welded reinforcements.

Write, wire or call for location of your nearest licensed manufacturer.

GET THIS FREE

LITH-I-BAR CO.
BOX A-AB HOLLAND, MICH.

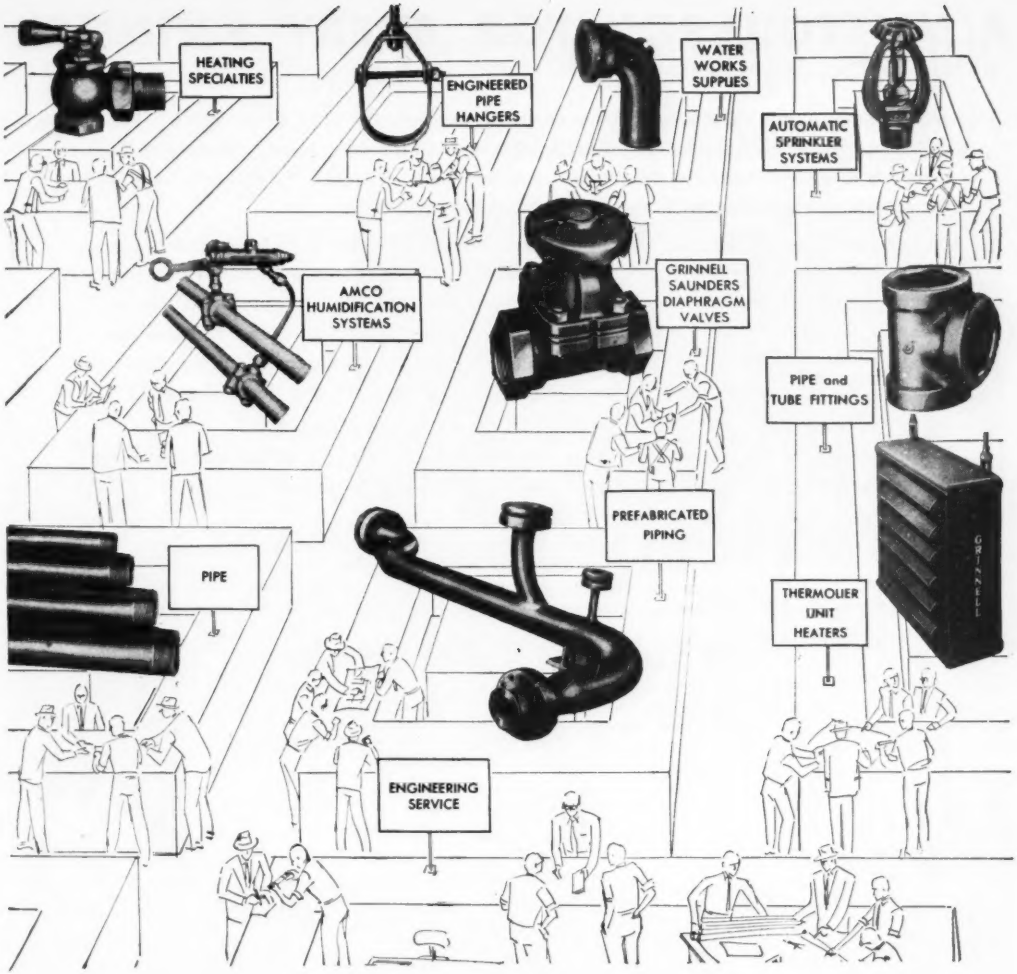

EVERYTHING FOR **PIPING** UNDER ONE ROOF

Shop for piping the easy way — call Grinnell. At each Grinnell warehouse a staff of experienced piping specialists is ready to help you with engineering assistance. Save time, save money, save the trouble of shopping around. Make a Grinnell warehouse your service center for everything in piping from a simple water connection to a 1500 lb. steam pressure line. No job too small, no job too large. Remember to call on Grinnell "whenever PIPING is involved".

99 YEARS PIPING

GRINNELL

Grinnell Company, Inc., Providence 1, Rhode Island. Branches: Atlanta • Buffalo • Charlotte • Chicago • Cleveland • Cranston • Fresno • Kansas City • Houston Long Beach • Los Angeles • Milwaukee • Minneapolis • New York • Oakland • Philadelphia • Sacramento • St. Louis • St. Paul • San Francisco • Seattle • Spokane

A "LIFEGUARD" FOR EVERY SWIMMER

Modern swimming pool chlorination with economical dependable W&T Chlorinators is like having a "lifeguard" for every swimmer. Whether the bathing load is light or heavy, chlorination is always on the job to destroy bacteria the moment it enters the pool water. It's the safe, sure way to prevent the spread of water-borne infection.

For a "lifeguard" in your design, choose a W&T Chlorinator or Hypochlorinator—precision built for the job and carefully designed from over 30 years' experience—to ensure unfailing chlorination. W&T Equipment is constructed especially for easy operation and upkeep without highly trained personnel, and has the approval of health authorities throughout the country. W&T Reagent Feeders, too, are built to the same high standards to give the most in handling the application of coagulant and other chemicals.

In addition, your W&T Representative, an engineering specialist in chlorination, is always ready to help you with any problem in pool sterilization or equipment selection. Why not get in touch with him today?

Write now for the free booklet, "Swim in Drinking Water", which will give you details on the application of W&T Equipment for pools as well as many helpful hints on pool construction and operation.

WALLACE & TIERNAN
COMPANY, INC.
CHLORINE AND CHEMICAL CONTROL EQUIPMENT
NEWARK 1, NEW JERSEY • REPRESENTED IN PRINCIPAL CITIES

Jackson, second vice-president; Glenn Lamont, treasurer; and L. M. Denton and R. E. Pickett, directors. Continuing as secretary-manager is Ralph A. MacMullan.

Engineers and architects of Georgia have formed the Engineers and Architects Council of Georgia. Eugene W. O'Brien was elected president. Other officers are: Cherry Emerson, vice-president, and George N. Normancy, secretary-treasurer.

E. D. Sloan, elected president of the Carolinas branch, Associated General Contractors of America, Inc. He succeeds W. T. Potter, resigned. Other officers: N. K. Dickerson vice-president; C. P. Stret, treasurer, and Robert Patten executive secretary.

The Massachusetts Public Building Commission recently elected Alan J. Potter, president; Ernest A. Johnson, Frank W. Crimp, Irving B. Parkhurst, and Frederick Guffey vice-presidents, and John A. Chambers, secretary.

Charles Nourse is the new president of the Building Contractors Association of Indianapolis, Ind., succeeding Louis W. Brandt. Vice-presidents are Arthur Vehling and F. A. Wilhelm, secretary-treasurer, Ralph Iula, executive secretary, C. O. Holmes, assisted by E. J. Ulmer, who also has charge of the association's apprentice training program.

Milton Rosen, commissioner of public works of St. Paul, Minn., has been re-elected president of the Minnesota Good Roads Association. Directors are: Wayne Peterson, S. S. Daniels, M. C. Zenner, and John Dieseth.

MAJOR MEETINGS

American Society of Civil Engineers, Biltmore Hotel, Oklahoma City, Okla., April 20-23.

American Geophysical Union, U. S. National Museum and National Academy of Sciences Auditorium, Washington, D. C., April 20-22.

American Wood Preservers Association, Jefferson Hotel, St. Louis, Mo., April 26-28.

First International Civil Engineering Congress, Mexico City, Mexico, April 30-May 7.

American Road Builders' Assn., Southeastern States Conference, General Oglethorpe Hotel, Savannah, Ga., May 11-13.

Society for Experimental Stress Analysis, Hotel Statler, Detroit, Mich., May 19-21.

American Water Works Association, Stevens Hotel, Chicago, Ill., May 30-June 3.

Permanent buildings like this cost less than you think!



Luria Buildings can be used for anything from a warehouse to the heaviest type of industrial building . . .

and for any type of commercial building — from a showroom to a shopping center.

They're easy to erect, and *available now!*

Standard Buildings by Luria are rugged, heavy steel-frame structures, designed to meet the most exacting building codes. Yet they cost little or no more than light-weight temporary buildings. Moreover, Luria Buildings offer you such a wide range of sizes, optional features and collateral materials that there's practically no limit to the number of combinations available to meet the precise requirements of any building job.

The building framework is entirely self-supporting and all field connections are designed for bolting. This permits fast, economical erection, without welding, cutting or drilling. Many sizes are carried in stock, ready for immediate delivery. Before you bid on a new building, be sure to get the complete facts on Standard Buildings by Luria. The coupon below will bring you a copy of our new 20-page catalog, without cost or obligation.

STANDARD BUILDINGS BY LURIA

LURIA ENGINEERING CORPORATION
500 Fifth Ave., New York 18, N. Y., Dept. E-12

Gentlemen:
Please send me a copy of your new catalog.

NAME.....

COMPANY.....

ADDRESS.....

CITY.....STATE.....

DISTRICT OFFICES: ATLANTA, BOSTON, CHICAGO, PHILADELPHIA, PITTSBURGH, AND WASHINGTON, D. C.

A practical program for making our cities

—more beautiful
—more convenient
—more livable

This book offers a completely realistic survey of all the problems involved in building more orderly cities—economics, politics, administration, finance and design—and outlines a practical, step-by-step program that meets modern needs for beauty, utility and growth.

NEW CITIES FOR OLD

By LOUIS JUSTEMENT
Architect, Washington, D. C.

232 pages • 7 x 10 • $4.50

1 Will city planning work? This author leaves no doubt—showing how the problems involved can be solved to integrate the responsibilities of economists, public officials, realtors, architects, builders, bankers, etc. Outlining a broad program of city planning and rebuilding, the book shows what must be done and how to do it. It allows for variation within its overall planning program and indicates a way for each city to develop its own best, individual methods.

Examine these McGraw-Hill Books 10 DAYS FREE!

PRACTICAL ASTRONOMY

2 **By Jason John Nassau.** A valuable reference and guide for civil engineers and others interested in the astronomical calculation of time, longitude, latitude, and azimuth. It describes the fundamental principles of astronomy—the coordinate system, the use of astronomical triangles, application of sidereal time . . . how to use instruments and how to make accurate computation with the data obtained. $5.00

SURVEYING

3 **By Philip Kissam.** Provides information on surveying for students in all branches of engineering. Covers mapping and detailed measurements of small areas, the control of new constructions and precise machine location, and the establishment of dimensions of jigs and fixtures for large products. Basic surveying methods are presented and the construction, theory and use of the transit and level are emphasized. $3.50

Contracts in Engineering

4 **By James Irwin Tucker.** Provides a simple, brief statement of the spirit of the law which underlies whole groups of cases that are important in engineering and general business affairs. It presents material designed to help the engineer cooperate efficiently with lawyers and to appreciate more perfectly the need for their assistance. $5.00

McGraw-Hill Book Co., 330 W 42nd St., NYC 18

Send me book(s) corresponding to numbers encircled below for 10 days' examination on approval. In 10 days I will remit for books I keep, plus few cents for delivery, and return unwanted book(s) postpaid. (We pay for delivery if you remit with this coupon; same refund privilege.)

(1) (2) (3) (4)

Name .....

Address .....

City ..... Zone ..... State .....

Company .....

Position ..... NR 4-14-49

New Engineering Books

(*Continued from page 80*)

TABLES OF BESSEL FUNCTIONS OF FRACTIONAL ORDER—Vol. II—Prepared by The Computation Laboratory of the National Applied Mathematics Laboratories, National Bureau of Standards. 365 pp. Columbia University Press, New York. $10.

THEORY OF OSCILLATION—By A. A. Andronow and C. E. Chaikin. 358 pp. Princeton University Press, Princeton, N. J. $6.

FLUID MECHANICS—Second Edition. By R. C. Binder. 361 pp. Prentice-Hall, Inc., New York 11. $5.65.

BEVEL ANGLES FOR THREE DIMENSIONAL CONNECTIONS—By Frank L. Martindale. 62 pp. Frank L. Martindale, Philadelphia, Pa. $7.50.

MODERN TIMBER ENGINEERING—Third Edition—By W. Fleming Scofield and W. H. O'Brien. 147 pp. Southern Pine Association, New Orleans, La. $1.50.

THE SCIENCE AND ENGINEERING OF NUCLEAR POWER—Vol. II—Edited by Clark Goodman. 317 pp. Addison-Wesley Press, Cambridge, Mass. $7.50.

Miscellaneous Notes on Booklets and Reprints

"PLANNING Garbage and Refuse Facilities for the Small Community," is the title of a booklet recently published by the Tennessee Planning Commission, Knoxville, Tenn. The booklet, which is a sound instructive guide for public-works managers with little experience in this field, describes all phases of refuse collection and disposal, analyzes advantages and disadvantages of disposal methods and includes copies of suggested and in-use refuse-disposal ordinances. The booklet may be obtained from the commission for $1.

PUBLICATION of a "Light-Gage Steel Design Manual" by the American Iron and Steel Institute is an important landmark in the development of this type of construction. Supplementing the "Specification for the Design of Light-Gage Steel Structural Members," the manual presents design charts and structural properties of cold-formed basic sections for steel sheet or strip of thicknesses from 0.135 to 0.048 in., with nominal gages from 10 to 18. These data will greatly simplify design calculations and will tend to encourage the trend toward light-gage structures. The 77-page booklet can be obtained for $1 from the AISI, 350 Fifth Avenue, New York 1, N. Y.

A REPORT ON WATER-TIGHTNESS of structural-clay facing-tile walls has

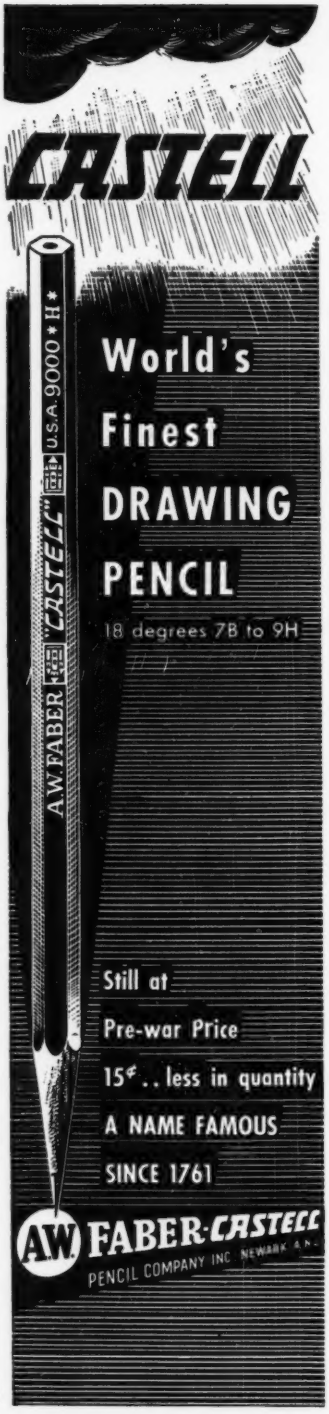

For heavy concrete breaking,
BARCO MODEL H-6B

No Job too Big or Small for BARCO

FOR heavy concrete breaking and backfill tamping, the Barco Hammer (H-6B) is unbeatable. Its portability means easier handling, plus the ability to get jobs done in difficult or hard-to-reach spots. Barco is packed full of power, deals a smashing battering attack that never slackens no matter how tough the going. And as for profit, Barco's mechanized muscles do more work at lower cost. For lighter work, especially frost breaking, use Barco Hammer (J-2). Write Barco Manufacturing Company, 1814 Winnemac Avenue, Chicago 40, Illinois. In Canada: The Holden Co., Ltd., Montreal, Canada.

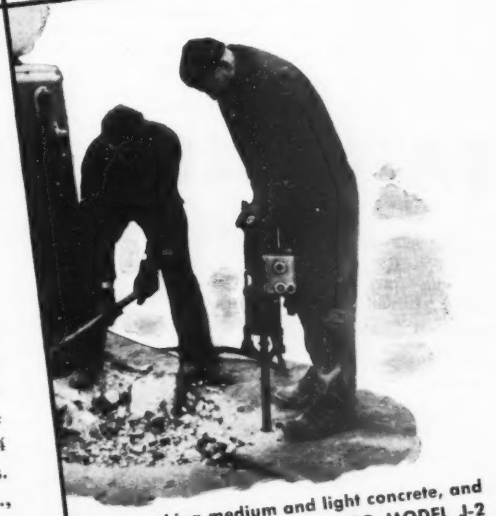

For breaking medium and light concrete, and hard or frozen ground, BARCO MODEL J-2

FREE ENTERPRISE—THE CORNERSTONE OF AMERICAN PROSPERITY

BARCO PORTABLE HAMMERS • BREAKING · DRILLING DRIVING · TAMPING

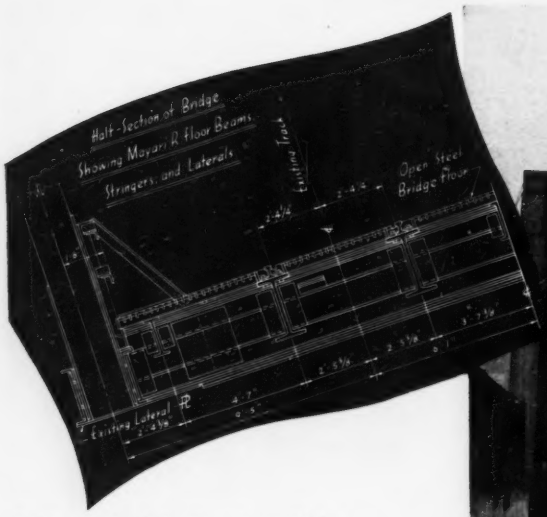

Drawing showing half-section of remodeled bridge with new floor members of Mayari R. Note how the track running-rails are bolted directly to stringers without use of timber ties.

Conemaugh and Black Lick Railroad bridge erected in 1906. Mayari R floor members were recently installed a panel at a time without disrupting traffic.

MAYARI R floor members saved the cost of a new bridge

New floor members of Mayari R steel have increased the load capacity of this 43-year old bridge by more than 50 pct so as to make it suitable for present-day traffic.

Spanning the Little Conemaugh River at Johnstown, Pa., the double-track, through-truss structure is 207 ft in length and was built on a 34 ft, 6 in. skew with trusses 31 ft apart. It was originally designed to carry axle loads of 50,000 lbs.

Mayari R floor beams, stringers, stringer bracing, and bottom laterals secured by Mayari R rivets, were used to replace the original built-up members of carbon steel. The bridge is now in first-class condition and will safely handle axle loads of 76,600 lbs.

This is only one of many bridges in which low-alloy, high-tensile Mayari R steel has been used to advantage during the past decade. Others range from small repair jobs to complete bridge erection projects.

We shall be glad to furnish complete information regarding suggested stresses for bridge design with Mayari R. Write or phone our nearest sales office.

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation
Export Distributor: Bethlehem Steel Export Corporation

★ BETHLEHEM STEEL ★

Mayari R *makes it lighter... stronger... longer lasting*

been released by the Office of Technical Services of the Department of Commerce. In the study, made by the University of Minnesota in 1947, samples of various types of tile wall sections were exposed to simulated wind and rain to determine the best methods of protection against wall leakage during prolonged exposure. Factors affecting the bond between tile and mortar were found to be more important than the nature of the exposed tile surface. Consequently, use of a dense, well-graded mortar applied in well-filled joints is recommended. The 35-page pamphlet, PB-94388, "Water Permeability of Structural Clay Tile Facing Walls," is available from the Office of Technical Services, Department of Commerce, Washington 25, D. C. at $1 per copy. Orders should be accompanied by check or money order payable to the Treasurer of the United States.

Reports and Pamphlets

DETERMINATION OF FACTORS AFFECTING LAMINATION IN STRUCTURAL CLAY PRODUCTS—Bulletin 164—By A. L. Johnson. The Director, Iowa Engineering Experiment Station, The Iowa State College, Ames, Iowa.

CAREERS IN ENGINEERING AND SCIENCE—A guidance booklet prepared by the Polytechnic Institute of Brooklyn, 99 Livingston St., Brooklyn 2, N. Y.

THE OUTLOOK FOR WOMEN IN ARCHITECTURE AND ENGINEERING—Bulletin of the Women's Bureau No. 223-5. For sale by the Superintendent of Documents, Washington 25, D. C. Price 25c.

THE APPRAISAL OF TERRAIN CONDITIONS FOR HIGHWAY ENGINEERING PURPOSES—Bulletin No. 13—Highway Research Board, Washington 25, D. C.

PROCEEDINGS OF THE OHIO HIGHWAY ENGINEERING CONFERENCE—Bulletin No. 134—Engineering Experiment Station, Ohio State University, Columbus, Ohio. $1.

DOUGLAS FIR OF THE WESTERN PINE REGION — Western Pine Association, Yeon Building, Portland 4, Ore.

CALCULATING DEFLECTION OF CURVED BEAMS—By Kenneth E. Lfgren—Engineering and Science Series Number 31—Cooper Union Bulletin, The Cooper Union, New York 3, N. Y.

SOILS COMMITTEE REPORTS AND SPECIAL PAPERS—Bulletin No. 14. Highway Research Board, Washington 25, D. C.

VERMONT'S 1948 HIGHWAY NEEDS—Commissioner of Highways and Chief Engineer, Montpelier, Vermont.

ALUMINUM ALLOY CASTINGS—The Aluminum Association, 420 Lexington Ave., New York 17, N. Y. $.50.

"Who's doing the work... YOU OR THE PUMP?

SAVE TIME...SAVE MONEY... ON MAINTENANCE WITH ECONOMY PUMPS

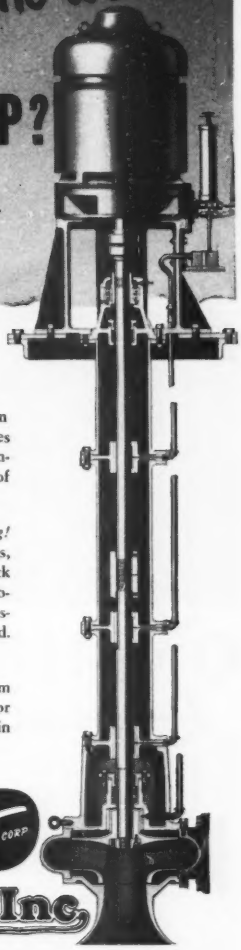

Maintenance time and costs hit a new low when you do your pumping with Economy. Case histories on Economy's Sump Pumps, for example, show continuous trouble-free operation over thousands of hours service.

Screenless, these pumps are *really non-clogging!* Smooth, clear passages permit free passage of rags, solids or bulky material. Exclusive heavy-duty shock absorber prevents deflection of shaft by heavy objects entering impeller. All joints in drop pipe suspension are accurately machined and registered. Bronze, pressure grease-lubricated bearings.

Available in single or duplex units. Capacities from 50 to 10,000 G.P.M. Heads from 10 to 100 ft. For complete details, write Dept. CB-11 for Bulletin E-345.

Centrifugal, axial and mixed flow pumps for all applications.

Economy Pumps Inc.

Division of Hamilton-Thomas Corp.

HAMILTON, OHIO

OHIO LOCOMOTIVE CRANES

GASOLINE • DIESEL ELECTRIC • STEAM



25 TO 40 TON CAPACITY

THE OHIO LOCOMOTIVE CRANE CO

BUCYRUS, OHIO

Diamond Core Drilling

CORE BORINGS for Foundations, Dams, Bridges and all Heavy Structures

GROUT HOLES

Tinney Drilling Co.

Grafton, W. Va.

Gorman-Rupp pumps in action on storm sewer job in Corpus Christi, operating at 20 ft. suction lift. Jay DePuy and E. C. DePuy, contractors, are using 14 Gorman-Rupp's on this job.

ON-THE-JOB --

Performance IS WHAT COUNTS!

When you're keeping a hole dry or holding a river back, priming speed, efficiency and dependability of your pump means everything.

Gorman-Rupp self-priming centrifugal pumps can help you complete your contracts on time and at a greater profit. They challenge any contractors' pump, size for size, to equal their all around performance.

We invite you to give these new Gorman-Rupp pumps an ON-THE-JOB test for your own satisfaction.

We back our claims with a money back guarantee.

Made in all sizes: 7M - 10M - 15M
20M - 40M - 90M - 125M

Ask for the new Contractors' Bulletin No. BCP-11

THE GORMAN-RUPP COMPANY
MANSFIELD, OHIO

OBITUARY

Ralph Whiteley Berry, 69, civil engineer, topographic engineer and map editor for the United States Geological Survey for more than 45 years, died recently in Washington, D. C. A graduate in civil engineering from Vanderbilt University in 1901, Mr. Berry began work with the Geological Survey that same year. Except for a year with the Isthmian Canal Commission in Panama in 1905, two years in the Army as an Engineer Corps captain during World War I and several years as a private surveyor in the 1930's, Mr. Berry remained with the bureau until his death. One of the more topographically intricate problems Mr. Berry worked on was a relief map of the Mesa Verde National Park in Colorado. He received a meritorious service award from the Interior Department for work on Pacific Island relief maps, especially one of Japan, done for the United States Army.

Irving C. Hess, 68, engineer for the California Water & Telephone Co.'s San Diego Bay division, San Diego, Calif., died recently. He was a pioneer in railroad engineering and surveying, having moved to California in 1903 to work for the Southern Railway Co. Mr. Hess joined the California Water & Telephone Co. in 1936 at Monterey, where he was division engineer. He started with the Baltimore & Ohio Railway. After 3 years of working with California railways, he studied a year at Stanford University and then went to Bolivia with B. & O. engineers to make surveys for the Bolivian National Railways. On returning to this country he worked for lumber railroads, for the Oroville-Wyandotte Irrigation District in Butte County and the Pacific Palisades Association. He was a graduate of Baltimore Polytechnic Institute.

John Bernard Hawley, division construction engineer for the Tennessee Department of Highways & Public Works died recently. He had served for a longer period than any other man in a similar position with the department. Prior to his service with the department he was connected for a long period with the Bureau of Public Roads (now the Public Roads Administration).

Orville W. Jenkins, 65, Michigan builder and engineer, died recently. He built the Saginaw General Hospital and a number of school buildings in that area before going to Detroit,

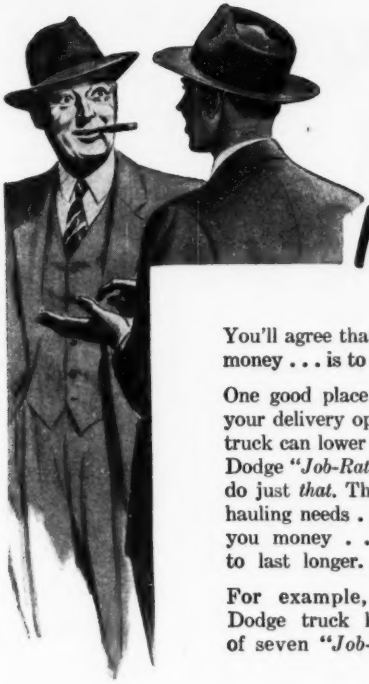

CONTRACTORS:

Lower Delivery Costs Mean Lower Overhead

You'll agree that a good way to *make* money . . . is to *save* money.

One good place to watch costs is in your delivery operation. For the *right* truck can lower delivery costs plenty! Dodge *"Job-Rated"* trucks are built to do just *that.* They're built to *fit* your hauling needs . . . save you money . . . and to last longer.

For example, every Dodge truck has one of seven *"Job-Rated"* truck engines. It is a high-compression engine of advance design . . . which insures maximum efficiency, with "top" economy.

Each has exactly the right clutch, transmission, rear axle, and every other unit . . . *"Job-Rated"* for maximum dependability, and long life.

Let your Dodge dealer tell you the whole *"Job-Rated"* story. You'll quickly realize his story makes sense! And remember . . . *only* Dodge builds *"Job-Rated"* trucks.

For the good of your business—

Switch to "Job-Rated" DODGE TRUCKS

Helping to Harness a River

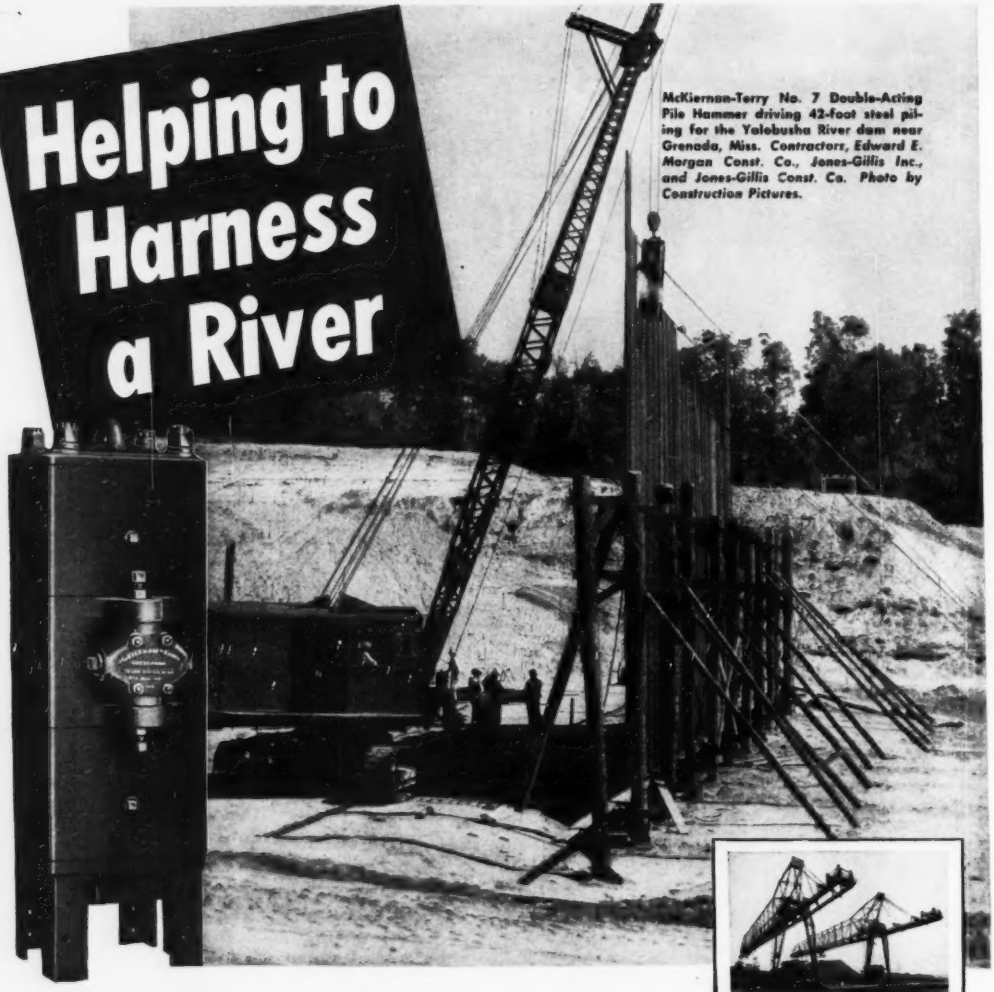

McKiernan-Terry No. 7 Double-Acting Pile Hammer driving 42-foot steel piling for the Yalobusha River dam near Grenada, Miss. Contractors, Edward E. Morgan Const. Co., Jones-Gillis Inc., and Jones-Gillis Const. Co. Photo by Construction Pictures.

The Grenada Dam, part of a wide flood control plan for the Yazoo River Basin, is an earth dam with a concrete spillway. A McKiernan-Terry Pile Hammer was chosen to drive the necessary steel piling . . . another tribute added to those being constantly paid by contractors to the dependability of McKiernan-Terry Pile-Driving Equipment.

The complete McKiernan-Terry line offers a choice of ten different sizes in Double-Acting Hammers, five Single-Acting sizes and two Double-Acting Pile Extractors . . . a right hammer for any specified job.

WRITE FOR LITERATURE

Specifications and other data on McKiernan-Terry Hammers will be sent you on request—helpful information you should have on file.

ALSO MADE BY McKIERNAN-TERRY

The same engineering and manufacturing skill that has made McKiernan-Terry Pile Hammers so outstanding in the field of construction is applied also to bulk material unloaders, coal and ore bridges, marine equipment, cranes, bridge operating mechanisms and other important machinery of service to industry, railroads and the government.

MK-264

McKIERNAN-TERRY CORPORATION • MANUFACTURING ENGINEERS • 13 PARK ROW, NEW YORK 7, N. Y.

McKiernan-Terry PILE HAMMERS AND EXTRACTORS

where he erected several large housing projects.

Clyde B. Asher, 65, Washington, D.C. construction engineer, died there recently. Mr. Asher went to Washington in 1909 shortly after graduation from Ohio State University where he received a B.S. degree in engineering. He was in the construction business in the Washington area until his retirement in 1940.

E. Russell Davis, 58, active in community affairs at Sidney, N. Y., and since 1946 city engineer of Norwich, N. Y., died recently. He was a 1913 graduate of the college of engineering at Cornell University. At one time he was city engineer of Newport News, Va., and later was with the U. S. Gypsum Co., as construction engineer and supervisor in building its plants at Staten Island, N. Y. City, Canaan, Conn., and Philadelphia, Pa.

Charles A. S. Howlett, 76, a retired professional engineer of Collingswood, N. J., died recently. He was a former teacher at the College of South Jersey.

N. T. Binks, 61, consulting engineer, of Montreal, Que., died there March 7. A graduate of McGill University, he served with the Royal Canadian Engineers in the first world war.

Donald W. Herndon, 42, soil cement engineer for the Portland Cement Association, died at Daytona Beach, Fla., March 3. A graduate of the University of Missouri, 1931, he formerly was an engineer for the Missouri highway department.

William J. Chisholm, 71, civil engineer, died at Antigonish, N. S., March 3. For many years, he was in rail and road construction in the western provinces, then returned east to become active in road construction in Nova Scotia.

James Bartlett O'Brien, superintendent of King Paving Co. Ltd., Toronto and Oakville, Ont., and for the last 40 years an outstanding figure in the highway construction business, died March 8.

Harrison W. Fitzgerald, 76, a Buffalo, N. Y., engineer whose work took him to all parts of the United States and Russia, died March 9 at his home in Hamburg, N. Y. He was with the Armco Steel Co. of Chicago. He worked for the Bethlehem Steel Co. in Buffalo for 25 years before leaving in the 1930's to work abroad for the Freyn Engineering Co. He spent two years there and on his return to this

Where Wood Needs Protection from DECAY and TERMITES

WOLMANIZED PRESSURE TREATED LUMBER

. . . lasts 3 to 5 times longer

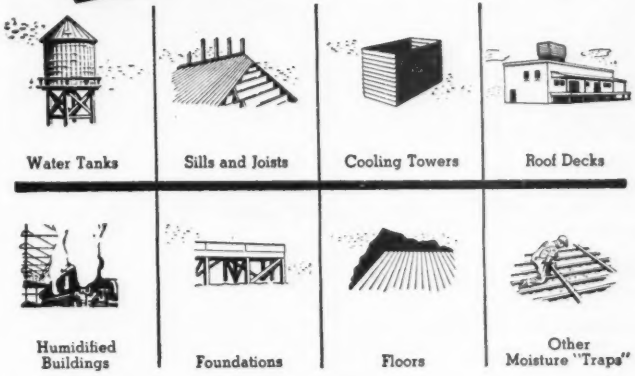

Here are six common conditions where WOLMANIZED Pressure-Treated Lumber provides protection from decay and termites:

1. Where excessive ground moisture, rain or thaws cause early decay failures.
2. Where wood near the ground is open to termite attacks.
3. Where wood is in contact with damp concrete or masonry.
4. Where steam and vapor from industrial processes promote wood decay.
5. Where walls, floors, ceilings are subject to condensation from refrigeration.
6. Where wood is exposed to moisture in artificially humidified buildings.

Investigations by qualified technologists prove that on installations where decay and termites ordinarily shorten lumber life, WOLMANIZED Pressure-Treated Lumber lasts *Three to Five Times Longer* than untreated wood.

Such lasting protection is assured because penetrating, preservative solutions are forced, by vacuum-pressure treatment, deeply into the wood fibers of WOLMANIZED Lumber. And, WOLMANIZED Lumber is clean, odorless, paintable, non-corrosive, non-leaching and glueable. Only WOLMANIZED Lumber offers *all* these extra advantages.

YOU'LL PROFIT BY GETTING THIS INFORMATIVE BOOKLET

Get all the facts and cost-saving figures on WOLMANIZED Lumber. See why it offers you the best protection available against wood decay and termites. Write for this valuable booklet today.

AMERICAN LUMBER & TREATING COMPANY

General Offices: 332 South Michigan Avenue, Chicago 4, Illinois

Branch Offices: Baltimore, Boston, Jacksonville, Fla., Los Angeles, New York, Philadelphia Portland, Ore., San Francisco, Washington, D. C.

If you're digging for profits
BUY BROWNHOIST BUCKETS!

Check your bucket when you find your materials handling costs on the upgrade. If it isn't doing its part, *better change to a Brownhoist Bucket.* For coal, ore, sludge, slag, rock or clay, Brownhoist Builds Better Buckets! They're engineered to take full bites, year after year with trouble-free operation. Bumps, shocks, stress and strain they take in their stride. Available in rope-reeve, power wheel and link type. *Write for latest catalog* of Brownhoist Buckets and features.

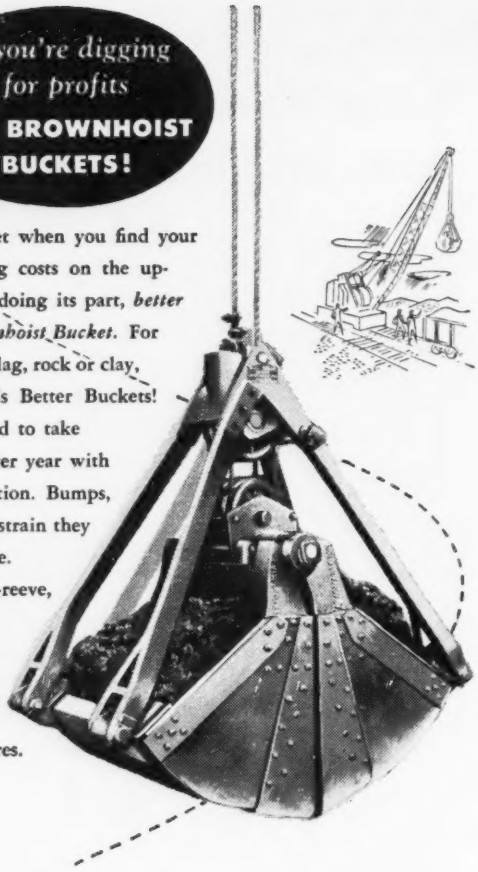



INDUSTRIAL BROWNHOIST CORPORATION • BAY CITY, MICH.

FLINK SPREADERS

Unquestionably the finest hydraulic spreader

Hundreds more transportation companies, cities and counties are using Flink Spreaders to spread granulars in ice control and highway maintenance work. Spread forward or backing up, full or half width of street. Controlled from cab. Write for literature.

FLINK CO Dept. S-6, Streator, Ill.

MOTT Diamond Core Drilling Contractors

FOUNDATION TESTING
for
Bridges, Dams, Heavy Structures
PRESSURE TESTING

MFR'S DIAMOND & SHOT CORE DRILLS, GROUT MIXING MACHINES, PACKERS AND GROUT PUMPS

MOTT CORE DRILLING CO.
HUNTINGTON, W. VA.

country joined the United Engineering Co. of Chicago.

Edward M. DeMunn, 75, former superintendent of public works at Geneseo, N. Y., died in his home there March 8.

Chester E. Albright, 88, who was president of the Philadelphia consulting engineering firm of Albright & Friel, Inc., until his retirement in 1945, died in Philadelphia on March 29. He was graduated from Lafayette College in 1883. In 1890 he established an office in Philadelphia for consulting engineering. In 1904 Albright & Mebus was founded. It continued in consulting practice until 1931 when the present firm of Albright & Friel, Inc., was organized. From 1916 to 1920, Mr. Albright was chief engineer of the bureau of engineering and surveys of Philadelphia. He was in continuous private practice for 55 years, serving many clients throughout the United States, and his engineering activities extended as far as the Dominion of Canada, England and Argentina.

G. Otis Wright, 66, of East Cleveland, Ohio, for more than 35 years a consulting engineer in steel construction and design, died in St. Petersburg, Fla., March 24.

Arthur Gaudin, 70, a contractor who built many large buildings in Montreal, Que., died there March 23. He was said to have been the first in Montreal to use reinforced concrete in construction.

Sumpter Lea Harwood, 73, city engineer of Uniontown, Ala., for 39 years, died recently. He was a graduate of Alabama Polytechnic Institute, Auburn, Ala., and Cornell University, Ithaca, N. Y.

Alvin E. Lynn, 63, superintendent of the works department of Frankfort, Ky., and a city employee for the last 40 years, died March 22.

Ira Payne Jones, Sr., 54, construction engineer for C. B. Kelley and Co., contractors, died March 30 in Nashville, Tenn. He attended Vanderbilt University and was graduated from Massachusetts Institute of Technology. He had been employed as construction engineer for C. B. Kelley Co. for the last 12 years, and had formerly been employed with the Kirkpatrick Lumber Co. for about 10 years. A veteran of both world wars, Mr. Jones served in World War II for four years as captain in the Engineering Corps.

"FLEETWELDERS" ELIMINATE ARC BLOW ...increase welding speed 10%

By J. K. GANNETT
Vice President in charge of Engineering and Research, The Austin Company, Cleveland, Ohio

J. K. Gannett

The solid, uniform welds required in our heavy structural work are now being made easier and at lower cost with AC arc welding. By eliminating the restrictions of arc blow in the construction of heavy structural weldments like the roof truss shown, our fabricating shop is today able to take full advantage of higher welding currents with resulting substantial increases in welding speeds.

Structural members like the jack truss shown in the photographs are shop fabricated from wide flange beams and from plate. Component members are first positioned accurately for close fit-up and tack welded. One side is then partially welded with fillets of ¼" "Fleetweld 7" electrode using 500-amp. Lincoln "Fleetwelder" AC arc welders.

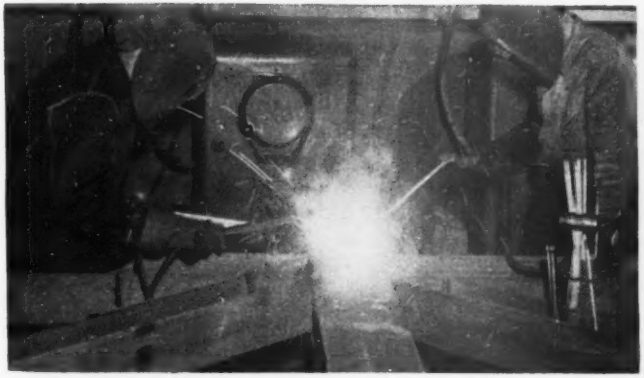

Fig. 1. *Arc welding diagonals to chord with the 500-amp. Lincoln "Fleetwelder" AC welders at the structural fabrication shop of The Austin Company.*

After the initial side welds are made, the truss is placed in an upright position as shown in Fig. 2 and continuous welds completed around each member, framing into the lower chord. The truss is then flopped over and similar welding is done for the members framing into the other chord. This procedure permits us to use fast downhand welding techniques on all connections and assures us solid, high quality welds on all joints at the lowest fabricating cost.

Using the AC "Fleetwelders," thus eliminating arc blow, allows our operators to increase their current to over 300 amperes with no difficulty in maintaining a steady, constant arc at all times. Increased amperage, combined with steady, uninterrupted operation, has cut our welding time about 10%.

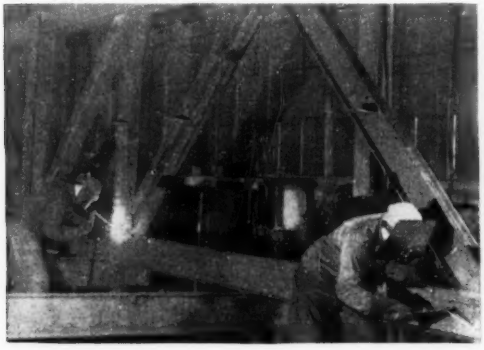

Fig. 2. *Fabricating all-welded 40-ft. jack truss for factory building framework. Top and bottom chords are 10"-21WF beams; diagonals are 8"-17WF beams. Welds are downhand, single pass, ⅜" fillets.*

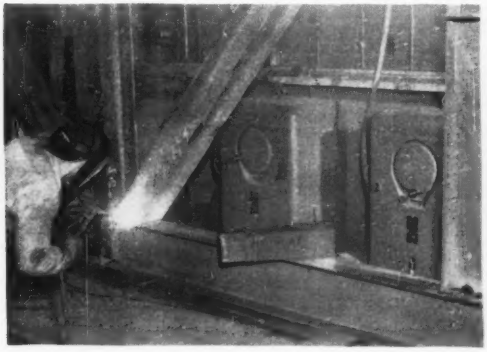

Fig. 3. *Finishing all-around welding of diagonal to bottom chord. Weld is made with single pass ¼" diameter "Fleetweld 7" electrode. Welding current is 310 amps.*

The above is published by **THE LINCOLN ELECTRIC COMPANY** *in the interests of progress.*
For further information on "Fleetwelders," write for Bul. 366. The Lincoln Electric Company, Dept.134, Cleveland 1, Ohio.

CONSTRUCTION REPORTS

Proposed Work

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 18, N. Y.
ELSIE EAVES, Manager *J. A. MAHONEY, Reports* *M. R. ROESSLER, Statistics*

WATER SUPPLY

●**Calif., Eureka** — City, City Hall, $2,000,000 bond election June 20, water sys. imprvs., over $1,000,000. Koebig & Koebig, Rowan Bldg., Los Angeles, consult. engr. CD 9/8/44—ENR 9/21/44.

Miss., Laurel—City, Carrol Gartin, mayor, City Hall, $250,000, bond election April 5, 10 mi. watermains and 500,000 gal. reservoir. CD 5/25/45—ENR 5/31/45.

N. C., Sylva—Town, Jack C. Allison, mayor, Sylva, bond election May 2, WW imprvs. $150,000. CD 12/1—ENR 1/6.

Okla., Ada—City, voted bonds, WW extens. $590,000. George Toler, Ada, consult. engr. CD 3/9.

Tex., Electra—City, T. Leo Moore, mayor, filter plant, $70,000; 10 in. c.i. pipelines, $60,000. Freese & Nichols, 410 Danciger Bldg., Fort Worth, consult. engrs.

Tex., Houston—Harris County Water Control & Imprvt. iDst. 11, c/o C. L. Henley, Greens Bayou, c/o Courthouse, Houston 6 and 8 in. watermains, $100,000; water supply well, $30,000; in Green Bayou area. Frank J. Metyko, Scanlan Bldg., consult. engr. CD 2/11—ENR 3/3.

Utah, Salt Lake City—Salt Lake City Water Dpt., c/o D. Dee Affleck, comr. of WW, City and County Bldg., 48 in. either steel or concrete main water feed line from Park Reservoir to 17 South St. $400,000-$500,000. CD 5/24/44—ENR 6/1/44.

SEWERS, WASTE DISPOSAL

Ark., Arkadelphia—City, Arkadelphia, voted bonds, sewer line extens., $185,000. CD 7/9—ENR 8/19.

Ark., Jonesboro—City, exten. sewerage sys. $100,000. CD 9/1/43—ENR 9/9/43.

●**Ark., Little Rock**—City, storm sewers. $2,-000,000. Paul Zouder, City Hall, City engr. CD 11/5/45—ENR 11/29/45.

●**Ark., North Little Rock**—City, North Little Rock, sewerage diversion proj. in Dark Hollow area, Levy Area and incl. pumping station, $1,497,000. Kenneth Lefever Gazette Bldg., Little Rock, consult. engr.

●**Ark., Pine Bluff**—City, Pine Bluff, sanitary sewer sys. extens. and imprvs., Approx. $1,000,-000. A. E. Heagler, 315 Exchange Bldg., Little Rock, consult. engr. CD 6/23/47—ENR 7/10/47.

Calif., Elsinore—City, Elsinore, sewage disposal plant, force main, lifting station, $122,000. Francis H. Bulot, 411 S. St., Los Angeles, consult. engr. and D. R. Crane, 122 Graham Ave., Elsinore, city engr.

●**Calif., Eureka** — City, City Hall, $2,000,000 bond election June 20 series of 3 sewage treatment plants, $679,000 and replacement of existing sewer lines, $133,400. Koebig & Koebig, Rowan Bldg., Los Angeles, consult. engr. CD 9/9/45—ENR 9/30/45.

Calif., Los Angeles—Los Angeles Co., Bd. Supervs., 501 Hall of Records, sanitary sewer in San Dimas Ave. and other streets, incl. 6,90 mi. 8 to 10 in. sewer pipe, San Dimas, $147,000; sanitary sewers in Norwood Pl. and other vicinity of Wilmar, incl. 3.62 mi. 8 in. vitr. clay pipe, $77,750. C. E. Arnold, co. surv. and engr.

Calif., Los Angeles — Bd. Supervs. Los Angeles Co., 501 Hall of Records, sanitary sewers in Emerson Pl., 2.9 mi. 8 in. sewers in Wilmor Dist., $63,300; sanitary sewers in Watcher St., 2 84 mi. 8 in. sewers in Bell Gardens Dist., C. I. 1245, $58,100. C. E. Arnold, co. engr. and surv.

Calif., Los Angeles—Bd. Supervs. Los Angeles Co., 501 Hall of Records, sanitary sewers in Colman Ave., Altadena, $114,100; sanitary sewers in Lotus and East Pasadena, $144,400; 170 St. Lawndale, C. I. 1296, $50,000. C. E. Arnold, co. engr. and surv.

Calif., Merced—City, City Hall, sewage disposal sys. $220,000 Harold F. Gray, 2540 Benvenue Ave., Berkeley, and G. E. Winston City Hall, engrs.

●**Calif., Santa Ana**—Orange Co. Sanitation Dists. 1, 2, 3, 5, 6, 7 and 11, 115 Church St., Santa Ana, voted $8,308,000 bonds, primary sewage treatment plant incl. mechanical sludge and scum removal, multi-stage digester, sludge drying beds, chlorinator trunk sewers ranging in size from 15 to 90 in. in diam. and an ocean outfall 78 in. diam., 7,000 ft. in length. Vinton W. Bacon, c/o owner, engr.

Colo., Golden—City, City Hall, plans by Ripple & Howe, archts and engrs., Cooper Bldg., Denver, sewage disposal plant, $200,000.

Conn., Norwalk—City, Municipal Offices, City Hall, sewage disposal plant addns. $550,000. Metcalf & Eddy, 1300 Statler Bldg., Boston, Mass., consult. engrs. CD 4/14/46—ENR 5/2/46.

Conn., Putnam—City, Mayor's Office, City Hall, sewerage sys., incl. sewer main extens. to Wheaton Farm, $200,000. Gilbert C. Perry, City Hall, city engr.

●**Ga., Atlanta**—City, incinerator addn. $1,-000,000. Robert & Co. Assoc., 96 Poplar St., consult. engr. CD 8/16/46—ENR 9/5/46.

Idaho, Lewiston—City, City Hall, sewage treatment plant, trunk sewer, $475,000. Stevens & Koon, Spaulding Bldg., Portland, Ore., consult. engrs., W. P. Hughes, city engr. CD 5/9/47—ENR 5/29/47.

Ill., Swansea (Belleville P. O.)—Village, Village Hall, sanitary sewerage sys. Approx. $100,000. James G. Cooney, First National Bank Bldg., 19A N. Illinois St., Belleville, engrs. CD 3/4—ENR 3/17.

Ky., Maysville — City, City Hall, storm sewer line, $125,000; sanitary sewer lines, $125,000. W. F. Manion, 914 Main St., Cincinnati, O., consult. engr., CD 11/25/46—ENR 12/12/46.

La., Denham Springs—City, P. T. Jones, mayor, bond election, May 17, sanitary sewer imprvs. $135,000. Barnard & Burk, Triad Bldg., Baton Rouge, consult. engar.

Mass., Lunenburg—Town, Bd. Selectmen, Town Hall, sewerage sys., treatment plant, Metcalf & Eddy, 1300 Statler Bldg., Boston, engrs.

Mass., Marblehead — Town of Marblehead, Bd. Selectmen, Town Hall, sewers and pumping station, Little Harbor, $100,000. Haley & Ward, 73 Tremont St., Boston, engrs. CD 1/22/47—ENR 2/6/47.

Minn., Mankato—City, T. Mackey, city engr., sewage disposal plant, $750,000. Toltz, King & Day, 1509 Pioneer Bldg., St. Paul, engrs.

Mo., Olivette (St. Louis, Zone 5, P. O.)—Olivette Sanitary Sewer Dist., c/o C. Willard Max, 8922 Forsyth, Clayton, St. Louis Zone 5, $80,000 bond election Apr. 5, sanitary sewerage sys. $135,825.

●**Mo., St. Louis**—City, M. M. Kinsey, pres. Bd. P. Serv., City Hall, defeated $15,000,000 bonds sewer rehabilitation and enlargement, Harlem Creek, northern part of city, and Baden and Glaise Creek Distrs. Projects indefinitely postponed. CD 2/4—ENR 2/17.

N. M., Raton—City, plans by Alfred J. Ryan, consult. engr. and archt., 1342 Glenarm Pl., Denver, Colo., sewerage treatment, primary and secondary. $200,000. CD 1/8/48—ENR 1/22/48.

N. Y., Brooklyn—President Brooklyn Boro, Boro. Hall, storm and sanitary sewers, E. 29 St. from Voorhies Ave. to Avenue Z; Nostrand Ave. from Voorhies Ave. to Avenue Z, $70,500; combined sewer, Farragut Rd. from Ralph Ave. to E. 56 St.; East 56 St. Farragut Rd. to Avenue H; Avenue H from E. 56 to Paerdegat Ave. south; Glenwood Rd. from Paerdegat Ave. south to Ralph Ave.; sanitary sewer in Ralph Ave., west side from Glenwood to Farragut Rds. $141,800.

●**N. Y., New York**—President Manhattan Boro, Municipal Bldg., Zone 7, relocating Board of Transportation ducts and cables; constructing combined sewers in westerly side 1 Ave. from E. 43 to E. 48 Sts. and E. 48 St. from 1 Ave. to new street adjacent to Franklin D. Roosevelt Dr.; sanitary sewers in new street adjacent to Franklin D. Roosevelt Dr. from E. 48 to E. 49 Sts., and through public park adjacent to Franklin D. Roosevelt Dr. from E. 41 to E. 42 Sts. at point about 100 ft. west of Franklin D. Roosevelt Dr.; storm water overflow chamber and storm water outlet sewer in E. 42 St. from point about 100 ft. west of Franklin D. Roosevelt Dr. to the bulkhead; receiving basins where necessary, etc., included in Contr. 161-C, and comprising Sect. 2 of comprehensive improvement for constructing vehicular underpass with ramp approaches, complete in Tunnel Street in and under 1 Ave. from E. 41 to E. 48 Sts., etc. $1,155,000.

N. Y., Oneonta — Town, sewerage sys., treatment plant. Approx. $170,000.

S. Y., Thompsonville—Town, sewerage sys. and treatment plant for Kiamesha Lake Sewer Dist. and for Sackett Lake Sewer Dist., $175,000 each. (**Correction**—location of project). CD 3/18.

N. C., Spindale—Town, bond election May 3, 4 mi. new lines, sewerage sys. imprvs. $150,000. CD 4/16/46.

O., Trenton — Village, Seecher Schooley, mayor, Trenton, sewage disposal plant and sys. $150,000. Ralph Woolpert Co., 360 W. 1 St., Dayton, consult. engr. CD 11/19—ENR 12/23.

Okla., West Nichols Hills (Oklahoma City P. O.)—West Nichols Hills, voted bonds sanitary sewer $130,000. Phillips & Strong, Insurance Bldg., Oklahoma City, consult. engrs.

Pa., McKeesport — City, sewage disposal plant. Approx. $500,000. T. M. Dugan, 1308 Freemont St., consult. engr. CD 10/31/45—ENR 11/29/45.

Pa., Mt. Wolf—Mt. Wolf Boro, Mt. Wolf, sewage and disposal plant. $235,000. Thomas A. Monk, Jr., 30 S. Queen St., York, consult. engr.

R. I., Cranston — City, H. W. Lark, mayor, City Hall, sewers, extens. to print works and housing projects. $600,000.

R. I., East Providence—Town, C. C. Viall, clk., Town Hall, 16 in. sewer main extens., Taunton Ave. $100,000. Waterman Eng. Co., 86 Weybosset St., Providence, engr. CD 12/1/47—ENR 12/11/47.

Tex., Alvin—City, underground sys. of drainage. $100,000. S. A. Russell, Rosenburg, consult. engr.

Tex., Carthage—City, sanitary sewerage sys. imprvs., extens. $100,000. Royce E. Wisenbaker & Assoc., 1415 N. Dixie St., consult. engrs. CD 9/28/45—ENR 10/11/45.

Tex., San Antonio—City, Henry Hein, comr., incinerator and repairing existing one, $300,-000.

Wis., Durand—City, sewage treatment plant, $200,000. S. P. Hall, 128½ Graham Ave., Eau Claire, consult. engr.

Wis., Rice Lake—City, sewage treatment plant. $350,000. Davy Eng. Co., 502 Main St., LaCrosse, consult. engr.

BRIDGES

Arkansas—State Hy. Dpt., Little Rock.

Ashley Co.—paving Montrose Overpass approaches, Montrose, $90,000.

Carroll Co.—bridge over White River, Busch, $200,000.

Crawford Co.—widening 3 bridges on Hy. 64, Alma, $105,000.

Hot Springs Co.—constructing overpass, Malvern, $341,000.

Izard Co.—bridges between Calico Rock and Brockwell on Hy. 56, Calico Rock, $135,000.

Jefferson Co.—repairing bridge across Arkansas River, Pine Bluff, $405,000.

Lawrence Co.—bridge approaches 2¼ mi. at Black Rock, $282,000; bridge across Spring River on Hy. 63, Ravendon, $222,000.

Lee Co.—4 bridges on Hy. 79 near Marianna, $234,000.

Lonoke Co.—bridges on Hy. 67 between Ward and Beebe, $175,000; bridges on Hy. 30, Humnoke, $101,000.

Miller Co.—Index Bridge approach imprvs., near Texarkana, $200,000.

Mississippi Co.—bridge and embankment on Hy. 18 S. Leadville, $600,000.

Polk Co.—bridges on Hy. 8, Mena, $164,000.

Pulaski Co.—constructing overpass in Little Rock, $570,000.

Scott Co.—bridges between Waldron and Booneville, Hy. 23, $134,000. Alfred E. Johnson, Little Rock, engr. CD 12/24/43—ENR 1/13/44.

Fla., Daytona Beach—Comrs. Volusia Co., Deland. Seabreeze steel and concrete bridge across Halifax River, $500,000.

Georgia—State Hy. Dpt., Atlanta, bridge over Savannah River on State Route 43. Approx. $100,000. Patchen & Zimmerman, Daniel Field, Augusta, consult. engrs.

Ind., Fort Wayne—Comrs. Allen Co., Court House, bridge over St. Marys River, Taylor St., $246,400, Orin M. Darling, 2615 West Dr., consult. engr.; bridge over St. Marys River, Poe, south of Fort Wayne, $105,000, N. F. Zurback, 202 Paramount St., consult. engr. CD 8/27—ENR 9/16.

Ind., Indianapolis—U. S. Engr., Federal Bldg., Louisville, Ky., and City Flood Control Bd., City Hall, rein.-con. 3 span bridge over Fall Creek, Indiana Ave. $300,000. M. G. Johnson, city engr.

Kan., Ogden—Riley Co., Manhattan, bridge, $100,000. Finney & Turnispeed, Northeast Bldg., Topeka, engrs.

Massachusetts—Commonwealth of Mass., Dpt. P. Wks., Boston.

Florida—bridge.

Great Barrington—2 bridges

Hancock—bridge

Pittsfield—bridge

Sheffield—2 bridges

Williamstown—3 bridges, $400,000. Collins Eng. Co., 31 Hartford Terrace, Springfield, and Drummey-Duffill, Inc., 80 Boylston St., Boston, engrs.

●**Pennsylvania**—Commonwealth of Pennsylvania, Harrisburg.

Armstrong and Clarion Counties — bridge over Allegheny River between Armstrong Co. and point midway between Boros of Kittanning and East Brady, Clarion Co., $1,500,000.

●**Pennsylvania**—State Hy. Dpt., Harrisburg.

Washington and Westmoreland Counties—highway bridge over Monongahela River between North Charleroi, Washington Co. and Monessen, Westmoreland Co. $2,000,000.

Tex., Beaumont — Jefferson Co., 50x350 ft. I-beam center span and 12 25 ft. concrete spans, bridge across Taylors Bayou on La Belle Rd. 15 mi. southwest of here. $300,000. Charles L. Davidson, c/o owner, engr.

Virginia—State Hy. Dpt., Richmond,

Yorktown—2,540 ft. swing span bridge across the York River, near here. Parsons, Brinckerhoff, Hogan & Macdonald, 51 Broadway, New York, N. Y., consult. engrs.

Washington — State Hy. Dpt., Olympia.

King Co. — reconstructing two Cedar River bridges on Renton—Enumclaw Hy. via Maple Valley, $295,000. O. R. Dinsmore, State Hy. Dir.

●**Washington**—State Hy. Dpt., O. R. Dinsmore, dir., Olympia.

Snohomish Co.—Everett-Union Slough bridge, $1,470,000.

(Continued on page 135)

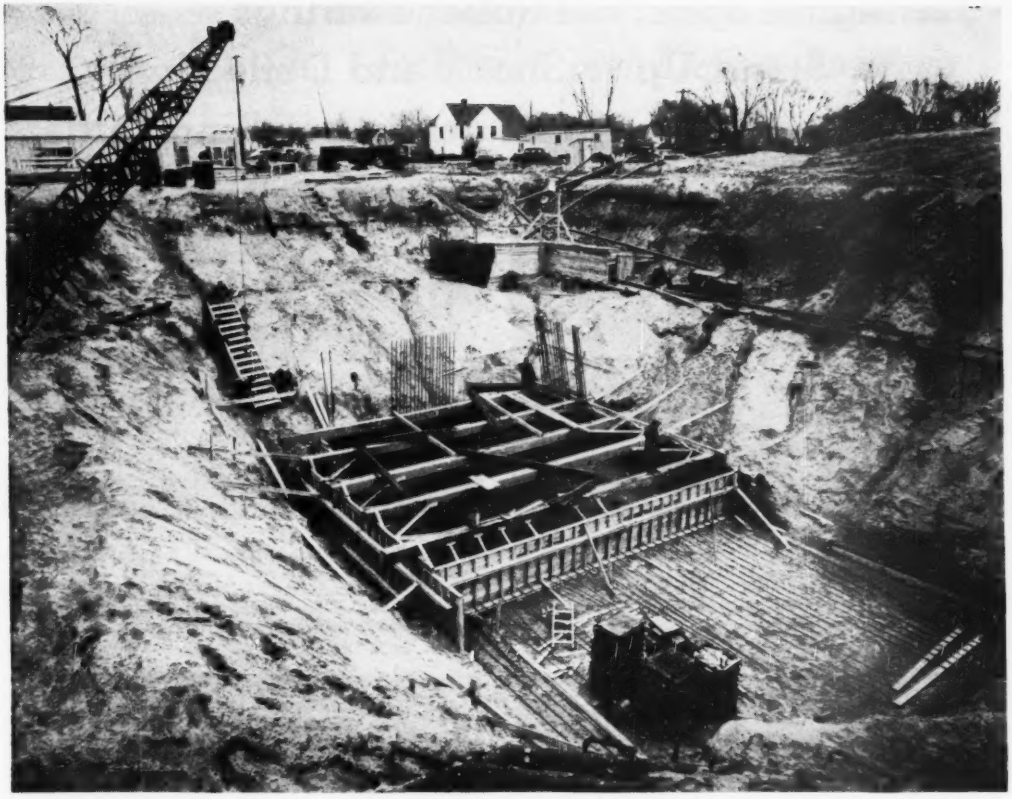

Water . . . 24 Feet of it . . .

in fine clay-lensed sand,
handled perfectly by a

MORETRENCH WELLPOINT SYSTEM

on this pumping station in Madison, Wisconsin

From past experience, La Crosse Dredging Corp., Chicago, Ill., knew that the best, most economical way to excavate this material was "in the dry" with MORETRENCH WELLPOINTS.

REPEAT ORDERS . . . the best advertising in the world!

MORETRENCH CORPORATION

90 West St.	3037 S. Christiana Ave.	7701 Interbay Blvd.	315 W. 25th St.	Rockaway
New York 6, N. Y.	Chicago 23, Illinois	Tampa 9, Florida	Houston 8, Texas	New Jersey

Torrington Spherical Roller Bearings Stand Up to Shock and Deflection In Rowe Timber King Yarders

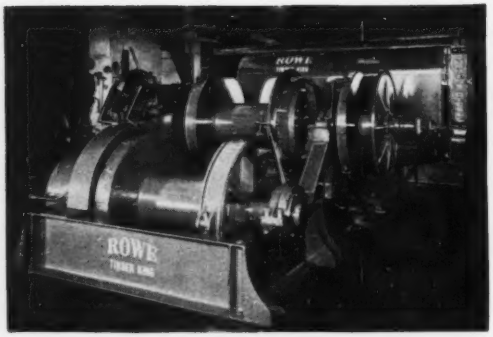

For handling heavy materials like logs, beams and pipe, Timber King Yarders have to be rugged. To back up a 32-ton line pull, and make sure each Yarder will stand up to hard usage and severe shock, Rowe Machine Works uses 6 Torrington Spherical Roller Bearings on main, haulback and strawline drums.

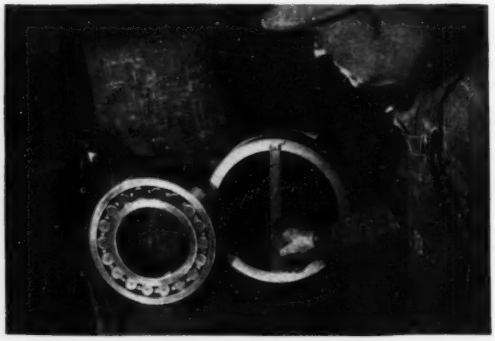

These precision bearings give the low torque that means easy starting under heavy loads, smooth running with low power consumption. When shock loads deflect drum shafts or distort yarder frames, Spherical Roller Bearings compensate automatically for misalignment, keep rolling effortlessly.

Easy handling and installation of Spherical Roller Bearings, due to their unit design, is appreciated both in assembly and servicing. Readily accessible, the bearings, reduce down time in the field. Were it necessary, two men could easily dismount and remount all six bearings in a day.

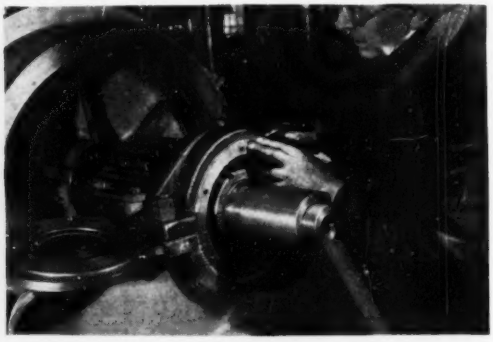

Welded construction of yarder frames would make it difficult to secure accurate alignment with rigid bearings. Spherical Roller Bearings make proper initial and running alignment a matter of course. Time is saved in assembly. Long service life is assured under the most severe operating conditions.

In equipment you build or operate, specify Torrington Spherical Roller Bearings for long service life and minimum maintenance attention. Our engineers offer their experience to help you with your friction problems. Write us today. THE TORRINGTON COMPANY, South Bend 21, Ind. or Torrington, Conn. District offices and distributors in principal cities.

TORRINGTON SPHERICAL ROLLER **BEARINGS**

Spherical Roller • Tapered Roller • Straight Roller

Needle • Ball • Needle Rollers

(Continued from page 132)

Pend Oreille Co.—bridge over Pend Oreille River at Metaline Falls, $500,000.

●**British Columbia**—Province of British Columbia, Parliament Bldgs., Victoria.

Abbotsford, Chilliwack Electoral Dist.—bridge bypass of highway, $120,000.

Boundary Creek, Grand Forks Electoral Dist.—3 bridges, $100,000.

Britannia Creek, Lillooet Electoral Dist.—bridge, $60,000.

Bush River, 245, Columbia Electoral Dist.—bridge, $100,000.

Chemainus River, Cowichan-Newcastle Electoral Dist.—bridge, $200,000.

Clearwater River, 55, Kamloops Electoral Dist.—bridge, $50,000.

Cook Creek, North 28, Comox Electoral Dist.—bridge, $50,000.

Coquitlam River, Dewdney Electoral Dist.—bridge, $250,000.

Courtenay Slough, Comox Electoral Dist.—bridge, $50,000.

Cowichan River, Cowichan-Newcastle Electoral Dist.—bridge, $200,000.

Diamond Crossong, 27, Cowichan-Newcastle Electoral Dist.—bridge, $215,000.

Duncan Waggon, 30, Cowichan-Newcastle Electoral Dist.—bridge, $100,000.

Garvin Creek, Prince George Electoral Dist.—bridge, $70,000.

Goat River, Nelson-Creston Electoral Dist.—bridge, $175,000.

Ioco Dedwney Electoral Dist.—bridge, over highway, $80,000.

Little Sand Creek, 70, Fernie Electoral Dist.—bridge, $50,000.

Loope 13, Fernie Electoral Dist.—bridge, $115,000.

Marshall Creek 6 and 27, Chilliwack Electoral Dist.—bridge, $75,000.

Michel Mouth 9, Fernie Electoral Dist.—bridge, $115,000.

Mill Stream, Esquimalt Electoral Dist.—bridge, $100,000.

Mission Creek, South Okanagan Electoral Dist.—bridge, $50,000.

Niagara Canyon, Esquimalt Electoral Dist.—bridge, $100,000.

Old Town, 10, Fernie Electoral Dist.—bridge, $115,000.

Osoyoos Lake, Similkameen Electoral Dist.—bridge, $60,000.

Porphyry Creek 83, Skeena Electoral Dist.—bridge, $50,000.

Revelstoke—bridge over Canadian Pacific Railway tracks, $60,000.

River Bend, Alverni Electoral Dist.—bridge, $50,000.

Rosewall 135, Comox Electoral Dist.—bridge, $50,000.

Sandstone Creek 58, Esquimalt Electoral Dist.—bridge, $115,000.

Stave River, 99, Dewdney Electoral Dist.—bridge, $250,000.

Vedder Canal, Chilliwack Electoral Dist.—bridge, $350,000. CD 3/1/43—ENR 3/4/43.

Ontario—Province of Ontario, Toronto.

Cochrane—two 77 ft. span, cantilever wing walls, bridge over Muskego River, $150,000.

5 span 508 ft. steel deck truss bridge over Frederickhouse River, $150,000.

Quebec—Province of Quebec, Dpt. Mines, Quebec City.

Roberval — bridge over Chamouchouane River, Danault Twp., on road to mines towards Lake Chibougamu, $160,000.

St. Etianne de Lauzon—bridge over Beaurivage River.

St. Julienne de Rawdon—bridge over St. Esprit River, $50,000.

Val d'Or — bridge over Dagenois River, $75,000.

STREETS AND ROADS

●**Ariz., Globe**— City, wid'n. Hys. 60 and 70 through city center replacing of Broadway bridge and railroad underpass. $1,000,000. W. C. Lefebvre, 17 Ave. and Jackson St., Phoenix, engr. CD 2/1/46—ENR 2/21/46.

●**Arkansas**—State Hy. Dpt., Little Rock.

Ashley Co.—paving 6.4 mi. Hy. 165, Montrose, $271,000.

work 12 mi. on Hy. 82, Montrose, $721,000.

Baxter Co.—paving 9 mi. Hy. 5, Mountain Home, $90,000.

Benton Co.—paving 5 mi. Hy. 100, Bentonville, $275,000.

Boone Co.—paving 11 mi. Hy. 7, Harrison, $400,000.

Calhoun Co.—paving 11 mi. Hy. 4, between Harrell and Banks, Harrell, $525,000.

Carroll Co.—paving 5 mi. Hy. 103, Green Forest, $100,000.

paving 5 mi. Hy. 21, Berryville, $100,000.

Clark Co.—paving 11.5 mi. on Hy. 7, Arkadelphia, $345,000.

reconstructing 11 mi. Hy. 67, Gurdon, $700,000.

Clay Co.—paving 7.3 mi. Hy. 90, Rector, $146,000.

Cleburne Co.—paving 12.3 mi. Hy. 16, Heber Springs, $250,000.

Cleveland Co.—paving 6.2 mi. Hy. 97, Kingsland, $125,000.

Columbia Co.—paving 16 mi. Hy. 82, Magnolia, $600,000.

paving 8 mi. on Hy. 19, Magnolia, $237,000.

Conway Co.—paving 19 mi. Hy. 9, Solgoholia, $430,000.

Craighead Co.—paving 7.6 mi. Hy. 143, Black Oak, $300,000.

Crawford Co.—wid'n. paving 7 mi. Hy. 64, Alma, $450,000.

wid'n. Van Buren City Connection Hy. 59, Van Buren, $110,000.

Macomber Makes It So Darned Easy To Design and Erect a Building

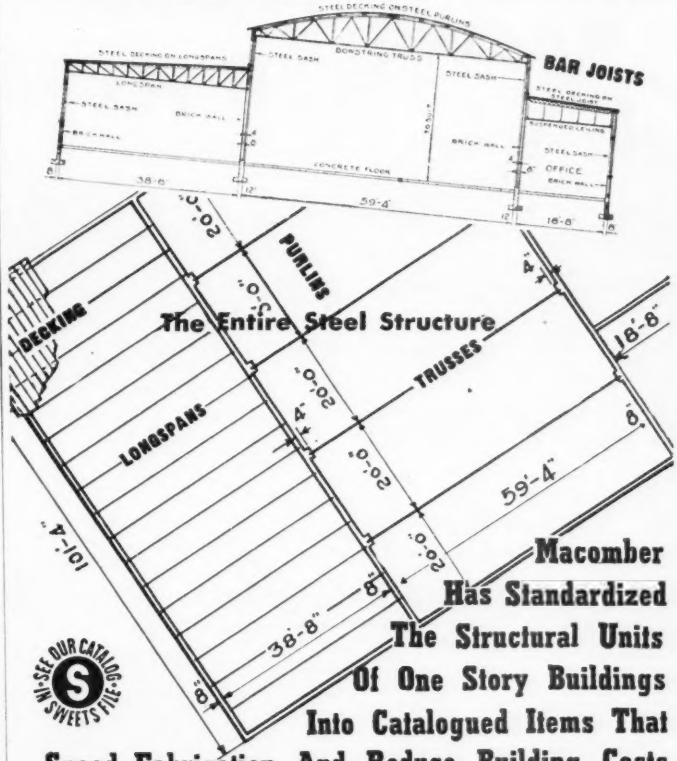

Macomber Has Standardized The Structural Units Of One Story Buildings Into Catalogued Items That Speed Fabrication And Reduce Building Costs

Costly delays are avoided

MACOMBER

can help you complete your jobs faster with Factory-Made structural load bearing units.

← *Send for your copy* →

Forward drawings for quotation and delivery estimates.

V-BAR JOISTS AND PURLINS • V-STUDS • TRUSSES • LONGSPANS • DECKING

MACOMBER
INCORPORATED
CANTON, OHIO

IN MEXICO D. F.—MACOMBER DE MEXICO S.A. CEDRO 500

STANDARDIZED STEEL BUILDING PRODUCTS

IT'S SPEED

In DOG RACING

In PILE DRIVING

It's SUPER-VULCAN OPEN TYPE DIFFERENTIAL-ACTING PILE HAMMERS 18C, 30C, 50C and 80C

Super-Vulcan drives 'em down fast with double the number of smashing blows per minute, more penetration of each pile per blow, a saving of one-fourth to one-third the steam. Positive action on all types of piles.

Marked economy comes through the Super-Vulcan's fast action, through simple design, rugged strength and durability for minimum maintenance costs. The open type fits the same leads and uses the same accessories as the Warrington-Vulcan Single Acting Pile Hammer. Write for complete detail.

Sizes 18C—30C—50C—80C meet all needs

VULCAN IRON WORKS Since 1852

331 North Bell Avenue

Chicago 12 ---Illinois

paving 10 mi. Hy. 59, Cedarville, **$600,000.**

Crittenden Co.—paving 5 mi. Hy. 61, West Memphis, **$350,000.**

Drew Co.—paving 12 mi. Hy. 4, Monticello, **$100,000.**

Faulkner Co.—paving 13 mi. Hy. 25, Greenbrier, **$210,000.**
paving 20 mi. Hy. 64, Conway, **$403,000.**
paving 3 mi. Hy. 64, Conway, **$225,000.**

Fulton Co.—imprv. 10 mi. Hy. 63, Mammoth Springs, **$466,000.**
paving 10 mi. Hy. 5 from Salem to Izard Co. line, Salem, **$250,000.**

Garland Co.—paving 10 mi. Hy. 9, Hot Springs, **$250,000.**

Hempstead Co.—pavement reconstr. 12 mi. Hy. 67, Hope, **$720,000.**
paving 7 mi. Hy. 4, Hope, **$185,000.**

Howard Co.—paving 6.2 mi. Hy. 4, Nashville, **$215,000.**
paving 10 mi. Hy. 70, Nashville, **$350,000.**

Izard Co.—paving 4 mi. Hy. 56, Calcio, **$157,000.**
paving 7 mi. Hy. 9, Melbourne, **$175,000.**

Jefferson Co.—paving 10 mi. Hy. 88, Altheimer, **$250,000.**
paving 10.5 mi. Hy. 15, Pine Bluff, **$315,000.**
paving 8.8 mi. Hy. 270, Pine Bluff, **$308,000.**

Lafayette Co.—paving 10 mi. Hy. 29, Lewisville, **$225,000.**

Lawrence Co.—paving 3/10 mi. Hoxie Connection Hy. 63, Hoxie, **$46,000.**

Logan Co.—paving 9½ mi. Hy. 23, Booneville, **$190,000.**

Lonoke Co.—paving 10 mi. Hy. 30, England, **$400,000.**

Miller Co.—wid'n. Hy. 82, through Texarkana, **$286,000.**

Mississippi Co.—paving 4½ mi. Hy. 18 S, Leachville, **$160,000.**
paving 13.7 mi. Hy. 14, Wilson, **$525,000.**

Monroe Co.—paving 8½ mi. Hy. 79, Clarendon, **$321,000.**
paving 7.3 mi. Hy. 86, Holly Grove, **$275,000.**
paving 7 mi. Hy. 17, Holly Grove, **$240,000.**

Nevada Co.—paving 8.3 mi. Hy. 24, Prescott, **$200,000.**

Phillips Co.—Paving 10 mi. Hy. 20, Marvell, **$466,000,** work 10 mi. on Hy. 44, Elaine, **$125,000.**

Pointsett Co.—paving 18 mi. Hy. 14, Harrisburg, **$660,000,** paving 9 mi. Hy. 63, Marked Tree, **$550,000.**

Polk Co.—paving 13 mi. Hy. 28, Mena, **$156,000.**

Pope Co.—paving 4 mi. Hy. 7, Russellville, **$160,000.**
paving 5.7 mi. Hy. 7, Dover, **$207,000.**

Pulaski Co.—resurf., parts of Hys. 65, 67 and 70, Little Rock, **$206,000.**

Randolph Co.—paving 1.2 mi. Hys. 62 and 67, Pocahontas, **$90,000.**

Sharp Co.—paving 10 mi. Hy. 11, Cave City, **$300,000.**

Stone Co.—paving 10 mi. Hy. 14, Mountain View, **$250,000.**

St. Francis Co.—imprv. 15.1 mi. Hy. 60, Forrest City, **$530,000.**

Taylor Co.—paving 12 mi. Hy. 132 Magnola, **$360,000.**

Union Co.—paving 5 mi. Hy. 15, Three Creeks, **$65,000.**

Washington Co.—paving 13 mi. Hy. 45, Goshen, **$150,000.**
short pavement of connection of Fayetteville, **$135,000.**
paving 7 mi. Hy. 68, Spring Valley, **$340,000.**

White Co.—paving 7.3 mi. connections on Hy. 67, Searcy, **$386,000.**

Yell Co.—paving 9 mi. Hy. 60, Plainview, **$135,000.**
paving 7 mi. Hy. 28, Rover, **$150,000.** Alfred E. Johnson, Little Rock, engr. CD 11/14/45—ENR 11/29/45.

●**Ark., Little Rock** — City, repairing streets over 10 year period, **$1,000,000.** Paul Zouder, City Hall, city engr.

Calif., Los Angeles—Los Angeles Bd. Supervs., 501 Hall of Records, imprv. Western Ave. from 182 St. to Torrance City Limits, over **$100,000.** C. E. Arnold, co. surv. and engr. CD 1/15/45—ENR 1/25/45.

†**Colorado**—Pub. Rds. Admin., 254 New Customhouse Bldg., Denver,

Delta and Mesa Counties—grading, base 4 mi. Cedar dge and Mesa, Colo. Forest Proj. 13-A.

Douglas Co.—bit. 5.6 mi. Jarre Canyon, Colo. Forest Proj. 50-F-3, H-4.

Grand Co.—bit. 10.8 mi. south of Rand, Willow Creek, Colo. Forest Proj. 24-A-3, E-1, F-1.

Larimer Co.—bit. 2.2 mi. Rocky Mountain National Park, near Estes Park, Fall River Rd. Park Proj. 1-D-2.

Montezuma Co.—grading, base course 4.2 mi. Dolores-Rico, Colo. Forest Proj. 1-E, E-1.

Pueblo Co.—grading 3.9 mi. Greenhorn Hy., Colo. Forest Proj. 35-E.

Summit Co.—grading 7 mi. Loveland Pass to Fremont Pass, Colo. Forest Proj. 33-A-1, A-2, all foregoing approx. **$50,000** each. W. B. Matteson, div. engr. CD 10/16/46—ENR 12/31/46.

Colo., Denver—City and Denver Co., City and County Bldg., Denver, street imprv., Dist. 163, incl. concrete gutter, curb and curb walk, 3 in. gravel base course and necessary incidental imprvs. **$224,220.** Terry Owens, city engr.

Conn., Hartford — City Street Dpt., Municipal Bldg., 550 Main St., resurfacing streets incl. Park St. from Orange St. to City Line; Washington St. from Vernon to Webster St.; New Britain Ave. from Zion St. to Newington Ave.; Franklin Ave. from Brown St. to City

(Continued on page 139)

"BERG"
CONCRETE SURFACER
MODEL A

"Berg" equipment is used extensively for surfacing and finishing applications on concrete construction.

The many "BERG" Models available, permit exact selection for your particular application.

The distinctive "BERG" features give you the kind of results that are realized in better quality work, combined with lower costs.

"BERG" Heads and Attachments are interchangeable, thereby providing adaptability for vibrating, wire brushing, sanding and polishing applications.

THE CONCRETE SURFACING MACHINERY CO.
4667 SPRING GROVE AVE.
CINCINNATI 32, OHIO

GRIFFIN

GRIFFIN

WELLPOINT SYSTEMS
—
JETTING PUMPS
—
Distributors
GRIFFIN ENGINEERING CORP.
2016 E. Adams St.,
JACKSONVILLE, FLA.
—
GRIFFIN EQUIPMENT CO., INC.
548 Indiana Street,
HAMMOND, INDIANA

GRIFFIN WELLPOINT CORP.
881 EAST 141st ST. • NEW YORK 54 N. Y.
Phones: MElrose 5-7704-5-6

Built for Long Life
IN TOUGH SERVICE

Typical of GMCs used in construction work is this tandem axle gasoline tractor which moves heavy rock-crushing equipment for an Iowa contractor. GMC heavy duties are offered in gasoline models of four different engine sizes and Diesels of four- and six-cylinder design, in weight ratings from 19,000 to 90,000 pounds.

GMC heavy duty gasoline and Diesel trucks are preferred by operators who haul heavy loads in tough, rugged going. Why? Because GMC heavy duties have engines, axles, clutches, transmissions, springs, frames and brakes specifically designed to move big loads . . . and to move them more dependably, for more miles, at low per-mile cost.

GMC heavy duty trucks are the product of the world's largest exclusive producer of commercial vehicles. They are sold and serviced by a nation-wide organization of truck transport experts. If you're in need of new heavy hauling equipment, let your nearest GMC specialist aid you in selection of a GMC exactly suited to your job.

GMC
TRUCKS
The Key to Greater Truck Value
GASOLINE · DIESEL

GMC TRUCK & COACH DIVISION • GENERAL MOTORS CORPORATION

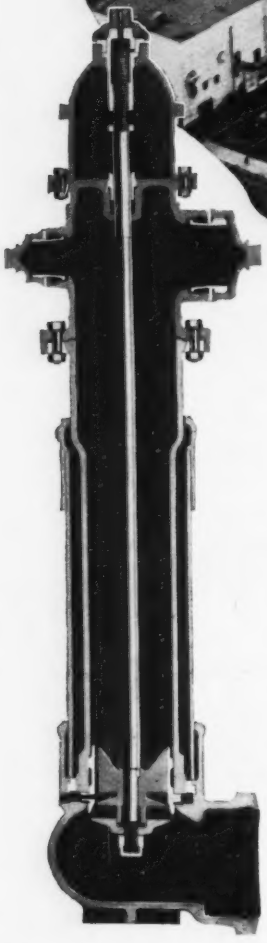

MERCED, CALIF.

"One of America's Safest Cities"
THE MATHEWS FIREMEN SAY

THEY FIGURE IT OUT THIS WAY: Merced, California is protected by Mathews Modernized Hydrants, and wherever these hydrants are, *there* is safety plus.

Some Mathews in service today started their long and trouble-free life even before there was a seedless orange in the state of California. This *proved* dependability, plus the most modern features, makes today's version of the time-honored Mathews a standard by which all hydrants are judged. The thread is proof against rusting and deposits of silt. The revolving nut is protected against rain and wind-borne dust. The main valve is true compression-type; the drain valve drains perfectly dry. All working parts are contained in a removable barrel—easily and quickly replaced when every second can count.

Send for descriptive literature. Read for yourself, point by point, why there are over 500,000 Mathews in service today, and why you owe it to your community to provide this safety plus.

OTHER MATHEWS FEATURES: Head can be rotated 360° • Replaceable head—nozzle outlets easily changed • Nozzle levels raised or lowered—no excavating • Stuffing box cast integral with nozzle section • Only one part to lubricate—operating thread • A modern barrel makes even the oldest Mathews new

MATHEWS HYDRANTS

***Made by* R. D. WOOD COMPANY**

Public Ledger Bldg., Independence Square, Philadelphia 5, Pa.

Manufacturers of "Sand-Spun" Pipe (centrifugally cast in sand molds) and R. D. Wood Gate Valves

(Continued from page 136)

Line, Trumbull St. and adjacent sections, **$152,800**; rebuilding streets about 6 mi., incl. 2,600 ft. on Fern St., 975 ft. John St.; 5,100 ft. on Cornwall St.; 1,600 ft. Shultas Pl.; 1,550 ft. Lafayette St.; 2,900 ft. Hillside Ave.; 4,000 ft. Westland St.; 3,400 ft. Park Terrace; 1,320 ft. Bartholomew Ave.; 975 ft. Mather St.; 5,000 ft. Flatbush Ave.; 3,300 ft. Prospect Ave., **$325,000**. H. Irving Skilton, Engrg. Dpt.

●**Ill., Chicago** — City, City Hall, c. conc. or asph. on c. conc., sidewalks, lighting, curbing, drainage, 4,300 ft. Montrose Ave. from N. Clark to N. Clarendon Sts., **$286,000**; 5,600 ft. E. and W. 31 St. from S. Wentworth Ave. to S. Lake Park Av., **$428,000**; 1 mi. 59 St. from S. Ashland to S. Halsted Sts., **$459,000**; 2,600 ft. W. Montrose St. from N. Western to N. Damen Aves., **$140,000**; 2,700 ft. 103 St. from S. Racine to S. Halsted Sts., **$245,000**. CD 4/26/45—ENR 5/17/45.

Ill., Chicago—P. Wks. Comn., City Hall, c. conc.—c. conc. or asphl., 9,200 ft. S. Halsted St. between Pershing Rd. and S. Branch Chicago River, 51 ft. wide, incl. street lighting, sidewalks, curbing, etc., **$581,214**; c. conc. —c. conc. or asphl. 5,300 ft. W. Montrose Ave., between Kedzie to Pulaski Rd., 42 ft. wide, incl. street lighting, sidewalks, curbing, etc., **$288,610**. CD 4/25/45—ENR 5/3/45.

Ill., Grayville—City, c/o City Council, voted $63,000 bonds, blacktopping, imprv. various streets. **$157,000.**

La., Cameron — Cameron Parish, Cameron, voted **$300,000** bonds, Mar. 16. Gulfcoast shortline Hy. between Port Arthur, Tex. and Vermillion Parish, La., CD 5/7/47—ENR 5/29/47.

Neb., Lincoln—City, City Hall, bond election May 3, repaving, wid'n streets. **$500,000.** D. L. Erickson, city engr. CD 1/17/45—ENR 2/8/45.

Neb., Omaha — City, City Hall, rebuilding Railroad Ave. from 24 and O St. to Sarpy County line. **$450,000.** E. W. Woodbridge, city engr. CD 1/26.

●**New York**—Dpt. Pub. Wks., Bertram D. Tallamy, Supt., Albany.

Jefferson Co.—13.85 mi. arterial highway system for Watertown, Downtown Inner Loop, divided highway having 2 travel lanes in each direction, encompassing areas now bounded by Sterling, Clinton, Sherman, West Lynde, Bridge and Mechanic Sts., incl. Bridge over Black River and underpasses at Factory and Olive Sts., traffic interchange facilities provided near present junction of Court, Coffeen and S. Massey Sts. West Main Street Route, reconstructing W. Main St. from proposed inner loop to city line, 4 travel lanes and 2 parking lanes and an underpass constructed at West Main St. railroad grade crossing; Bradley Street Route, reconstructing Bradley Street from West Main St. to city line with 2 travel lanes, 2 parking lanes, curbs and sidewalks; Leray Blvd., constructing 2 lane Hy. on new location parallel to and west of present Leray St. from proposed interchange at northerly end of Court Street Bridge to new connection with Route 11; Water Street Route, 1.7 mi. route, partially on new location from proposed inner loop connecting with Route 3 at city line; State and Gifford Street Route; reconstruct State and Gifford Sts. over present alignments; Arsenal Street Route, reconstructing Arsenal St. from the inner loop westerly to city line; 2 travel and 2 parking lanes and new viaduct over New York Central R. R. tracks; Massey-Ives Street Route, extending from Court Street Bridge, via Massey and Ives Sts. to junction with Route 11 near Circle Inn. **$6,438,100.**

Tompkins Co.—7.95 mi. arterial route system for city of Ithaca, Dryden Rd., Ithaca Rd. and East State St. (Route 13) between east city line and Aurora St. widened to provide 4 travel lanes; developing 3 lane, one-way thoroughfare for westbound traffic only from point on East State St. about 500 ft. east of Aurora St. to connect with Seneca St.; extens. ft. Green St. from N. Tioga St. easterly, passing under Aurora St. connecting with Route 13, consisting of 3 lane for eastbound traffic; 44 ft. pavement on Seneca St. between Meadow and Aurora Sts.; Incorporate Green St. from Meadow St. easterly to proposed new junction with Route 13 into the St. Hy. Sys. as an eastbound thoroughfare; relocate Route 96 by constructing two 24 ft. roadways divided by mall from point near Bundy Rd. north of the city line to Meadow St.; construct grade separation structure over the Lehigh Valley R. R. tracks, bridge over Cayuga Inlet and new connections to Taughannock Blvd.; reconstructing Meadow St., from Cascadilla St. southerly to connection with Routes 13 and 34, incl. bridge over Six Mile Creek; construct 44 ft. pavement on Cayuga St. from Tompkins St. southerly to Spencer St., incl. bridge over Six Mile Creek; two 30 ft. roadways, separated by mall on Cayuga St. from Tompkins St. northerly to north city line, new bridge over Fall Creek; new intersection with Lake St. and Route 34 north of the city line; construct Spencer St. from Cayuga to Albany Sts. with pavement flanked by two 10 ft. shoulders from Albany St. to south city line; inclusion of Hancock St. into the St. Hy. Sys. Est. **$3,896,000.**

R. I., Warren — State Hy. Dpt., Providence, resurf., wid'n. approx. 11,600 ft. Main St. from Long Crossing to Warren Bridge. **$200,000.**

R. I., Warwick — State Hy. Dpt., Providence, approx. 1,400 ft. by-pass from Post Rd. to Greenwich Ave. **$120,000.**

●**South Dakota**—State Hy. Comn., Pierre,

(Continued on page 141)

MASTER COST-SAVING EQUIPMENT—FOR IMMEDIATE DELIVERY

Gas or Electric Concrete Vibrators (Catalog No. 689)

Hand Tools for operating from all Master Vibrators and BIG-3 (Catalog No. 683)

BIG-3 for Generation, Tool Operation and Concrete Vibration (Catalog No. 687)

Portable Gas-Electric Generator Plants. Sizes 500 to 17000 Watts (Catalog No. 594)

General Purpose Floodlights

"Power-Blow" Electric Hammer and Spade (Catalog No. 688)

Gas or Electric Back-Fill Tampers (Catalog No. 699)

Vibratory Concrete Finishing Screed. Sizes 6' to 36' (Catalog No. 596)

"Turn-A-Trowel" for trowelling concrete Sizes 48" or 34" (Catalog No. 685)

Send for illustrated catalog on any item to

MASTER VIBRATOR COMPANY

DAYTON 1, OHIO

PLYMOUTH LOCOMOTIVES FIRST

TO BE RECOMMENDED BY MEN WHO KNOW

BECAUSE PLYMOUTH LOCOMOTIVES ARE:

Built Right; Built Well

Economical To Use; Economical To Maintain

Dependable In Performance; Performance Proved

Operative Under Many Conditions; Adaptable to YOUR Operations

FOR COMPLETE DETAILS WRITE TODAY

PLYMOUTH LOCOMOTIVE WORKS

DEPT. A-4 PLYMOUTH, OHIO

NO-OX-ID Protection against Corrosion

Cuts Maintenance Cost . . . Saves Finished Water

NO-OX-ID coatings . . . tough, resilient, and dense . . . give excellent performance on *concrete* as well as metal structures.

Applied to large concrete basins, NO-OX-ID prevents leakage of costly finished water through joints and cracks. It stops cavitation and spalling. NO-OX-ID can be applied over the entire surface or local areas of seepage.

NO-OX-ID maintains film thickness and firm bond in extreme weather conditions . . . no cracking in cold weather or flowing in hot weather. Special application methods assure a smooth surface, allowing the film to penetrate surface pores to give complete waterproofing protection.

Send for details about NO-OX-ID for old basins, or as a finishing coat on new basins.



• Used as a pipe coating or lining, NO-OX-ID prevents tuberculation and corrosion.



• Valve parts can be rust-proofed with NO-OX-ID. View shows "before-and-after" application.

NO-OX-ID IRON OXIDE PAINT

Dearborn
Reg U.S. Pat Off

THE LEADER IN RUST PREVENTIVES AND BOILER WATER TREATMENT

DEARBORN CHEMICAL COMPANY

310 S. Michigan Ave., Chicago 4 • 807-15 Mateo St., Los Angeles
205 E. 42nd St., New York • 2454 Dundas St., West, Toronto

Tri-Lok RECTANGULAR OPEN STEEL FLOORING


OPENINGS SMALL ENOUGH TO PREVENT PASSAGE OF BOLTS OR NUTS WITH A ½" DIA.
MAXIMUM OPENINGS ALLOW UNINTERRUPTED PASSAGE OF LIGHT AND VENTILATION

Tri-Lok strength is obtained by truss action through twisted cross-bar, curved in opposite directions at each bearing-bar. Standard openings in Tri-Lok Rectangular Steel Flooring are 1" x 3⅞"—other size openings can be supplied as required.

Diagonal, or Super-Safety U-type Flooring, and stair treads of all types, are available. Bulletin KC 1140 describes the construction features of Tri-Lok Open Steel Flooring.

DRAVO CORPORATION

National Distributor for the Tri-Lok Company

Dravo Bldg., Pittsburgh 22, Pa.

Sales Representatives in Principal Cities

DRAVO

ATLAS CONCRETE FORMS

WALLS • CYLINDERS • FLOORS • SEWERS

Irvington
FORM & TANK CORP.
Irvington, N. Y.

(Continued from page 139)

Federal Aid Highways for 1949.

Beadle Co.—bit. 12.5 mi. U.S. 281 from U.S. 14 to North County Line.

Bennett Co.—bit. 7 mi. U.S. 18 from Martin west.

Brookings Co.—bit. 14.5 mi. U.S. 77 from Brookings to North County line.

Campbell Co.—bit. 7.9 mi. U.S. 83 from Herreid to Mound City.

Charles Mix Co.—base course, Class A surf. 4.3 mi. U.S. 281 from Platte north to Junction with S.T. 50.

Charles Mix and Brule Counties—base course, Class A surf. 5.1 mi. U.S. 281 from Junction with S.T. 50 North.

Codington and Grant Counties—bit. 9 mi. U.S. 81 from 1 mi. north of Codington Co. line south.

Corson Co.—base course, Class A surf. 9 mi. U.S. 12 from Watauga west.

Faulk Co.—service gravel 10.1 mi. U.S. 212 from Burkmere to Seneca.

base course, Class A surf. 7.2 mi. U.S. 212 from Burkmere East.

Faulk and Potter Counties—service gravel 22.1 mi. U.S. 212 from Gettysburg to Seneca.

Grant and Roberts Counties—bit. 10.6 mi. U.S. 81 from U.S. 12 south.

Gregory Co.—bit. 13.1 mi. U.S. 18 from West county line to Burke.

bit. 6.2 mi. U.S. 18 from Burke to Herrick.

Hutchinson Co.—base course, Class A. surf. 8.9 mi. St. 37 from Parkston to U.S. Hy. 18.

Marshall Co.—bit. 12 mi. St. 10 from Britton easterly.

Minnehaha Co.—c. conc. 9.6 mi. St. 38 from Hartford East.

grading, service gravel 7.1 mi. St. 19 from Humboldt to U.S. Hy. 16.

bit. 14.3 mi. St. 19 from North County Line to St. Hy. 38.

Perkins Co.—base course, Class A surf. 10.7 mi. U.S. 12 from Lemmon to North Dakota State Line.

Shannon Co.—base course, Class A surf. 3.3 mi. St. 75 from Nebraska State Line north.

base course and Class A surf. 8.2 mi. U.S. 18 from East County Line westerly.

Jackson Co.—grading, service gravel 9 mi. U.S. 16 from East County Line to East of Belvidere.

Jones Co.—grading, service gravel 15.8 mi. U.S. 16 from West County Line to west of Murdo.

base course and Class A surf. 10.8 mi. U.S. 16 from Draper to West of Murdo. Approx. **$4,670,906.**

Federal Aid Secondary Highways on State Trunk System

Aurora Co.—base course, Class A surf. 6.8 mi. St. 41 from South County Line to Stickney.

base course and Class A surf. 8.2 mi. St. 41 from Stickney to U.S. Hy. 16.

Deuel and Hamlin Counties—base course, Class A surf. 6.1 mi. St. 28 from Estelline to U.S. Hy. 77.

Douglas Co.—base course, Class A surf. 5.4 mi. St. 41 from Corsica to North County Line.

Harding Co.—grading, grav. 8.2 mi. St. 8 from U. S. Hy. 85 East.

Lincoln Co.—grading, service gravel 1 mi. St. 17 and St. 44 from Lennox south.

grading, service gravel 5 mi. St. 17 from 1 mi. south of Lennox to U.S. Hy. 18.

Minnehaha Co.—grading, base course 3 mi. St. 11 from Garretson East 3 mi.

one structure St. 11 near Corson.

c. conc. 2.9 mi. Co. Rd. from northwest corner of Sect. 31-102-49 Northwest of Sioux Falls to U. S. Hy. 77.

Pennington Co.—grading, service gravel 7 mi. St. 40 from Rapid City to Airport.

base course and Class A surf. 7 mi. St. 40 Rapid City to the Airport.

Perkins Co.—base course, Class A surf. 10.8 mi. St. 73 from U.S. Hy. 12 South.

gravel surf. 14.8 mi. St. 73 from St. 8 South.

gravel surf. 8.5 mi. St. 8 and 73 from East of Meadow South.

Turner, Lincoln, Clay and Union Counties—base course, Class A surf. 8.9 mi. St. 46 from Bereford to St. 19.

Turner and Clay Counties—service gravel 4 mi. St. 46 from Irene East.

service gravel 6 mi. St. 46 from St. 19 West. Approx. **$1,608,092.**

Programmed Prior to 1949. Remain To Be Let To Contract

Brule Co.—service gravel 14 mi. U.S. 281 from U.S. 16 south.

Clark and Hamlin Counties—service gravel 21 mi. St. 28 from St. 25 to U.S. 81.

Codington Co.—service gravel 12 mi. St. 20 from Florence South.

Custer and Pennington Counties—base course 7.2 mi. U.S. 85 from Custer North.

Dewey Co.—bit. 12 mi. U.S. 212 from Ridgeview Westerly.

Hamlin Co.—service gravel 12.4 mi. St. 28 from Estelline to U.S. 81.

Hughes Co.—service gravel 11.9 mi. St. 34 from DeGrey easterly.

Jackson Co.—grading 3 mi. St. 40 from Badlands National Park North.

Lawrence Co.—bit. 10.9 mi. U.S. 14 from Wyoming State Line to Spearfish.

McPherson Co.—base course 3 mi. St. 10 from Leola West.

base course 5 mi. St. 10 from Eureka East.

base course 4 mi. St. 10 from West of Leola West.

Marshall Co.—service gravel 15.4 mi. St. 10 from East County Line West.

Meade Co.—base course 10.2 mi. U.S. 212 from Faith West.

Minnehaha and Lincoln Counties — base

CLECO CHIPPING HAMMERS

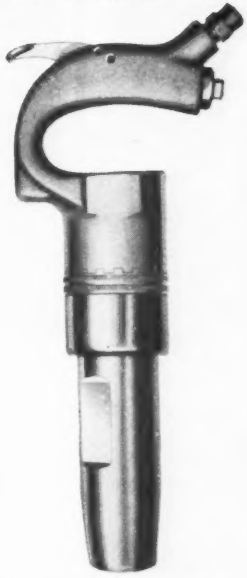

● . . . a size and a style for every chipping, calking, beading or scaling requirement.

Features Include:
- FAST, POWERFUL ACTION
- PRECISION CONTROL
- LONG LIFE
- LOW MAINTENANCE
- LOW AIR CONSUMPTION

Write for Bulletin No 75B

Call Your Cleco Man for:

Grinders — Sanders — Rotary Drills — Riveters — Sand Rammers — Chippers — Scaling Tools — Impact Wrenches — Screwdrivers — Hose Fittings — Sump Pumps.

CLECO DIVISION
of the REED ROLLER BIT COMPANY
P. O. Box 2119 Houston, Texas, U.S.A.

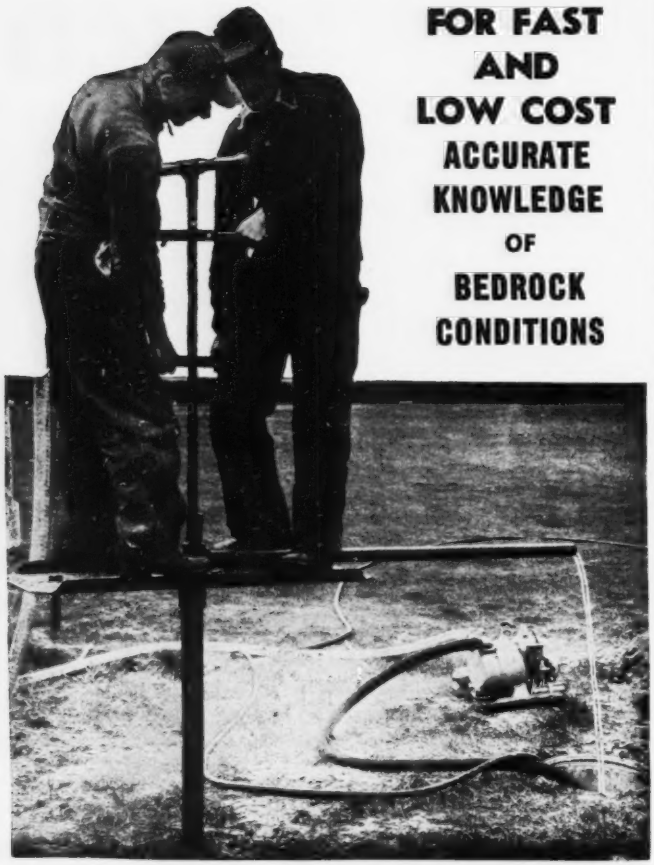

FOR FAST AND LOW COST ACCURATE KNOWLEDGE OF BEDROCK CONDITIONS

Empire **HYDRAULIC TESTING DRILL**

When you drill to bedrock you want to know your subsurface conditions—but at LOW COST. Here is the rig that you can transport and set up easily and economically in rough country, with a couple of men if necessary. Designed especially for this class of work. Extensively used by U. S. and State Governments and many others. Extremely strong and simple.

•Easy to transport, setup, take down

JUST THE DRILL FOR ROUGH COUNTRY

Outfit weighs only a total of 800 lbs. for 50 ft. drilling depths. Gives accurate samples of materials drilled. Every part can be handled by one or two men. Send for descriptive circular giving complete specifications. It will help if you advise us regarding drilling depths and general nature of work.

NEW YORK ENGINEERING COMPANY
75 WEST ST., NEW YORK, N. Y.
Works: YONKERS, N. Y.

course 13.8 mi. St. 17 from U.S. 16 to Lennox.

Roberts Co.—grading, service gravel 8.5 mi. St. 10 from West County Line to Sisseton.

Todd Co.—base course 18.2 mi. U.S. 18 from Okreek to Mission.

service gravel 12 mi. U.S. 83 from Nebraska State Line North.

Tripp Co.—base course 20 mi. U.S. 183 from Presho to Jordan.

Turner Co.—base course 7 mi. U.S. 18 from East County Line to St. 19.

Union Co.—c. conc. 0.5 mi. U.S. 77 city of Elk Point. Approx. **$2,987,573.**

Tex., Houston — Tex., Houston-United Home Builders, Inc., 10,000 Humble Rd., asph. paving roads and streets. **$100,000.**

Tex., Taylor — Williamson Co. c/o Judge, Courthouse, Georgetown, bond election Apr. 23, approx. 18 mi. roads connecting with 2 main highways, Southern half of Precinct 4, **$350,000;** approx. 30 mi. black-topped road and feeder and gravel roads, northern half of Precinct 4, **$400,000.** CD 11/10—ENR 11/25.

Tex., Terrell Hills—Terrell Hills, c/o Nelson Miller, 305 Charles Rd., concrete curbing, asph. paving all streets. **$400,000.**

Washington—State Hy. Dpt., O. R. Dinsmore, dir., Olympia.

King Co.—imprv. Bothell-North Bend Hy., relocating, grading and bridges, Wayne vicinity to Woodinville, **$350,000.**

resurfac., sub-sealing 1.8 mi. Woodinville south, **$30,000.**

fill and culvert at Dry Gulch Bridge, **$25,000.**

reconstructing Tokul Creek bridge, **$10,000.**

b. conc. Snoqualmie Falls hill, **$18,000.**

resurfac., sub-sealing 0.8 mi. Fall City east, **$12,000.**

following on Primar State Hy. 5, wid'n. shoulders, resurf., sub-sealing 2.6 mi. Renton south, **$60,000.**

spot ballast and non-skid seal 12.7 mi. Greenwater vicinity, **$75,000.**

spot ballast and mixed seal 1.7 mi. Enumelaw east, **$6,000.**

bit. repair, Enumclaw to Greenwater, **$15,000.**

spot ballast and non-skid seal 6.6 mi. Dallas recreation Silver Creek vicinity, **$30,000.**

Crystal Creek Vicinity, **$20,000.**

●**Washington**—State Hy. Dpt., Olympia.

King Co.—imprvs. on Primary State Hy. No. 1, incl. paving 4.1 mi. Issaquah Junction west, **$100,000,** reconstructing buoyancy system in draw span of Lake Washington floating bridge, **$100,000,** imprv. drainage and illumination of tunnel west of bridge, **$35,000,** location work on 11 mi. Renton-Issaquah Sect., **$11,000,** non-skid seal on 11.8 mi. Issaquah Junction to North Bend, **$30,000,** b. conc. Preston cut-off, **$10,000,** location work, 10 mi. Primary St. Hy. No. 1, Seattle to Pierce County line, **$10,000,** relocating, grading, surfacing 3 mi. Secondary St. Hy. 2-A, Kennydale vicinity, **$270,000,** imprvs. on Fairfax branch of Primary State Hy. No. 5, incl. grading, surfacing, oiling and bridge 1.4 mi. Buckley to White River, grading, surfacing oiling 3.1 mi. White River to Enumclaw, **$162,000,** following on Renton-Enumclaw Hy., bit. macad. 4.9 mi. Krain to Black Diamond, **$35,000,** resurfacing, sub-sealing 3.4 mi. Renton east, **$50,000,** relocating, grading, surfacing 1 mi. Secondary St. Hy. 1-I, Mukilteo north, **$150,000;** relocating, grading, surfacing 2.1 mi. Secondary St. Hy. 1-L, **$170,000,** widening shoulders and drainage imprvs. 2.7 mi. Secondary St. Hy. 1-J, Lake City to junction with Pacific Hy. **$6,000.**

Snohomish Co.—paving Broadway cut-off in Everett, **$320,000,** paving, resurfacing 3.7 mi. Primary St. Hy. No. 1, Snohomish to King County Line, **$150,000.** Seattle-Everett connection with Broadway cut-off, **$30,000.** O. R. Dinsmore, St. Hy. Dir.

●**Washington**—State Hy. Comn., Olympia.

Yakima Co.—imprv. following highways, Yakima to Kittitas Co. line, **$910,000.**

Parker Bridge to Buena, **$670,000.**

Buena to Sunnyside, **$1,095,000.**

Sunnyside to Benton Co. line, **$315,000.**

Buena to Toppenish, **$260,000.**

Toppenish to Klickitat Co. line, **$1,425,000,** surfacing, oiling White Pass Hy. **$650,000.**

Chinook Pass Hy. Cliffdell to summit, **$1,080,000.**

Yakima to Naches, **$180,000.**

Union Gap-Parker, **$155,000.**

Parker-Toppenish, **$330,000.**

Toppenish-Mabton, **$890,000.**

Mabton to Benton Co. line, **$360,000.**

Benton Co., line to Prosser, $260,000.

Secondary State Hy. 3-B, White Swan to Toppenish, **$220,000.**

Toppenish Creek to Lateral C, **$140,000.**

Toppenish to end of pavement, **$60,000.**

end of pavement to Goldendale, **$200,000.**

West Wapato-Parker, **$245,000.**

Secondary State Hy. 3-C, West Wapato Rd. **$225,000.**

Secondary State Hy. 11-A, city limits to Moxee, **$365,000.**

●**British Columbia** — Province of British Columbia, Victoria.

100 Mile House — paving 47 mi. Cariboo Hy., 47 mi. south from here, **$500,000.**

Armstrong-Enderby — paving 9 mi. Okanagan Hy. between Armstrong and Enderby, **$95,000.**

Beaver Creek and Great Central Lake — paving 10 mi. **$105,000.**

Castlegar-Nelson — paving 25 mi. Southern Trans-Provincial Hy. between Castlegar and Nelson, **$250,000.**

Chilliwack — paving 20 mi. Trans-Canada

(Continued on page 141)

Aerial view showing proposed diversion of the Colorado River at the Davis Dam site.

First Davis Dam runner upon arrival at the Bureau of Reclamation storehouse enroute to the dam site. Workmen are unbolting the steel "spider" used to brace the runner during shipment.

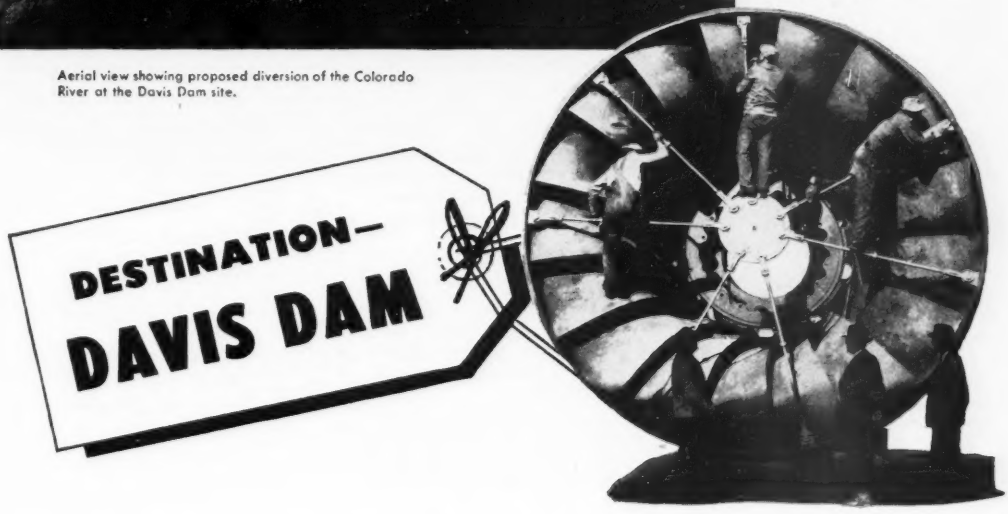

Between 800,000,000 and 1,000,000,000 kilowatt hours of badly needed electrical energy will be added to the nation's annual power supply with the completion of Davis Dam. Last link in a comprehensive plan to conserve and utilize the waters of the Colorado, this dam will impound 1,800,000 acre-feet of water, and harness every available foot of head between the site and the Hoover Dam tail race.

Five giant Baldwin turbines, each with a rating of 62,200 HP under a 120-foot head, will turn the 45,000 kva generators. Two of the turbine runners—the largest ever cast in one piece—have already been shipped after machining at Baldwin. The remaining three will soon be on their way. Baldwin equipment, reinforced by Baldwin experience, has helped in the development of some of the world's largest hydro-electric projects.

BLW THE BALDWIN GROUP **BALDWIN**

HYDRAULIC TURBINES

THE BALDWIN LOCOMOTIVE WORKS
Philadelphia 42, Pa.

THE PELTON WATER WHEEL COMPANY
2929 Nineteenth Street, San Francisco 10, Calif.

Offices: Boston, Chicago, Cleveland, Houston, New York, Philadelphia, Pittsburgh, San Francisco, Seattle, St. Louis, Washington. In Canada: Baldwin Locomotive Works of Canada, Ltd., Toronto, Ontario.

Dig Deep FAST! WITH AN OSGOOD

Get MORE Yardage . . . Even In Tight-Fit, Hard-To-Get-At Corners

Move an agile Osgood hoe right up to the job—and into it—with no lost motion. Its reputation is built on superior speed, mobility, power, and a high and far reach that allows the operator to pick up a load anywhere and to drop it accurately—wherever he wants it.

Yes, whatever the job, you can move more dirt, faster, with an Osgood—Shovel, Dragline, Crane, Clamshell, or Hoe. Gasoline, Diesel or Electric powered—⅜ to 2½ cu. yds. Write for descriptive literature and specifications.

POWER SHOVELS • CRANES • DRAGLINES • CLAMSHELLS • BACKHOES • PILE DRIVERS

THE OSGOOD CO. O-G THE GENERAL CO. EXCAVATOR

MARION OHIO

DIESEL, GASOLINE OR ELECTRIC POWERED • ⅜ TO 2½ CU. YD. • CRAWLERS & MOBILCRANES

EPPINGER AND RUSSELL CO.

Wood Preservers Since 1878

80 Eighth Ave., New York 11, N. Y.

PRESSURE TREATED TIES—POLES—PILING—LUMBER

WITH

Creosote or Chromated Zinc Chloride

TREATING PLANTS

Jacksonville, Fla. Norfolk, Va.

Eddington, Pa

The BELMONT IRON WORKS

Engineers — Fabricators — Erectors
Contractors — Exporters
Cable address—Beliron

STRUCTURAL STEEL
BUILDINGS & BRIDGES
RIVETED — ARC WELDED
Shops — Eddystone

PHILADELPHIA

Main Office Philadelphia 46, Pa.

AISC

ROYERSFORD

New York Office 44 Whitehall St., N. Y. 4, N. Y.

(Continued from page 142)

Hy., Chilliwack easterly towards Hope, **$210,000.**

Cowichan Lake — paving 15 mi. Cowichan Lake Rd., **$155,000.**

Cranbrook-Kimberly — paving 17 mi. hy. between Cranbrook and Kimberly, **$180,000.**

Fort Steele Junction-Jeffray — paving 22 mi. Southern Trans-Provincial Hy. between Fort Steel Junction and Jaffray, **$230,000.**

Grand Forks — paving 10 mi. Southern Trans-Provincial Hy. west of Grand Forks, **$105,000.**

Hope-Princeton — paving 74 mi. Southern Trans-Provincial Hy., east of Hope, to Princeton, **$750,000.**

Parksville-Qualicum — paving 7 mi. Island Hy. in vicinity of Parksville and Qualicum, **$75,000.**

Prichard-Chase — 14 mi. Trans Canada Hy. between Prichard and Chase, **$145,000.**

Rock Creek — 11 mi. Southern Trans-Provincial Hy., east Rock Creek, **$115,000.**

Trail-Fruitvale — 7 mi. Hy. between Trail and Fruitvale, **$75,000.** H. C. Anderson, Parliament Bldgs., Victoria, engr. CD 3/1/43—ENR 3/4/43.

EARTHWORK, WATERWAYS

†Idaho — U. S. Eng., 19 E. Poplar St., Walla Walla, Wash., repairing levees and revetments, Snake River between mouth of Henrys Fork and U. P. R.R. East Belt Bridge in Madison and Jefferson Counties, Serial No. Eng. 45-164-49-46.

†Illinois — U. S. Eng., 826 U. S. Court House and Custom House, St. Louis, 1, Mo., levee imprv., Harrisonville and Ivy Landing Drainage & Levee Dist., Proj. Item 1-A (1) Monroe Co.

●Massachusetts — Commonwealth of Mass., State Dpt. P. Wks., 100 Nashua St., Boston, and U. S. Govt., stone, concrete breakwater, Provincetown Harbor, **$1,500,000.**

†New Mexico—U. S. Eng., Box 1538, Albuquerque, Rio Hondo Channel imprvs., incl. clearing approx. 10 acres river channel, Eng-29-005-49-68.

Tex., El Campo — City, Paul Herrmann, mayor, drainage sys. imprvs., extens. **$150,000.** Ford Hudson, city engr.

AIRPORTS AND AIRBASES

†N. J., Trenton — AIRPORT — Bureau Yards and Docks Annex, Navy Dpt., Arlington, Va., plans by Frank Grad & Son, 187 Market St., Newark, shop bldg., Mercer Airport. Over **$150,000.** Jaros Baum & Bolles, 37 Wall St., New York, N. Y., consult engrs.

N. C., Wilmington — AIRPORT BLDG. — New Hanover Co., Wilmington, plans by Leslie N. Boney, Jr., Murchison Bldg., administration bldg. at Bluethenthal Airport. **$160,000.** CD 10/2/47—ENR 10/16/47.

●Ore., Portland — AIRPORT — Port of Portland, Spalding Bldg. plans by John W. Cunningham & Assoc., Spalding Bldg., runway and other imprvs. **$2,582,554.** CD 9/29—ENR 10/14.

†Tex., Ellington Field (near Houston)—AIRFIELD BLDGS.—U. S. Eng., 606 Santa Fe Bldg., Galveston, remodeling, rehabilitating field bldgs. **$250,000;** storage and warehousing, **$100,000.** CD 8/6—ENR 8/12.

Tex., Grand Prairie — HANGAR — Chance-Vought Aircraft, c/o Earl Martin, Grand Prairie, plans by Albert M. Kahn & Assoc., 345 New Center Bldg., Detroit, Mich., hangar. **$100,000.** CD 4/26—ENR 5/13.

Va., Roanoke—ADMINISTRATION BLDG.—City, Municipal Bldg., plans by Eubank & Caldwell, Boxley Bldg., administration bldg. at Woodrum Field. **$320,000.** CD 6/30/44—ENR 7/13/44.

PUBLIC BUILDINGS

Ala., Brewton—Escambia Co. Hospital Assn., Brewton, plans by Charles H. McCauley, Jackson Bldg., Birmingham hospital. **$500,000.**

●Calif., Los Angeles—Bd. Regents University of California, 451 N. Hilgard St., plans by Wurdeman & Becket, 3757 Wilshire Blvd., Medical School, first unit, **$15,500,000;** L. T. Evans, 2500 W. 6 St., Los Angeles, consult. engr.; plans by Douglas McClellan, 816 W. 5 St., Los Angeles, administration bldg., **$1,500,000.** CD 8/24/44—ENR 9/7/44.

Colo., Denver—University of Colorado, Medical School, 4200 E. 9 Ave., plans by Fisher & Fisher, 827 Denver Natl. Bank Bldg., cancer research bldg. at University of Colorado medical school. **$558,000.**

Conn., East Hartford—Town, E. Leonard Clarkin, chn., East Hartford Housing Auth., plans by Kane & Fairchild, 40 Pearl St., Hartford, 50 family units, Riverside Park, **$519,000.** CD 10/—ENR 10/28.

●†Conn., Hartford—Pub. Bldgs. Admin., F Ave. between 18 and 19 Sts. N. W., Wash. D. C., brick, steel, stone post office. **$7,000,000. FWA.**

●†Idaho, Arco—U. S. Atomic Energy Comn., 1901 Constitution Ave. N. W., Wash., D. C., atomic reactor testing station, 400,000 acre site, near Pocatello, **$100,000,000.**

●Ia., Davenport—Bd. Educ., Davenport, voted $3,500,000 bonds Mar. 14, school.

●Ia., Marshalltown—Bd. Educ., Marshalltown, voted $500,000 bonds school, **$1,000,000.**

Kan., Emporia—State Bd. Regents, Topeka, plans by C. L. Marshall, state archt., William Allen White Memorial Library, at Emporia State College. **$850,000.**

La., Bogalusa — City, City Hall, plans by Smith & Padgett, Monroe, Washington-St. Tammany Charity Hospital. **$600,000.**

(Continued on page 147)



Cemesto installation for Consolidated Edison Co., Astoria, L. I., N. Y. Cemesto erection contractor: John Munder.



Attractive and economical use of alternate bands of glass and Cemesto for power plant at Goodyear Tire & Rubber Co.

U.S. Navy residence building of Cemesto and brick masonry built in 1939 at Brooklyn, New York.



Simple beauty of Cemesto in a curtain wall. Curtis-Wright Corp., Louisville, Ky. Architect: Albert Kahn, Detroit, Mich.

Row of modern California houses built with Cemesto. La Jolla, Calif. Contractor: Kesling Modern Structures.



42,000 square feet of Cemesto used for roof deck and curtain walls. B. F. Goodrich Co., Marietta, O.

Build with CEMESTO!

REG. U. S. PAT. OFF.

Celotex Cemesto Is the Proven Multi-Function Material for Speedy, Permanent, Low-Cost Construction of Every Kind

No other single-thickness material gives you *all* the advantages of Cemesto* for fast, economical construction of permanent roof decks, curtain walls, and partitions. Cemesto has proved itself by 19 years of outstandingly successful use in industrial, commercial, residential, and public construction of all types and sizes . . . all over the world . . . under every condition of climate.

Cemesto is a rigid, fire- and weather-resistant panel made of Celotex cane fibre to which cement-asbestos board is bonded on both sides by a moisture-proof bituminous adhesive. It combines high thermal insulation with exceptional structural strength. Its hard, smooth, light-reflecting surfaces provide both exterior and interior finish that need no painting or maintenance.

Cemesto can be worked with ordinary hand or power tools, and is easy to apply. It speeds construction, cuts costs. It will pay you to investigate the many possibilities of this versatile material for your own use. Write today for complete technical data, plus application recommendations. No cost or obligation.

THE CELOTEX CORPORATION · CHICAGO 3, ILLINOIS

**Cemesto is a registered trade mark identifying a structural insulation product manufactured by The Celotex Corporation.*

Cemesto is the preferred material for roof decks because it affords important economies in design, application, maintenance.

Caulking joints between Cemesto panels. Carolina Asbestos Co., Marshville, N. C. Contractor: Interstate Const. Co. Architect: A. G. Ulrey.

Asphalt roll roofing applied over Cemesto. Pittsfield Township School, Washtenaw, Mich. Architect: C. Noble. Contractor: DeKenning Const.

The 14-ton key to the city haul!

WHEN THIS SUBWAY excavation began, one problem was to find trucks that could truck the muck 24 hours a day and set a profitable pace over a route, 128 city blocks long!

These International six-wheelers could—and did! They took the muck, 8 yards at a crack, to a dump 8 miles away. Sure, they did it like they were made for the job. They *were!*

This operation required specialized equipment built for the job. The heavy-duty 6 x 4 International KB-11-F was selected. Reinforced side rails withstand unusual shock stresses of big loads dropping into the bed from elevated loading hoppers. The special power divider with integral auxiliary transmission provides a low creeper gear for pulling out of bad spots and an axle ratio coordinated with the main transmission to provide cruising speeds required to meet the schedule. Because of the heavy loads hauled through heavily congested areas, large-size heavy-duty air brakes were installed to insure safe operation.

That's what International means when it says it builds trucks *specialized* for the job. International offers 22 basic models, with gross weight ratings ranging from 4,400 to 90,000 pounds. And it forms 1,000 different truck combinations from 'em—one for every load, road, and haul.

And International's service facilities are just as complete as the line of trucks it offers. 4,700 International Dealers and 170 company-owned Branches are waiting to wait on you . . . any place . . . any time.

So whether you're working on a subway or a skyscraper, a sewer or a sausage factory, International offers a complete line of trucks specialized to the job. A call to your nearest International Dealer or Branch will put you on the right track to the right truck. Why not put in that call right away!

Other International Harvester Products . . . Industrial Power
Farmall Tractors and Machines . . . Refrigeration

Tune in James Melton and "Harvest of Stars"
NBC, Sunday afternoons

INTERNATIONAL TRUCKS

INTERNATIONAL HARVESTER COMPANY • CHICAGO

(Continued from page 144)

●**Mass., Attleboro** — City, J. Turner, chn., Attleboro Housing Auth., plans by S. S. Eisenberg, 69 Summer St., Boston, 35 houses, South Ave., **$1,100,000.** CD 11/10—ENR 12/9.

Mass., East Bridgewater — Town, School Dpt., plans by Perry, Shaw & Heyburn, 955 Sq. Bldg., Boston, school, **$600,000.** Cleverdon-Varney & Pike, 120 Tremont St., Boston, engrs. CD 9/4/47—ENR 9/18/47.

Mass., New Bedford—City, Wm. K. Burks, supt. P. Bldgs., brick, steel municipal auditorium, **$500,000.**

Mass., South Peabody—City of Peabody Housing Auth., Al Arsenault, chn., Peabody, 68 unit housing, Lynn St. **$680,000.**

Mass., Wayland—Town, Trustees Jonathan Maynard Parmenter Fund, C. D. Scotland, pres., brick, steel, concrete hospital. **$500,000.**

O., Hamilton—Bd. Educ., H. H. Howard, bus. mgr., 332 Dayton St., plans by Outcalt, Guenther & Assoc., 3124 Shaker Square, Cleveland, 2 story, part bsmnt., Jefferson Tyler elementary school. **$750,000.** CD 1/3/47—ENR 1/23/47.

●**Pa., Shamokin**—Commonwealth of Pennsylvania, Harrisburg, addnl. bldgs. to house proposed division of heart ailments at Shamokin State Hospital. **$3,000,000.**

●**R. I., Newport**—City, City Hall, plans by J. E. Nichols, 7 S. Main St., West Hartford, Conn., brick, steel, concrete Senior High School. **$1,500,000.** CD 5/22/44—ENR 6/1/44.

●**Tenn., Nashville**—State Bd. Educ., State Office Bldg., plans by Marr & Holman, Stahlman Bldg., school for blind. **$2,000,000.** CD 1/7/48—ENR 1/22/48.

Tex., Beaumont — Beaumont Independent School Dist., Beaumont, plans by Maurice E. Wilmer, Beaumont, high school and vocational shop. **$590,000.** CD 7/1—ENR 7/22.

●**Tex., Corsicana**—Navarro Co. c/o Comrs. Court, Joe D. Huffstutler, judge, $550,000 bond election Apr. 12, 100 bed memorial hospital. **$1,200,000.** CD 6/7—ENR 6/17.

●**Tex., Freeport** — Brazosport Independent School Dist., c/o Terrell W. Ogg, supt., plans by Emory S. White, M & M Bldg., Houston, 1 story masonry, concrete, steel high school, concrete slab fdn., rein.-con. outdoor type swimming pool. **$1,500,000.** W. F. Moore, 4605 Montrose St., Houston, structural engr. Dale S. Cooper & Assoc., 420 Sul Ross Ave., Houston, mechanical engr. CD 10/4—ENR 10/28.

●**Alta., Edmonton**—Eastern Rockies Forest Conservation Bd., Edmonton, forest development, watershed protection, eastern slopes Rocky Mountains, **$1,152,000** voted.

●**Ont., Hamilton**—Dpt. P. Wks., Hunter Bldg., Ottawa, Ont., veterans bldg., Main and Caroline Sts. Approx. **$2,500,000.** G. Brault, c/o owners, archt. CD 12/10/45—ENR 3/7/46.

COMMERCIAL BUILDINGS

●**Calif., Belmont**—G. W. Williams, 10 California Dr., Burlingame, 400 residences in Foothill Tract. **$4,000,000.**

Calif., Millbrae—Neils Schultz, 1 Hillcrest Blvd., 100 residences in northern limits of Highland Dist. Approx. **$500,000.**

Minn., East Grand Forks—Sacred Heart Parish, Rev. A. I. Merth, plans by U. L. Freed, Aberdeen, S. D., church, parochial school, rectory, heating plant. **$500,000.**

N. Y., Bayside — Floveland Realty Corp., c/o G. C. Miller, archt., 67 W. 44 St., New York, Zone 18, 14 two family houses, 196 Pl. and 69 Ave.; 12 two family houses, 196 Pl. and 69 Ave.; 22 two family houses, 67 Ave. between 197 St. and 196 Pl.; 22 two family houses, 69 Ave. between 197 St. and 196 Pl. **$719,000.**

N. Y., Bayside — Jeffrey Gardens Apartments, c/o Samuel Paul & Assoc., archts., 163-18 Jamaica Ave., Jamaica, apartments, 48 Ave. and 216 St.; 217 St. near 48 St. 216 St. near 48 St. 47 Ave. and 216 St. **$620,000.**

N. Y., Bayside — Rayland Realty Corp., c/o G. C. Miller, archt., 67 W. 44 St., New York, Zone 18, 13 two family houses, 196 Pl. and 73 Ave.; 15 two family houses, 196 Pl. and 69 Ave.; 23 two family houses, 69 Ave. between 197 and 196 Sts.; 23 two family houses 73 Ave. between 197 St. and 196 Pl. **$820,500.**

N. Y., Brooklyn — 100 Remsen Street, Inc., 521 Fifth Ave., New York, plans by A. Rollin Caughey, 1150 Ocean Ave., Zone 30, 8 story apartment, 100-106 Remsen St. **$400,000.**

N. Y., Far Rockaway — W. F. Brumna, c/o Lederer & Joseph, archts., 66 Court St., Brooklyn, Zone 2, 47 one family houses, Beach 90 and Beach 89 Sts., and Beach Channel Dr. **$352,500.**

N. Y., Far Rockaway — Mott Improvement Corp., c/o Schulman & Soloway, archts., 4 Court Square, Brooklyn, Zone 2, 3 story apartment, Dickens St. and Mott Ave., **$258,000;** 3 story apartment, Eggert Pl. and Mott Ave. **$258,000;** 3 story apartment, Mott Ave. and Dickens St. **$234,000.**

●**N. Y., Floral Park** — Langdale Realty Corp., c/o Samuel Paul & Assoc., archts., 163-18 Jamaica Ave., Jamaica, 170 two family houses, Langdale and 268 Sts., 81 and 83 Aves. **$1,682,000.**

●**N. Y., Flushing** — Hunter Garden Apartments, Inc., c/o Lama, Proskauer & Prober, archts., 383 Pearl St., Brooklyn, Zone 1, 2 three story and one 6 story apartments, 38 Ave. and 149 St. **$2,800,000.**

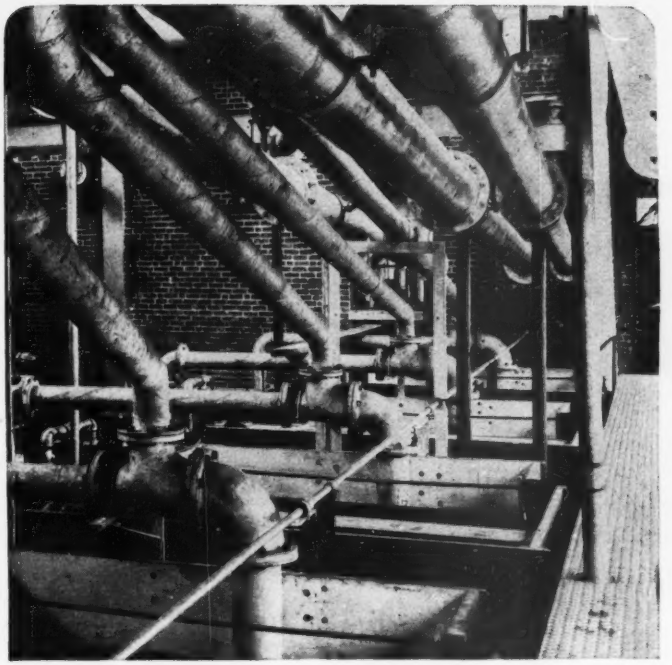

Are You Paying "Excess Metal Tax" On Plant Piping?

Why spend precious piping dollars for excess weight and material? By specifying ARMCO Welded Steel Pipe you can avoid this "tax"—get more pipe for your money.

Here's how it works. ARMCO Pipe comes in a wide range of diameters (6 to 36 inches) with wall thicknesses from 9/64- to 1/2-inch. You can choose the *one right size for the job.*

But that's only part of the story. Standard or special prefabricated fittings come welded to straight pipe runs. You save hours of assembly work and cut costs. When long lengths (up to 50 feet) can be utilized you save even more. Fewer flanges also mean less chance for leaks.

You can use ARMCO Welded Steel Pipe with confidence. It has a high safety factor against internal and external pressures. Rigid inspections assure freedom from surface defects.

Use ARMCO Steel Pipe for plant piping, water supply and force mains or wherever else you need dependable piping. Write us for prices and other data. Armco Drainage & Metal Products, Inc., Welded Pipe Sales Division, 2185 Curtis Street, Middletown, Ohio. Export: The Armco International Corporation.

ARMCO WELDED STEEL PIPE

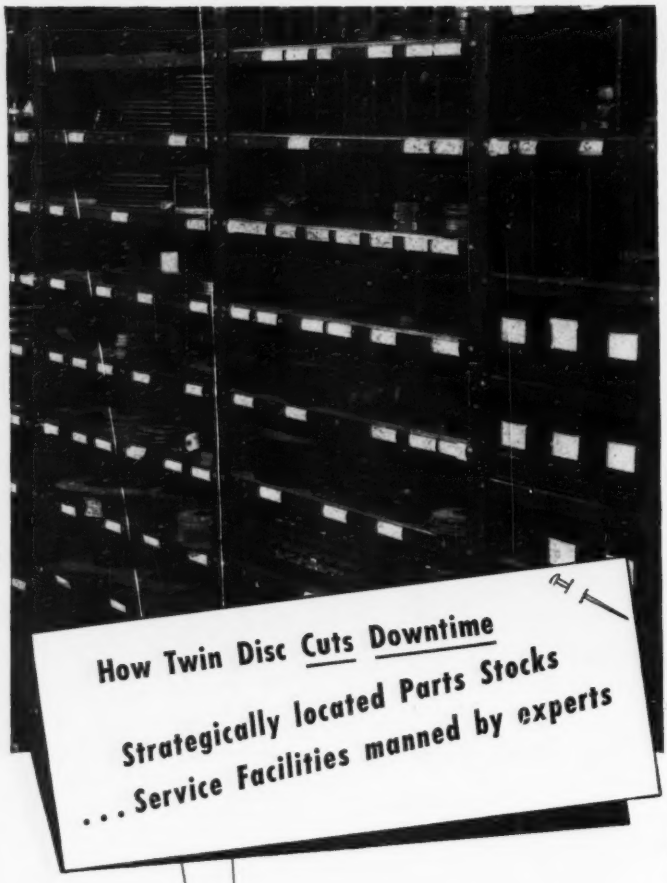

Twin Disc's service program . . . established after an extensive study of the frequency-usage of repair parts . . . assures owners of Twin Disc equipment minimum downtime by stock-piling active parts as required in each Twin Disc outlet.

All Twin Disc Authorized Repair Parts Stations are adequately staffed with sales engineers and factory-trained service men—men with wide experience in the solution of power transmission problems and the servicing of Twin Disc Clutches and Hydraulic Drives.

For the right Twin Disc repair part, correctly installed, see your Authorized Twin Disc Repair Parts Station. TWIN DISC CLUTCH COMPANY, Racine, Wisconsin (Hydraulic Division, Rockford, Illinois).

SPECIALISTS IN INDUSTRIAL CLUTCHES SINCE 1918

N. Y., Flushing — Promenade Homes Corp., c/o Samuel Paul & Assoc., archts., 162-16 Jamaica Ave., Jamaica, 42 one family houses, Utopia Parkway, 184 St., 50 and 56 Aves. **$294,000.**

●**N. Y., Forest Hills** — Syndicate, c/o Arthur Weiser, archt., 240 Madison Ave., New York, Zone 16, six 6 story apartments along Yellowstone Blvd. between 65 Ave. and 66 Rd. **$4,420,000.**

●**N. Y., Hollis** — Holliswood Estates, c/o Joseph Unger, archt., 138-22 78 Ave., Flushing, ten 2 story bldgs. Marengo St., Pompeii and Dunton Aves. **$1,316,000.**

N. Y., Jamaica—Milled Realty Corp., c/o Morris Rothstein & Sons, 186 Joralemon St., Brooklyn, Zone 1, 21 one-family houses at 120, 121, 122, 123, 124 Aves. and 155 St. **$250,000.**

N. Y., New York—New York University, 100 E. Washington Square, plans by F. P. Platt & Bros., 101 Park Ave., Zone 17, school alterations at premises. **$250,000.**

●**N. Y., New York**—Rockefeller Institute for Medical Research, 66 St. and York Ave., plans by Coolidge, Shepley, Bulfinch & Abbott, 1 Court St., Boston, Mass., hospital and nurses and doctors residence, 1194-1268 York Ave. **$2,200,000.**

N. Y., New York—Workmens Circle Foundation, 150 Broadway, Zone 7, plans by George W. Swiller, 535 E. Tremont Ave., Zone 57, 3 story old age home, on site bounded by Grace, Hammersley, Ely and Burke Aves. **$850,000.**

●**N. C., Raleigh**—Sears, Roebuck Co., W. Arthington and S. Homan Sts., Chicago, Ill., retail store in Cameron Village, Cameron and Daniels Sts., Oberlin Rd. and Smallwood Dr. Approx. **$1,000,000.**

N. C., Winston-Salem—Wake Forest College, Reynolda Rd., humanities bldg. between main bldg. and library in south central portion of campus. **$800,000.** Jens F Larson, 331 Madison Ave., New York, N. Y., consult. engr. CD 10/21/46—ENR 10/31/46.

●**O., Cincinnati**—Christ Church, Rev. N. Burrough, pastor, 318 E. 4 St., plans by Sarainen & Assoc., W. Longlake Rd., Bloomfield Hills, Mich., granite, stone church, remodel parish house and chapel. **$2,500,000.**

●**Pa., Brentwood**—South Hills Land Development, Inc., 429 Diamond St., Pittsburgh, plans by J. Kenneth Myers, 524, 4 Ave., Pittsburgh, 100 one and two story, brick veneer houses. **$1,000,000.**

●**Pa., Whitehall Boro**—J. C. Benson, 2961 Brownsville Rd., Pittsburgh, plans by C. V. Blezard, 432 Eureka St., Pittsburgh, 5 brick veneer, block 3 story bsmnt., apartments, three 40 x 80 ft. and two 40 x 130 ft. **$1,500,000.**

●**Tex., Corpus Christi**—Orville W. Eastland, Jones Bldg., plans by E. Dexter Hamon, Med. Prof. Bldg., 166 rental housing units. **$1,000,000.** Frank Drought, 117 W. Pecan St., San Antonio, structural engr. H. Bartholomew & Assoc., 317 N. 11 St., St. Louis, Mo., landscape archts. CD 3/11.

Tex., Dallas — East Dallas Presbyterian Church, 4420 Swiss St., church, 9 acre site at Bob-O-Link Dr. **$400,000.** CD 12/5/45—ENR 12/27/45.

●**Tex., San Antonio**—Incarnate Word College, 4107 Broadway, student health service, **$750,000**; masonry library, **$500,000**; masonry gymnasium, **$650,000.** CD 2/25—ENR 3/10.

INDUSTRIAL BUILDINGS

●**Calif., Stockton**—MILL—Acala Cotton Mills, Inc., c/o J. Kessel, 3208 Pacific Ave., 10,000 spindle cotton textile mill. **$1,000,000.**

Conn., Hartford—GAS CONDUCTOR, etc.—Hartford Gas Co., 233 Pearl St., brick, concrete gas conductor, precipitator and sub-station bldgs., Front St., **$130,000.**

Fla., Miami Beach — GARAGE — Parking Facilities, Inc., c/o R. Robert Swartburg, archt., 126 24 St., auto parking garage. Over **$250,000.**

●**Ill., Decatur**—PLANT—A. E. Staley Mfg. Co., Decatur, plant. **$1,000,000.**

Ia., Des Moines — GRAIN ELEVATORS — Farmers Grain Dealers Assn., 18 and Vine Sts., grain elevator addn. **$400,000.**

Ia., Des Moines—PLANT—Iowa Farm Bureau Federation, Farm Bureau Bldg., fertilizer plant. **$850,000.**

Kan., Kansas City—WAREHOUSE—Kansas City Wholesale Grocery Co., 1208 W. 12 St., Kansas City, warehouse. **$100,000.**

Ky., Shelbyville—WAREHOUSE—Doty Monley, Frankfort, Lee R. Walker and Raymond Mitchell, Owensboro, Irvin Blakemore, Lawrenceburg, auction warehouse, on U. S. 60. **$100,000.**

La., Houma—SALES and SERVICE—George Broussard, Inc., 510 Lafayette St., auto sales and service bldg., **$100,000.**

N. Y., Brooklyn—FACTORY—Bartley Realty Corp., 4201-23 Avenue H, plans by Seelig & Finkelstein, 153 Pierrepont St., Zone 2, 2 story factory, alterations, 4123 Avenue H. **$115,000.**

●**Pa., Elrama**—POWER STATION—Duquesne Light Co., 435 6 Ave., Pittsburgh, power station. **$28,000,000.** C. T. Sinclair, c/o owner, ch. engr.

Pa., Pittsburgh—SHOP—Union R. R. Co., F. R. Smith, ch. engr., East Pittsburgh, steel fr., diesel shop bldg., Hall Station. **$350,000.**

(Continued on page 150)

DON'T LET "TRADITION"

Double YOUR HEATING INVESTMENT

DRAVO *Counterflo* HEATERS CUT SYSTEM COSTS and FUEL COSTS!

Why pay toll to tradition by installing an elaborate wet-type heating system in structures having large open areas . . . when Dravo *Counterflo* Heaters can do the job for a fraction of the cost of *installation* . . . and a fraction of the cost of *operation?*

No expensive piping . . . these 80 to 85% efficient heaters "manufacture" the warmth right in the area where it is used. *No involved installation* work—the 100-150 foot air-throw warms the working-zone of large open areas without duct work. *No delays* . . . the heaters are ready for immediate delivery, require only power, fuel and vent connections—and they're ready to go! *No maintenance headaches* . . . the rugged, mill-type construction, the stainless steel combustion chamber, the top-drawer engineering all contribute to long, attention-free service. *No fuel worries* —heaters use either oil or gas, and can be readily converted from one to the other. *No uncertainty*—AGA approved and UL listed.

Here's a good point to remember. Practically all heating systems *end up* by warming the air. Dravo *Counterflo* Heaters reduce cost and eliminate waste and complication, by warming the air to *begin with.* The biggest names in American industry are listed on the roster of enthusiastic users. Let us send you a list of typical customers, so you can verify heater performance for yourself. For the detailed story of construction, operation, installation and results, ask for Bulletin AC-523-1

DRAVO
CORPORATION
DRAVO BUILDING, PITTSBURGH 22, PA.

Dravo also manufactures the *DRAVO CRANE CAB COOLER* for air conditioning hot-metal crane cabs.

PITTSBURGH • CLEVELAND • PHILADELPHIA • DETROIT • NEW YORK • CHICAGO • ATLANTA • BOSTON

Sales Representatives in Principal Cities. Mfd. and Sold in Canada by Marine Industries, Ltd., Sorel, Quebec.

DRAVO

Body illustrated: Model RB-70, standard 7 cu. yd. rock body, specially constructed for quarry and rock work. Made in all capacities. Mounted over standard double-lift arm type under body hoist or telescopic hoist, depending on capacity and use.

Keep ahead of schedule with "On The Job" Design

In Marion Bodies and Hoists you get dependable loading, hauling and dumping performance that keeps you "loads ahead." With "On The Job" design you get sturdy construction features developed by Marion engineers in the field under actual operating conditions.

Ask your Marion Distributor about the Marion unit designed "on the job" to meet your special requirements, or write direct.



MARION

DUMP BODIES and HYDRAULIC HOISTS

GET MORE DETAILS NOW
Just mail a post card or letter for the complete Marion catalog, or ask your Marion Distributor.

MARION METAL PRODUCTS CO., MARION, OHIO

"GUNITE"

NEW CONSTRUCTION AND REPAIRS

- Prestressed Tanks
- Repair all Types Disintegrated Concrete
- Dam Reconstruction and Repairs
- Linings and Repairs to Reservoirs, Stacks, Bunkers, Sewers, Tanks, Tunnels, Pen Stocks
- Structural Steel Encasements
- Restoration of Masonry Structures

Experienced Personnel

Write for our new 48 page Bulletin

PRESSURE CONCRETE CO.

Gunite Contractors and Engineers

193 Emmett Street, Newark 5, New Jersey — *So. Court Street, Florence, Alabama*

33 N. LaSalle St., Chicago 2, Ill.

High Grade Hardwood

SURVEYOR STAKES

Stained Yellow Bound with Steel Strapping

	Per 100	In 1000 lots Per 100
1x2—12"	$5.05	$4.60
1x2—15"	5.15	4.65
1x2—18"	5.25	4.75
1x2—24"	6.20	5.65
1x2—36"	8.80	8.00
2x2—12	6.50	5.90
2x2—15"	8.15	7.00
2x2—18"	8.70	7.90
2x2—24"	10.45	9.50
2x2—36"	15.00	13.65

Prices net F.O.B. Cumberland, Md.

BUCHANAN LUMBER CO.

CUMBERLAND, MD.

(Continued from page 148)

●**Pa., Pittsburgh**—PLANT etc.—Western Electric 910 River Ave., 2 story, brick, concrete repair plant and warehouse. **$5,000,000.**

S. D. Nunda—GRAIN ELEVATOR—Nunda Co-operative Assn., Nunda, grain elevator. **$500,000.**

Tenn., Nashville—WAREHOUSE—Guardian Life Insurance Co., c/o Hart, Freeland & Roberts, archts., 3rd Natl. Bank Bldg., warehouse. **$250,000.**

Va., Danville — WAREHOUSE — Piedmont Warehouse Corp., Danville, rebuilding warehouse. Approx. **$100,000.**

Wash., Seattle—GARAGE—Ten Co., c/o J. Blume, University Chev. Co., E. 45 St. and Roosevelt Way, plans by Naramore, Bain, Brady & Johanson, Dexter Horton Bldg., deck parking lot garage. **$400,000.** CD 4/26/46—ENR 5/16/46.

●**Philippines, Iloilo** — PLANT — Philippine Portland Cement Co. Inc., Manila, cement plant. **$1,000,000.**

●**Que., Sherbrooke**—PLANT—E. Gagnon, 3899 Rivard St., Montreal, plans by J. Damphousse, 937 Laurier Ave., Montreal, 100x200 ft. plant, **$1,000,000.** CD 2/21—ENR 3/10.

UNCLASSIFIED

Arkansas—RURAL DISTRIBUTION LINES—Petit Jean Electric Co-operative, Clinton, 236 mi. rural distr. lines, other facilities, Conway Co., etc. **$920,000.** Southwest Electric Engineers, Jonesboro, consult. engrs. CD 3/18.

Illinois—RURAL DISTRIBUTION LINES—M. J. M. Electric Co-operative, Inc., Carlinsville, addnl. rural distr. lines, extens. and sys. imprvs., Macoupin, Jersey and Montgomery Counties. **$310,000.**

●**Illinois**—RURAL DISTRIBUTION LINES—Illinois State-Wide Power Co-operative, c/o Abe Becker, state mgr., Illinois Electric Co-operative Assn., Springfield, 3,000 mi. rural distr. lines, generating plant on Illinois River near Beardstown and on Wabash River, at Maunie. **$3,000,000.**

Iowa—RURAL DISTRIBUTION LINES—Hancock Co. Rural Electric Co-operative, Garner, rural distr. lines, Hancock Co. **$190,000.** Brown Eng. Co., K. P. Bldg., Des Moines, consult. engr. CD 5/12—ENR 6/3.

Ia., Dubuque — DRIVE-IN-THEATRE — Tri-States Theatre Corp., G. Ralph Branton, genl. mgr., 800 Paramount Bldg., drive-in theatre, Hy. 386, near Sageville Rd. Approx **$100,000.**

La., Denham Springs—NATURAL GAS SYSTEM—City, P. T. Jones, mayor, **$170,000** bond election May 17, natural gas sys. exten. Barnard & Burk, Triad Bldg., Baton Rouge, consult. engrs.

Md., Laurel — RACE TRACK — Maryland Jockey Club, Pimlico, Baltimore, Laurel Race Track addns., alterations. **$750,000.**

Missouri—RURAL DISTRIBUTION LINES—Barry Electric Co-operative, Cassville, sys. imprvs., completion construction, Barry Co. Approx. **$210,000.**

Nebraska—RURAL DISTRIBUTION LINES—Loup Valley Rural Electric Membership Assn., Ord., 333 mi. rural distri. lines, Valley, Greeley, Wheeler, Garfield and Loup Counties. **$300,000.** Raymond H. Reed & Co., Columbus, engr.

O., Cincinnati—STADIUM AND FIELD—Bd. Educ., 511 W. Court St., plans by Hake & Hake, engrs. and archts., 2400 Gilbert Ave., concrete stadium and field, parking areas, chain link fence, pipe railings, etc. **$400,000.**

Oklahoma—RURAL DISTRIBUTION LINES—Verdigris Valley Electric Co-operative, Collinsville, 164 mi. rural distr. lines and sys. imprvs., Rogers Co. **$700,000.**

●**Oregon**—RURAL DISTRIBUTION LINES—Coos-Curry Electric Co-operative, Coquille, 35 mi. rural distr. lines, 141 mi. distr. lines and sys. imprvs., Coos Co. **$1,000,000.**

Texas — RURAL DISTRIBUTION LINES — Lamar County Electric Co-operative Assoc., Paris, 102 mi. rural distr. lines, sys. imprvs. and headquarters facilities, Lamar Co. **$245,000.**

Wisconsin—RURAL DISTRIBUTION LINES—Adams-Marquette Electric Co-operative, Friendship, 187½ mi. rural distr. lines and sys. imprvs., Adams Co. **$546,000.**

Wisconsin—RURAL DISTRIBUTION LINES—Vernon Electric Co-operative, Westby, 58 mi. rural distr. lines, 7½ mi. transmission lines, sys. imprvs., and completing previously approved constr., Vernon Co. **$537,000.** CD 6/5/47—ENR 6/26/47.

Wyoming—PIPELINES—Frontier Refining Co., Boston Bldg., Denver, Colo., pipelines originating in Mush Creek and Lodge Creek fields in northeastern Wyo. and connecting with Rocky Mountain Gas Co. lines at Lance Creek. **$600,000.**

●**Wyoming** — OIL PIPELINE — Plains Pipe Line Co., Newcastle, oil pipeline serving fields in Western and Niobrara Counties. Approx **$1,500,000.**

●**Alberta**—RAILROAD—Canadian Pacific Ry., J. E. Armstrong, ch. engr., Windsor Station, Montreal, Que., railway line from Ford-Highwood Collieries to Okotoks. Approx. **$3,500,000.**

●**British Columbia**—POWER DEVELOPMENT—British Columbia Power Comn., 918 Government St., Victoria, power development, Quesnel River, Little Canyon, **$5,500,000.**

30,000,000 GALLON DETROIT RESERVOIR USES *Vitrified* CLAY PIPE FOR UNDERDRAINAGE SYSTEM

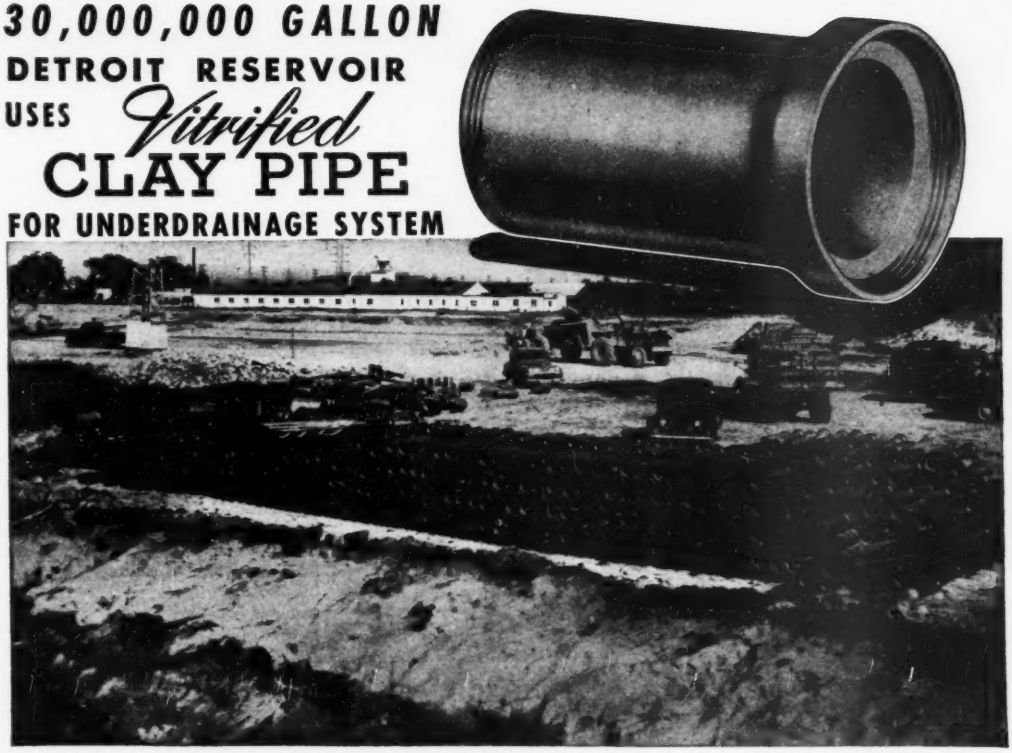

Built without piling, the underdrainage system for Detroit's new Northeast Station Reservoir is designed to prevent floating of the reservoir, which measures 451 ft. by 551 ft. with an average depth of 20 ft. Bryant & Detwiler, Detroit, Mich. — general contractors. Loselle Construction Co., Wyandotte, Mich. — sub-contractors for excavation and for installation of Vitrified Clay Pipe underdrainage.

VITRIFICATION under modern firing methods, with temperatures and time scientifically controlled, welds nature's most enduring, chemically inert raw material into strong, non-corrosive, rust-proof, everlasting Clay Pipe. In no other pipe do you get all the advantages of *complete fusion by fire.* No wonder Vitrified Clay Pipe is universally preferred for sewerage and drainage projects.

Vitrified CLAY PIPE

CLAY PIPE NEVER WEARS OUT!

C-1161-2

WRITE FOR INFORMATION ON *Your* CLAY PIPE QUESTION

NATIONAL CLAY PIPE MANUFACTURERS, INC.

100 N. LaSalle St., Rm. 2100, Chicago 2, Ill.
522 First National Bank Bldg., Atlanta 3, Ga.
703 Ninth & Hill Bldg., Los Angeles 15, Calif.
1105 Huntington Bank Bldg., Columbus 15, O.

3-bin grain storage silo of Burke Brewery, Inc., Long Island City, N. Y. Outside dimensions are 30'6"x15'4" with 8" walls of concrete made with Lehigh Early Strength Cement. Height of 1st cutback, 57'2" 2nd, 68' . . . 3rd, 82'3".

CONTRACTOR—Wm. B. Neill, Inc., 50 Vesey St., New York, N. Y.

DEALER—Supro Building Products Co., 4816 70th St., Woodside, N. Y.

JANUARY 17, 1949

JANUARY 19, 1949

JANUARY 22, 1949

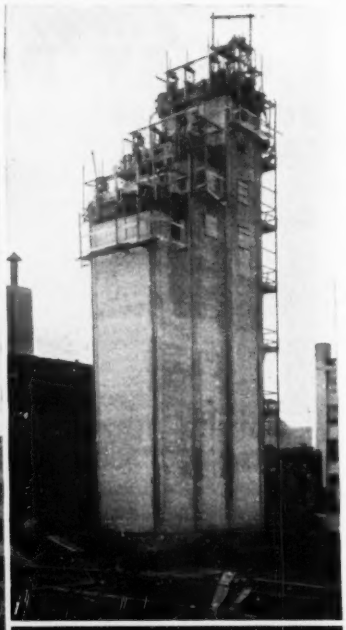

from start to finish in less than 5 days with LEHIGH EARLY STRENGTH CEMENT

Here's a good example of how speed can be put in a job by using Lehigh Early Strength Cement. At 12:30 P.M. on Monday, January 17, 1949, the first pour was made for the 3-bin concrete silo of the Burke Brewery, Long Island City, N. Y. Less than 5 days later on Saturday at 10:30 A.M. the walls of the 82'3" high structure were topped out.

Weather conditions were none too good. Typical winter temperatures prevailed. And during the last two days of pour, there was intermittent rain, sleet and snow. Yet the work went on.

Save time . . . save money . . . use Lehigh Early Strength Cement for all construction where close building schedules must be maintained. Our Service Department will be glad to help you with your specific problems.

Lehigh CEMENTS

LEHIGH PORTLAND CEMENT COMPANY • ALLENTOWN, PA. • CHICAGO, ILL. • SPOKANE, WASH.

LEHIGH PORTLAND CEMENT • LEHIGH EARLY STRENGTH CEMENT • LEHIGH AIR-ENTRAINING CEMENT • LEHIGH MORTAR CEMENT

CONSTRUCTION REPORTS—Second Section

Third Section Construction Reports on page 164

WATER SUPPLY

BIDS ASKED

April 18

Mass., Tewksbury—Commonwealth of Mass., P. A. Tompkins, comr., P. Welfare, Ford Bldg., 15 Ashburton Pl., Boston, WW sys. imprvs., State Proj. C-109, Contr. 1, Tewksbury State Hospital. Plans deposit $10., Weston & Sampson, 14 Beacon St., Boston, engrs.

N. Y., New York—Comr. Water, Supply, Gas & Electricity, Municipal Bldg., Zone 7, watermains, appurtenances, Stronghurst, 79, 80 and 81 Aves., and 236, 258, 259, 268 and 269 Sts., Queensboro. Plans deposit $1.

April 19

Kan., Hays—V. Wells, city clk., City Hall, water supply pipelines, well houses, appurtenances. Plans deposit $15. Wilson & Co., 223 N. Santa Fe St., Salina, engrs. CD 9/22—ENR 10/14.

O., Akron—Dpt. Pub. Service, M. L. Davis, dir., Municipal Bldg., Cont. 403-A, trestle foundations and 60 in. concrete pipelines for Akron water purification and pumping plant. Plans deposit $10. Parsons, Brinckerhoff, Hall & Macdonald, 51 Broadway, New York, N. Y., engrs. CD 11/17/47—ENR 11/20/47.

LOW BIDDERS

●**Calif., Los Angeles**—City, Dpt. Water & Power, 207 S. Broadway, Apr. 4, Franklin-Baldwin Trunk lines, rein.-con. pipe, from American Pipe & Constr. Co., South Gate, **$2,888,195**; Baldwin Outlet Line, rein.-con. pipe, from United Concrete Pipe Corp., Baldwin Park, **$2,088,355**. CD 3/10—ENR 3/17.

SEWERS, WASTE DISPOSAL

BIDS ASKED

April 18

Mass., Weymouth—Town, Bd. Sewer Comr., J. W. Field, secy., Town Hall, 6,625 ft. 18- to 30- in. sewers, railroad tunnel crossing and appurtenant work, Metcalf & Eddy, 1300 Statler Bldg., Boston, engrs. CD 2/25/46—ENR 3/7/46.

April 20

Md., Baltimore—Mayor & City Council, City Hall, Sect. 1, brick, concrete Brooklyn Sewage Pump. Station, Sect. 2 100 lin. ft. 24 and 30 in. vitr. pipe and masonry sewers, 300 lin. ft. 24 to 36 in. c.i. pipelines, etc. Plans deposit $5. J. J. Hunt, sewerage engr. CD 1/27/44—ENR 2/10/44.

Wis., Granton—Village, sewers, sewage disposal plant **(A)** 9,296 ft. 8 and 10 in. sewers, 150 ft. 8 in. c. i. pipe, 29 manholes, eighty-five 4 in. wye's, 2,800 ft. 4 in. and 170 ft. 6 in. house connections, school house line, 1,150 ft. 8 in.; 3 manholes, 100 ft. siphon **(B)** sewage treatment plant; **(C)** sewage treatment plant equip. $83,000. Plans deposit $15. Davy Eng. Co., 502 Main St., La Crosse, engr.

April 21

Ga., Eatonton—City, Eatonton, outfall lines, two 200,000 g.p.d. treatment plants, etc. Plans deposit $25. Harwood Beebe Co., Spartanburg, S. C., engr.

April 26

Calif., Los Angeles—Bd. Supervs. Los Angeles Co., 501 Hall of Records, 2.9 mi. 8 in. vitr. clay sanitary sewers in Emerson Pl., Wilmar, $63,200; 2.84 mi. 8 and 10 in. vitr. clay sewers, Waterlow St., Bell Gardens, etc.; 8 mi. rein.-con. storm drain, appurtenances, Michillinda St., Arcadia, approx. $50,000. C. E. Arnold co. engr. and surv. CD 3/18—ENR 3/31.

LOW BIDDERS

●**Tex., Houston** — M. H. Westerman, secy., Mar. 30, enlarging Northside Sewage Disposal Plant, incl. sludge plant, from Rust Eng. Co., M. & M. Bldg., **$1,041,081**. Est. $1,000,000. CD 3/15—ENR 3/17.

CONTRACTS AWARDED

●**N. Y., Brooklyn**—Dpt. P. Wks., Municipal Bldg., New York Zone 7, Contr. 4, pump and powerhouse at Owls Head sewage treatment works, bounded on north of Long Island R. R., on south and west by New York Bay and east by Shore Parkway, to Thompson Starrett Co., Inc., 444 Madison Ave., New York, Zone 22, **$3,748,240*****Contr. 11, Electrical Equip., to Plymouth Electric Constr. Co. Inc., 21 E. 40 St., New York, Zone 17, **$748,865**. CD 1/10—ENR 1/13.

BRIDGES

BIDS ASKED

April 18

N. Y., New York—President Manhattan Boro, Municipal Bldg., Zone 7, foundations for viaduct overpasses between Franklin D. Roosevelt Dr. and 1st. Ave. at E. 42 and E. 48 Sts., etc. for United Nations Proj., Contr. 162. Plans deposit $25. Extended date. CD 4/4—ENR 4/7.

LOW BIDDERS

Connecticut — State, G. Albert Hill, comr., State Office Bldg., Hartford, Apr. 4, 36 ft. span concrete, steel bridge over Whiting River constr. 5,562 ft. pavement on U. S. Rt. 44, North Canaan, from Heney-Lundgren Co., Shrewsbury, Mass., **$177,664**; 2 rein.-con. 50 ft. span bridges over Little River elimination of Bank St. Curve, Seymour, from Marianni Constr. Co., 222 Forbes Ave., New Haven, **$309,369**. CD 3/25—ENR 3/31.

●**Louisiana**—State Hy. Dpt., Baton Rouge, Apr. 6, steel, concrete, superstructure 1.306 mi. Calcasieu river bridge, State Rt. C-2109, S. P. 3-30-03, F. A. P. FI 35 (17), Lake Charles, Calcasieu Parish, from Virginia Bridge Co., 821 Madison Ave. N. E., Roanoke, Va., **$3,245,022**. CD 2/2—ENR 2/10.

CONTRACTS AWARDED

●**Massachusetts**—Mystic River Bridge Auth., E. A. Brest, chn., 6 Beacon St., Boston, c. conc. paving superstructure, Mystic River Bridge, Charlestown and Chelsea, to Merritt, Chapman, & Scott Corp., 79 Milk St., Boston, Contr. 8, **$1,463,200**, Contr. 8A **$589,900**, Contr. 8B **$950,-300**. Grand total $3,002,500. Bids 3/24, awarded 3/31. CD 3/31—ENR 4/7, under LB.

●**New York** — Bureau Contracts & Accounts, Albany, bridge, 4.26 mi. Lake Ontario State Parkway and 2.14 mi. adjacent service roads, Monroe Co., to S. J. Groves & Sons, Co., Nedrow, **$1,625,115**. Bids 2/16. CD 2/18—ENR 2/24, under LB.

STREETS AND ROADS

BIDS ASKED

April 18

Mass., Winchendon—Town, Allan J. White, chn. Bd. P. Wks., Town Hall, asph. and tar road materials, various streets. Over $50,000.

N. Y., New York—President Manhattan Boro, Municipal Bldg., Zone 7, asph. repaving 5 Ave. 135 to 137 Sts., etc., contr. 465. Extended date. CD 4/4—ENR 4/7.

April 20

Minn., Fairfax—Village, A. R. Quast, clk., Village Hall, 16,000 cu. yd. excav., 28,000 lin. ft. concrete curb and gutter, 58,500 sq. yd. ½ in. stabilized grav. base and 1½ in. bit. top, 129,-000 sq. ft. sidewalk, $50,000. Plans deposit $10. L. E. Lane, Willmar, engr.

April 21

Fla., Jacksonville—City, City Hall, Jacksonville, asph. paving Julia St. from north property line of Church St. to south property line of State St. and incl. concrete parking strip with integral curb complete in place. Capt. W. E. Snedden, Engineers Bldg., city engr. CD 1/17/45—ENR 2/8/45.

Ia., Newton—Bd. Supervs, Jasper Co., Newton, 12,000 cu. yd. grav., 19,000 tons crushed stone, secondary roads. Approx. $50,000. Ray McMurrey, co. engr.

†Virginia—Pub. Roads Admin., 1440 Columbia Pike, Arlington, c. conc. 2 mi. Proj. 6A17, George Washington Memorial Parkway, Arlington Co. Plans deposit $10.

Late in April or May

Ill., Grayville—City, City Council, City Hall, c. conc. curb and gutter, gravel, or crushed stone, base course, and bit. tr. surf. various arterial streets, approx. $138,000. Marbry & Johnson, Inc., 209½ N. Cross St., Robinson, engr. CD 3/18—ENR 3/31.

PROJECTS COVERED

Projects—By Size

Construction projects here reported cover the United States and Canada, are of these minimum sizes or larger: water supply, earthwork, waterways $28,000; other public works $50,000; industrial buildings $68,-000; other buildings $250,000.

Classes of Construction

(Name in order of Listing)

Water Supply	Latin America
Sewers, Waste Disposal	Public Buildings
Bridges	Commercial Buildings
Streets & Roads	Industrial Buildings
Earthwork, Waterways	

Unclassified

Stages Reported

PROPOSED WORK: Including appointment of engineers or architects.

BIDS ASKED (new announcements only). For full calendar, see also preceding issues of ENR.;

LOW BIDDERS: On jobs below $500,000 value all low bidder news will be the final reports published on the projects involved except where award is not made to the low bidder. In this case, a supplementary contract award report will be published.

CONTRACTS AWARDED: Except awards to low bidders previously reported in low bidder stage.

Dates shown are of issue in which last previous report was published.

Symbols and Abbreviations Include:

† Federal Government
● Project of $1,000,000 or over.
ENR Engineering News-Record
CD Engineering News-Record Construction Daily

May 3

†Ohio—U. S. Eng., Huntington 18, W. Va., surf. entrance roads for Beach City, Charles Mill, Clendening, Dover, Mohawk and Pleasant Hill Dams, Muskingum River Reservoirs, Serial No. Eng-46-022-49-123. CD 11/16—ENR 11/18, under LB.

LOW BIDDERS

Connecticut — State, G. Albert Hill, comr., Hartford, Apr. 4, b. conc. resurf. 13,028 ft. Merritt Parkway, from Peckham Road Corp., White Plains, N. Y., **$83,987**; c. conc. 4 mi. Wilbur Cross Parkway from Derby Ave., Orange to West Rock Tunnel, New Haven, from Gammino Constr. Co., 729 Valley Rd., Providence, R. I., **$589,289**. CD 3/25—ENR 3/11.

●**Kentucky**—State Hy. Dpt., Frankfort, Apr. 1, bit. surf. Class 1, 9.039 mi. S. P. Group 1 (1949), McCracken Co., from Barber Paving & Eng. Co., 7 S. Dearborn St., Chicago, Ill., **$96,671*****bit. conc. Class 1, 8.677 mi. S. P. Group 2 (1949), Ballard and Carlisle Counties, from White Constr. Co., 1831 W. Columbia St., Chicago, Ill., **$79,823*****bit. surf. Class C-1, 22.375 mi. S. P. Group 3 (1949), Muhlenberg and Todd Counties, from Ellis, Kelly & Co., Owensboro, **$91,265*****bit. surf. Class 1, 27.865 mi. S. P. Group 4 (1949), Henry, Oldham and Trimble Counties, from H. K. Williams, 4141 Park Blvd., Louisville, **$141,723*****bit. surf. Class C-1 and A-2 seal, 18.303 mi. S. P. Group 5 (1949), Butler and Grayson Counties, from J. Speed, Yager, 315 High St., Frankfort, **$104,083*****bit. surf. Class 1 and rock asph. 26.137 mi. S. P. Group 6 (1949), Nelson, Spencer and Washington Counties, from Carey Constr. Co., 613 Citizens Bank Bldg., Lexington, **$163,650*****bit. surf. Class 1 and rock asph. 10.193 mi. S. P. Group 7 (1949) Boone, Campbell and Kenton Counties, from Eaton Asphalt Paving Co., Covington, **$103,688*****bit. surf. 31.919 mi. S. P. Group 8 (1949), Casey Co., from L. P. Cavett Co., Lockland, O., **$150,545*****bit. surf. Class C-1, 10.846 mi. S. P. Group 9 (1949), Pike Co., from H. C. Adams, 968 Delaware Ave., Lexington, **$62,207*****bit. surf. 37.15 mi. S. P. Group 10 (1949), Menifee and Morgan Counties, from Allen-Codell Co. Inc., Winchester, **$164,348*****bit. surf. Class F, 38.252 mi. S. P. Group 11 (1949), McCreary and Whitley Counties, from Middle West Roads Co., Noblesville, Ind., **$240,270***** reconstruction and traffic bound surf., river gray. 3.176 mi. Old Boone Rd., RS 39-133; Gallatin Co., and 6.24 mi. Old Boone and Ross Rds., RS 39-133 and RS 39-153 (combination), Gallatin Co., from L. H. Hardin Co., Bedford, **$54,128** and **$87,044** respectively*****traffic bound limestone 0.48 mi. Hazard Relief Rt. Rd., U 138 (14) SP 97-542, Perry Co., from Nally & Ballard, Inc., Bardstown, **$304,961**. CD 3/9—ENR 3/17.

Maryland—State Hy. Dpt., Baltimore, Mar. 22, c. conc. 1.241 mi. dual hy., grade separation, structures, approaches at Ridge Rd., Contr. AA-368-6-358, Anne Arundel Co., from Carozza-Mansilli & Co., 10 W. 25 St., Baltimore, **$851,233**. CD 3/16.

New York—President Queens Boro, 129-55 Queens Blvd., Kew Gardens, Zone 15, paving Centre and George Sts. and Queens Blvd., from Mac Asphalt Constr. Corp., 33-15 Lawrence St., Flushing, **$51,229** and **$91,361** respectively. CD 3/23.

CONTRACTS AWARDED

N. J., Newark—City, City Hall, paving ¼ mi. Magazine St., to Standard Bitulithic Co., foot of Brill St., **$100,974**; constructing 0.4 mi. Sixth Ave. (West), to American Paving Co., Bessemer St., **$115,586**. CD 12/22/43—ENR 12/30/43.

Vermont—State Hy. Dpt., Montpelier, construct road, South Burlington and Burlington, to W. H. Hinman Inc., North Anson, Me., **$381,-470**. Bids 3/18, awarded 3/25.

●**Wisconsin**—State Hy. Comn., Madison, c. conc. 19.61 mi. Peeksville-Morse and Morse-Mellen Rd., S. T. Hy. 13, Contr. 1, Proj. F 04-6 (26) and F 04-6 (27), to J. R. Griffith Co., 1500 Ninth St., Racine, **$625,910*****bit. 9.519 mi. South County Line-West Morgan Ave. Rd., U. S. Hy. 41, Contr. 1, Proj. T 02-2 (1), Milwaukee Co., to Payne & Dolan of Wisconsin, Inc., 735 N. Water St., Milwaukee, Zone 2, **$614,255*****concrete masonry-asph. 1.298 mi. West Fond du Lac Ave., S. T. Hy. 55, Proj. U-027-1 (7) to White Constr. Co., 2543 W. Greves St., Milwaukee, Zone 3, **$535,-460**. Grand total **$1,775,634**. CD 4/4, under LB.

EARTHWORK, WATERWAYS

BIDS ASKED

April 19

N. Y., New York—Comr. Parks, at office Dpt. Parks, Arsenal Bldg., Central Park, 64 St. and 5 Ave., Zone 21, repairing timber fender sys. along bulkhead between E. 63 and 64 Sts., Franklin D. Roosevelt Dr., Contr. No. M-108-149. Plans deposit $5.

†North Carolina, Virginia and Florida—U. S. Eng., Charlestonhouse, Wilmington, dredging channel from Back Sound to Lookout Bight, N. C. and Atlantic Intracostal Waterway between Norfolk, Va. and the St. Johns River, Fla., Serial No. Eng-31-075-49-54.

South Carolina — State Hy. Dpt., Columbia, 341 ft. creosoted pile, treated timber groins on beach at Folly Island, S. C. Docket 10.322; 869 ft. creosoted timber pile and treated timber groins on beach at Edisto Island, S. S. Docket 10.323, both Charleston Co.; 3 creosoted timber pile and treated timber groins, totaling 731 ft. on beach at Pawley's Island, S. C. Docket 22.253, Georgetown Co.

LARGEST RUBBER HOSE

Engineered by Raybestos-Manhattan

A prominent southern chemical plant needed an unusually large, flexible, corrosive resisting line to discharge slurry through a narrow underground tunnel. It could be installed only by bolting together and drawing the entire line through — a tremendous strain on hose and flanges. The operation represented a large investment, a vital part of the process. They could not afford to take chances on anything but properly designed and engineered hose.

They gave the problem to Raybestos-Manhattan hose engineers. The result was the design and manufacture of what is believed to be the biggest rubber hose ever made in the long lengths required.

Pictured here are twelve 25′ lengths of 18″ I. D. Condor Flexible Rubber Pipe being checked by Raybestos-Manhattan engineers before shipment. One length of this huge hose weighs over half a ton . . . 1,425 lbs. Manhattan has made hose of larger diameters but, considering length, this is the biggest hose in its history.

If you have hose requirements, you can't go wrong by going to the men who are proved engineers of hose . . .

Keep Ahead With Manhattan

MANHATTAN RUBBER DIVISION—PASSAIC, NEW JERSEY

RAYBESTOS-MANHATTAN, INC.

Manufacturers of Mechanical Rubber Products • Rubber Covered Equipment • Radiator Hose • Fan Belts • Brake Linings • Brake Blocks • Clutch Facings • Packings • Asbestos Textiles • Powdered Metal Products • Abrasive & Diamond Wheels • Bowling Balls

†**South Carolina**—U. S. Eng., Custom House, Charleston, center boat slip of the Custom House wharf and the U. S. Navy Fleet Landing, Charleston Harbor, Serial No. Eng-38-051-49-23.

April 20

Fla., Pensacola—Santa Rosa Island Auth., c/o R. G. Patterson, engr., 615 S. Palafox St., grading 0.5 mi. between Station 24 plus 20 and Station 54 plus 00, near Pensacola Beach. Plans deposit $10.

†**Illinois**—U. S. Eng., 826 U. S. Court House and Custom House, 1114 Market St., St. Louis 1, Mo., levee repair, Big Swan Drainage and Levee Dist., and Walnut Creek Private Levee, Scott Co., Serial No. Eng-23-065-49-118.

April 27

Texas — State Hy. Comm., Austin, dredging, stockpiling shell material adjacent to Nueces Bay Causeway on Hy. US 181, C. 101-6-9, Nueces Co. $160,000. D. C. Greer, c/o owner, engr.

LOW BIDDERS

●†**Washington**—Bureau Reclamation, Dpt. Interior, Bldg. 1-A, Denver, Federal Center, Denver, Colo., April 1, completing feeder canal proj. 1.5 mi. earthwork, concrete lining and structures, relocation 1.25 mi. railroad, and construct dam to block upper Grand Coulee 3 mi. southwest of Grand Coulee Dam, North barrier for 27 mi. equalizing reservoir of project irrigation sys., Columbia Basin Proj., Grant Co., Spec. 2586 from J. A. Terteling & Sons, Inc., 4011 Fairview Ave., Boise, Idaho, **$2,730,009** and **$1,988,717** respectively. CD 3/2—ENR 3/10.

CONTRACTS AWARDED

†**Michigan** — U. S. Eng., 609 Federal Bldg., Detroit, Zone 26, dredging channel from mouth of Saginaw River, to natural deep water in Saginaw Bay, Bay Co., to Dunbar & Sullivan Dredging Co., 2312 Buhl Bldg., Detroit, **53c.** per cu. yd. Est. $195,313. Bids 3/22, awarded 4/5. CD 2/23—ENR 3/10.

AIRPORTS AND AIRBASES

BIDS ASKED

About April 26

†**Canal Zone**—AIRPORT—U. S. Eng., Box 5042, Ancon, Canal Zone, impry. drainage facilities, Albrook Air Force Base, Serial No. Eng-96-505-49-18. Plans deposit $15.

LOW BIDDERS

Ind., Evansville—TERMINAL BLDG.—Bd. Aviation Comrs., Evansville, Mar. 28, terminal bldg. addn., from Huber, Hunt & Nichols, P. O. Box 128, Indianapolis, **$843,677.** Est. $400,000. Jack Kinkel, 14 Court Bldg., archt. CD 3/16.

Ia., Fort Dodge—AIRPORT IMPRVS.—City, City Hall, clearing, grading, marking airport from D. B. Burch, 1718 Park Ave. S. E., Cedar Rapids; **$84,037***storm drainage sys., from R. J. Anderson Co., Des Moines, **$53,121*** runway paving, from Western Contg. Corp., Warnock Bldg., Sioux City, **$209,184.** CD 3/27/47—ENR 4/17/47.

Mass., North Adams—AIRPORT IMPRVS.—City, Mayors Office, City Hall, Mar. 30, Harriman Airport imprvs., from Petricca Constr. Co. Inc., 534 West St., Pittsfield, **$153,879.** CD 3/15—ENR 3/17.

†**N. J., Lakehurst**—AIRPORT—Pub. Wks. Office, U. S. Naval Base, Phila., Pa., Mar. 23, repairing, relocating, regrading, removing, trackwork and incidental work at railroad station, Naval Air Station, Spec. 20555, from W. C. Shaner & Son, 2029 N. 62 St., Phila., Pa., **$79,961.** CD 3/17.

†**N. Y., White Plains**—AIRPORT—U. S. Eng., 120 Wall St., New York, Zone 5, Mar. 31, Air National Guard facilities at Westchester County Airport, from Walter A. Stanley Constr. Co., Inc., Railroad Ave., Ossining, **$553,491.** CD 3/3—ENR 3/10.

●†**Alaska**—U. S. Eng., Pier 51, Seattle, Wash., Apr. 5, outside utilities at Eielson Air Force Base, Mile 26, Proj. S 95-507.49-13, from Solid Constr. Co., Fairbanks, **$497,448,** CD 2/25—ENR 3/10***airfield lighting at Eielson Air Force Base, Mile 26, DEF No. 4, from Reed & Martin, Fairbanks, **$703,000.** CD 2/14—ENR 2/17***temporary heating plant addn., steam and water distr. and sewage collections sys. extens. with necessary utilities, electrical distr. sys. and sewage lift station extens., completing construction utilities and outfall sewer line and fine grading and landscaping at Ladd Air Force Base, Inv. DEF-8, from B. and M. Constr. Co., Fairbanks, **$1,997,500***power plant at Ladd Air Force Base, DEF 7, from Morrison-Knudsen Co. Inc., and Peter Kiewit Sons Co., Hoge Bldg., Seattle, Wash., **$3,090,000.** CD 2/14—ENR 2/17.

CONTRACTS AWARDED

●**Pa., Pittsburgh**—TERMINAL—Comrs., Allegheny Co. County Office Bldg., 5 story, 90x560 ft., brick terra cotta, tile, limestone, granite terminal bldg. at greater Pittsburgh Airport, to Dick Constr. Co., 2532 Library Rd., **$2,378,000.** Bids 3/29. CD 3/17—ENR 3/24.

FOREIGN

Tanganyika, Dar es Salaam—Territory Government of Tanganyika, Dar es Salaam, receiving bids constructing drainage sys., 20 mi. 33 in. sewers. H. Humphreys & Sons, 17 Victoria St., Westminster, London, England, engrs.

(Continued on page 156)

6-Mile Paving Job on N.Y. Route 17

Here come the dirt movers. Grading team, made up of four scrapers and two 'dozers, starts on the day's work.

New York State Highway Department engineers go into a huddle. Left to right: Thomas J. Cornell, bridge engineer; John C. Crawford, detail engineer; and R. P. Berlureau, engineer in charge.

Bethlehem Reinforcing Bars shown in place in culvert. Project used 25 tons of reinforcing steel.

In order to make Route 17 straighter and safer, the New York State Highway Department authorized six miles of new construction between Jasper and Addison. The new highway is two lanes wide, and is relatively free of turns and grades. It was constructed by Potter DeWitt Corp., of Pavilion, N. Y. Steel items supplied by Bethlehem were bar mats, reinforcing bars and cable guard rail.

Easy does it! Workmen carefully gauge distance to road form before placing Bethlehem Bar Mat.

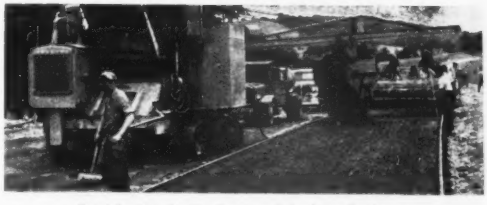

Batch-bucket shuttles back and forth endlessly, as it drops new concrete over Bethlehem Bar Mats.

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by
Bethlehem Pacific Coast Steel Corporation
Export Distributor: Bethlehem Steel Export Corporation

STEEL FOR HIGHWAYS

Dowel Units • Reinforcing Bars • Guard Rail Posts
Bar Mats • Guard Rail • Wire Rope and Strand
Hollow Drill Steel • Spikes • Bolts and Nuts • Pipe
Sheet- and H-Piling • Fabricated Structural Steel
Timber Bridge Hardware • Tie-Rods

BETHLEHEM STEEL

SPARLING MAIN-LINE METERS

Consistent Accuracy over 3 to 100% Flows

Accurate records of water flows are a necessity in today's Industry. The Sparling Indicator-Totalizer-Recorder shown here, operate by electric remote control from a Sparling Compound Meter, is accurate within 2 per cent on flows from 3% to 100% of the capacity of the pipe. Head loss is practically negligible.

For range of styles and sizes of water meters, instruments and controls, see Bulletin 310—sent at your request!

The SPARLING Manufacturers of WATER MEASURING EQUIPMENT

LOS ANGELES 54...Box 3277 Terminal Annex
CHICAGO 8.....1500 South Western Ave.
BOSTON 8 .....6 Beacon Street
DALLAS 1.....509 North Ervay Street
622 Broadway.....CINCINNATI 2
101 Parke Avenue.....NEW YORK 17
1932 First Avenue.....SEATTLE 1

VACUUM CONCRETE



S-T-R-E-T-C-H-E-S CEMENT

24 HRS. = DOUBLE STRENGTH
5 YRS. = 1⅓ STRENGTH
OF UNTREATED CONCRETE

Write for Further Information

VACUUM CONCRETE INC. 4210 SANSOM ST. PHILA. 4, PA.

(Continued from page 154)

LATIN AMERICA

Peru, Lima—Republic of Peru, Lima, road constr., day labor. Approx. **$4,158,000.** Ministry of Works, Lima, engrs. CD 1/16/46—ENR 2/7/46.

Venezuela—Ministry Pub. Wks., Caracas, constructing 300 mi. asph. paved roads, 22 bridges and numerous culverts in state of Estado Suire, to Equipos, S. A., Cumana, **$6,000,000.** CD 9/10/47—ENR 10/2/47.

PUBLIC BUILDINGS

BIDS ASKED

April 18

N. Y., New York—Dpt. P. Wks., Municipal Bldg., Zone 7, general contract, plumbing, electrical work for power plant expans. Phase B combined steam tunnel and sea wall Stage 1, on Welfare Island. Plans deposit $25.

Ont., Brockville—G. E. Cook, supt., Brockville General Hospital Bd. Governors, Brockville, 4 story, 44x177 ft., concrete, steel, brick, stone hospital wing. Approx. $400,000. Drever & Smith, 81 Brock St., Kingston, archts. CD 2/18—ENR 3/17.

April 19

Ky., Greyson — Greyson Co., Court House, Leitchfield, hospital. $250,000. Plans deposit $50. Otis & Grimes, Tyler Bldg., Louisville, archts.

April 20

Colo., Denver—School Dist. 1, W. W. Grant, pres. Bd., 414 14 St. 2 story, Smily Jr. High School addn. Raymond R. Erwin, 610 Patterson Bldg., engr. and archt.

N. Y., St. Johnsville—Bd. Educ., Central School Dist. 1, St. Johnsville, school. $400,000. Plans deposit $30. Myron A. Jordan, W. Main St., Richfield Springs, archt. CD 12/13/46—ENR 12/26/46.

April 21

Ala., Auburn — Alabama Polytechnic Institute, Auburn, small animal bldg. Plans deposit $30. Stevens & Wilkinson, 57 Luckie St. N. W., Atlanta, Ga., archts. CD 2/27/45—ENR 3/8/45.

Mo., Rolla—University of Missouri School of Mines & Metallurgy, c/o Curators of University of Missouri, Leslie Cowan, vice-pres., Jesse Hall, Columbia, brick concrete engineering laboratories bldg., at School of Mines and Metallurgy. Plans deposit $25. Jamieson & Spearl, 1696 Arcade Bldg., 812 Olive St., St. Louis, Zone 1, archts. CD 11/20/47—ENR 11/27/47.

Tenn., Fayetteville—Lincoln Co., Fayetteville, hospital addn. Plans deposit $150. Extended date. Hart & McBryde, 407 Cotton States Bldg., Nashville, archts. CD 3/31.

April 22

Colo., Adams City—Consolidated Adams City, Derby, Irondale & Riverdale School Dist., W. R. Fitzsimmons, 1 story, school. Approx. $300,000. T. H. Buell & Co., 730 14 St., Denver, engrs. and archts. CD 12/15—ENR 1/20.

Colo., Derby—Consolidated Adams City, Derby Irondale & Riverdale School Dist, Derby, 1 story school. Approx. $300,000. T. H. Buell & Co., 730 14 St., Denver, engrs. and archts. CD 12/15—ENR 1/20.

Fla., Gainesville—State Bd. Control, Tallahassee. Unit C dormitory, University of Florida, Guy C. Fulton, Peabody Hall, state archt. CD 1/6—ENR 1/20.

Miss., Leakesville — Greene Co., Leakesville, hospital. Plans deposit $25. Landry, Matthes, Olschner & Assoc., 218 W. Pine St., Hattiesburg, archts.

Neb., Fremont—City, Will R. Rowe, chn. Dpt. Utilities, Fremont, (1) sectionally supported boiler setting for 75,000 lb. per hr. boiler erected complete (2) one 20 ton per hr. automatic skip hoist type coal handling sys., incl. 150 ton coal storage bunker complete. Lutz & May 819 Finance Bldg., 1009 Baltimore Ave., Kansas City 6, Mo., engrs. CD 2/16/48—ENR 2/26/48.

Ohio—U. S. Eng., 925 New Federal Bldg., Pittsburgh 19, Pa., damtenders dwellings, appurtenances, Berlin Dam, Portage Co., Serial No., Eng-36-058-49-106; damtenders dwellings, storage bldg., appurtenances, Mosquito Creek Dam, Trumbull Co., Serial No. Eng-36-058-49-110. Extended date CD 3/14—ENR 3/17, and CD 3/29—ENR 3/31.

Va., Hopewell—At office Supt. Schools, Hopewell High School, Hopewell, school auditorium, shop addn. and 2 gymnasium. Approx. $300,000. Carneal & Johnston, Atlantic Life Bldg., Richmond, archts.

Ont., Goderich—Bd. Educ., S. Blake, secy., 2 story, bsmnt., 80x200 ft., brick, steel school. $350,000. Charles Gillin, 284 Dundas St., London, archt.

April 23

Ore., Eugene — School Dist. 4, Eugene, 12 classroom wood frame with brick and wood siding on exterior Junior High School. $540,000. Wolff & Phillips, Pearson 4th Ave. Bldg., Portland, archts. CD 11/26—ENR 12/9.

Ont., Timmins — V. Salome, town clk., laboratory. Plans deposit $20.

April 25

N. Y., Greenport—Greenport Hospital, Pike St., Mattituck, hospital addn., alterations. $500,000. William La Fon, Jr., 242 Herrick Rd., Southampton, archt.

S. C., Aiken—Aiken Co., Aiken, 50 bed hospital addn. Plans deposit $50. Willis Irvin, 722 Greene St., Augusta, Ga., archt.

April 26

Calif., Stockton—State Div. Architecture, P. Wks. Bldg., Sacramento, 1 and 2 story, 47,000 sq. ft. rein.-con. female patients ward, 1 story, bsmnt., 50x135 ft. concrete warehouse, 60x144 ft. metal covered garage, at Stockton State Hospital. Plans deposit $25. Anson Boyd, state archt. CD 3/5/46—ENR 3/14/46.

April 28

●**N. Y., Binghamton**—Binghamton Housing Auth., City Hall, housing. $2,000,000. Extended date. A. T. Lacey & Sons, 52 Exchange St., archts. CD 3/24—ENR 3/31.

●†**Ore., Portland**—Federal Reserve Bank of San Francisco, U. S. Bank Bldg., 4 story, bsmnt., sub-bsmnt., steel office. $2,500,000. Plans deposit $50. Pietro Belluschi, 2040 S. W. Jefferson St., archt. CD 4/15/47—ENR 5/1/47.

●**Tenn., Chattanooga**—Hamilton County Memorial Hospital, c/o Kaiser, Neal & Reid, archts., Keystone Bldg., Pittsburgh, Pa., hospital. Approx. $1,500,000. Wm. A. Martin, James Bldg., assoc. archt. CD 12/31—ENR 1/6.

About May 4 or June 4

●**Colo., Pueblo**—Colorado State Hospital, Dr. F. H. Zimmerman, supt., 4 story, 300 patient hospital rehabilitation center, $1,000,000; 3 story, 80x350 ft., rein.-con., brick, 360 senile patient hospital, $1,250,000. W. Gordon Jamieson & R. Ewing Stiffler, 818 12 St., Denver, Earl C. Morris, Empire Bldg., Denver, and Walter de Morduant, 758 Thatcher Bldg., Pueblo, archts.

May 4

●†**Pa., Wilkes-Barre**—U. S. Eng., P. O. Box 1715, Baltimore 3, Md., Veterans Admin. Hospital standard quarters, Serial No. Eng-1b-020-49-61, for Veterans Admin., Vermont Ave. between H and I Sts. N. W., Wash. 25, D. C. CD 3/16—ENR 3/24.

May 6

●**Va., Blacksburg**—Virginia Polytechnic Institute, Blacksburg, 3 agricultural units. Approx. $1,000,000. Carneal & Johnston, Atlantic Life Bldg., Richmond, archts. CD 9/30/46—ENR 10/3/46.

May 17

●**N. Y., Rome**—Bd. Educ., N. George St., Junior High and Elementary School. $3,000,000. Starrett & Van Vleck & Reginal Marsh, 101 Park Ave., New York, Zone 17, archts. CD 1/13—ENR 2/3.

May 17

●†**Wis., Madison**—U. S. Eng., Clock Tower Bldg., Rock Island, Ill., Veterans Admin. Hospital, Serial No. Eng-11-117-49-21, for Veterans Admin., Vermont Ave. between H and I Sts. N. W., Wash. 25, D. C. Holabird & Root & Burgee, 180 N. Wabash St., Chicago, Ill., engrs. and archts. CD 2/25—ENR 3/10.

June 8

●**La., Shreveport**—State, c/o The Associated Hospital Architects, archts., 202 Ward Bldg., 10 story Confederate Memorial Medical Center Bldg. $10,000,000. Plans deposit $100. CD 9/21—ENR 10/14.

LOW BIDDERS

Colo., Colorado Springs — City, Dpt. P. Utilities, Feb. 18, item 1, power piping, from McCarty-Johnson, 944 Osage St., Denver, **$169,211.** CD 2/1—ENR 2/3.

Conn., Danbury—City, Danbury Memorial Assn., G. A. McLachlan, chn., rejected bids Mar. 24, center part (gymnasium and heating plant) 2 story, brick, rein.-con. War Memorial Community Center, **$375,000.** Total $500,000. CD 9/1—ENR 3/3.

Fla., Miami Beach—City, Mar. 30, city auditorium, from Bradford Builders, Inc., 1101 Lincoln Rd., **$735,800.** CD 3/1—ENR 3/3.

Ga., Gainesville — Hall Co., Gainesville, Apr. 5, hospital, from Ray M. Lee Co., 1004 Edgewood Ave. N.E., Atlanta, **$879,600.** CD 3/2—ENR 3/10.

N. Y., Brooklyn—Supt. School Bldgs., Design & Construction 4th Flatbush Ave. exten., Zone 1, Apr. 4, general construction (east wing) addn. to P. S. 92, Parkside and Rogers Aves., from T. G. K. Constr. Co., Inc., 55 W. 42 St., New York, N. Y., **$934,319.** CD 3/7—ENR 3/10.

N. Y., Dongan Hills—New York City Housing Auth., 63 Park Row, New York, Zone 7, heating and ventilating for Charles W. Berry Houses, from H. Sand & Co., Inc., 291 Broadway, New York, **$442,620.** CD 3/23.

●**N. Y., East Meadow** — Bd. Supervs. Nassau Co., Old County Courthouse, Mineola, Apr. 5, general contract hospital alterations, addns., from James J. Waters Corp., 475 Lexington Ave., New York, Zone 17, **$6,889,000***heating** and ventilating, from Arthur E. Magher Co., Inc., 173 Christopher St., New York, Zone 14, **$837,000***plumbing**, from Thomas E. O'Brien & Jesse E. Kahn, 131 W. 21 St., New York, Zone 11, **$784,420***electrical** work, from Davidson Electric Co., 1265 Atlantic Ave., Brooklyn, Zone 16, **$572,700.** CD 3/17—ENR 3/24.

●**Tex., Galveston**—John Sealy Hospital, Foundation, 2325 Strand St., Apr. 5, one 6 story and three 3 story masonry, concrete, steel hospital bldgs., from Texas Gulf Constr. Co., 2008 S. Wayside Dr. Houston, **$4,061,287.** Est. $2,500,000. C. H. Page & Son, 305 W. 11 St., Austin, archts., R. E. Rolfe, 2204 Griffin St.

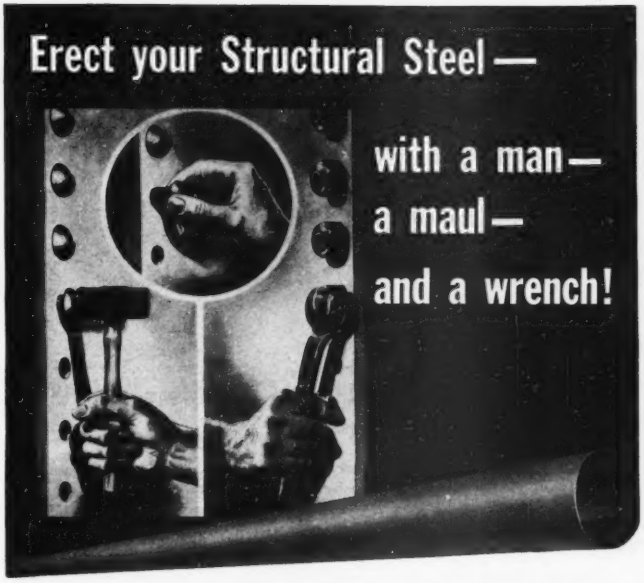

Dardelet "Rivet Bolts" make it possible for you to do just that. And that includes all kinds of building jobs—from the smallest to the largest. These self-locking "Rivet Bolts" are unexcelled for holding steel members together —regardless of the severity of the work they must do. Stronger, faster to handle than rivets, their superiority has been proved in construction as well as in the repair of all kinds of machinery and equipment.

For complete information, and a sample Dardelet "Rivet Bolt," simply fill in and return the coupon.

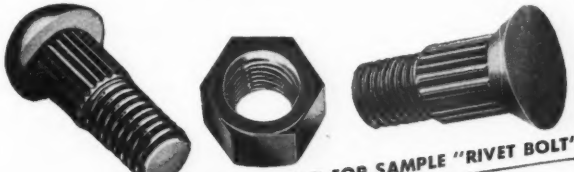

SEND FOR SAMPLE "RIVET BOLT"

United States Steel Supply Company
Dept. B-49, 208 S. La Salle St., Chicago 4, Ill.

Without obligation on my part, please send me a sample Dardelet "Rivet Bolt" and literature on its use.

Title.....

Name.....

Firm Name.....

Street.....

City..... Zone..... State.....

UNITED STATES STEEL SUPPLY COMPANY · USS · STEELS · SERVICE

SYMBOL OF SERVICE · FOR STEEL USERS

UNITED STATES STEEL SUPPLY COMPANY

Warehouses: BALTIMORE · BOSTON · CHICAGO
CLEVELAND · LOS ANGELES · MILWAUKEE · MOLINE, ILL. · NEWARK · PITTSBURGH
PORTLAND, ORE. · SAN FRANCISCO · SEATTLE · ST. LOUIS · TWIN CITY (ST. PAUL)
Also Sales Offices at: KANSAS CITY · PHILADELPHIA · TOLEDO · TULSA · YOUNGSTOWN
Headquarters Offices: 208 S. La Salle St. — Chicago 4, Ill.

USS

UNITED STATES STEEL

THE
New
"CEMENT GUN"
BULLETIN
IS READY!

It is filled with "on the job" pictures and describes many of the varied operations we have performed successfully and economically with "Gunite" and the "Cement Gun".

Photographs cover many types of work including repairs to reservoirs, dams, sewers and bridges. Pre-stressed tanks, swimming pools, steel encasement and pile encasement are included as well as other uses and design data and specifications.

A request on your letterhead will bring you a copy by return mail. Ask for Bulletin X2400.

CEMENT GUN COMPANY
"GUNITE" CONTRACTORS
GENERAL OFFICES—ALLENTOWN, PENNA., U.S.A.
MANUFACTURERS OF THE CEMENT GUN

Use
COMMERCIAL LINER PLATES
in any ground!

MADE IN ANY SHAPE AND RADII FOR HIGHWAY, WATER, AND SEWER TUNNELS

THE *Commercial*
SHEARING & STAMPING CO.
YOUNGSTOWN 1 OHIO

Dallas, structural engr. Zumwalt & Vinther, 1507 Mercantile Bank Bldg., Dallas, mechanical engrs.

Va., Blacksburg—Virginia Polytechnic Institute, Blacksburg, apparatus and piping for power plant addn., from R. H. Lowe, Inc., 125 Salem Ave. W., Roanoke, **$116,754.** Wiley & Wilson, American Bldg., Richmond, consult. engrs. GD 10/11/44—ENR 10/19/44.

●**Va., Lynchburg**—State Hospital Bd., Richmond, Mar. 31, general contract personnel and patients bldgs. at Lynchburg State Colony, from J. A. Jones Constr. Co., 209 W. 4 St., Charlotte, N. C., **$1,367,000.** CD 3/2—ENR 3/10.

CONTRACTS AWARDED

Ala., Birmingham — City, Ramsey High School gymnasium and auditorium addn., and West End High School gymnasium and auditorium addn., to Daniel Constr. Co., 824 7 Ave. S, **$888,686.** Bids 3/30. CD 4/5—ENR 4/7, under LB.

●**N. Y., New York** — Dpt. P. Wks., Municipal Bldg., Zone 7, general contract Chronic Disease Hospital (city nome replacement) Bird S. Coler Memorial Hospital and Home on Welfare Island, to Gerace & Castagna, Inc., 155-10 Jamaica Ave., Jamaica, **$7,663,720*****plumbing, to Jarcho Bros., Inc., 304 E. 45 St., Zone 17, **$1,370,000*****heating, ventilating and refrigeration, to James H. Martin, Inc., 503 W. 43 St., Zone 18, **$944,092.** Grand total $9,977,812. Bids 3/16. CD 3/22—ENR 3/24, under LB.

●**N. Y., Thiells**—Bureau Contracts & Accounts, Albany, 4 infirmary bldgs. at State Hospital for Dpt. Mental Hygiene, to Cauldwall-Wingate Co., 101 Park Ave., New York, Zone 17, **$2,912,000.** Bids 2/16. CD 2/18—ENR 2/24, under LB.

N. C., Lenoir—Caldwell Memorial Hospital, Inc., G. B. Triplett, pres., Lenoir, 100 bed hospital, to McDevitt & Street Co., Builders Bldg., Charlotte, **$618,000.** Bids 3/3. CD 3/8—ENR 3/10, under LB.

●**Pa., Danville**—Dpt. Property & Supplies, 18 and Herr Sts., Harrisburg, general contract, Admission Bldg. 1, at Danville State Hospital, to S. H. Evert Co., Inc., Danville Rd., Bloomsburg, **$1,043,718.** Bids 3/23, awarded 4/4. CD 3/28—ENR 3/31, under LB.

●†**Tenn., Oak Ridge**—U. S. Atomic Energy Comm., P. O. Box 365, Attention Community Constr. Contract Sect., general contract 243 single and duplex family dwelling units, to Maxey & Leftwich, Lubbock, Tex., **$2,833,934;** roadways, sidewalks, sewers, water and gas distr. sys. and landscaping, to Burch Constr. Co., Neff Rd., Dayton, O., **$871,106.** Bids 3/24. CD 3/29—ENR 3/31, under LB.

Tex., Denton—City and Denton, Denton, 28,500 sq. ft. 60-bed masonry Flow Memorial Hospital, concrete pier and beam fdn., to Carpenter Bros., 1335 Plowman St., Dallas, **$599,750.** Bids 3/10, awarded 4/1. CD 3/16—ENR 3/24, under LB.

COMMERCIAL BUILDINGS

BIDS ASKED

April 19

Pa., Phila.—Phila. Bd. City Trusts, 120 S. 3 St., department store alterations, addns. Approx. $250,000. The Ballinger Co., 121 N. Broad St., archt. Lane Bryant, Inc., 12 and Chestnut Sts., lessee. CD 7/23—ENR 7/29.

April 21

S. C., Greenwood—Young Men's Christian Assn., C. Y. Thomason, bldg. chn. City Hall, Y.M.C.A. bldg. Plans deposit $50. James C. Hemphill, Greenwood, archt. CD 3/2/48—ENR 3/11/48.

Tex., Dallas—Kessler Park Methodist Church, 954 N. Wandemere St., masonry chapel and educational church. Approx. $350,000. Plans deposit $15. Bennett & Crittenden, 2812 Fairmont St., archts. CD 5/24/45—ENR 6/14/45.

April 22

Neb., Grand Island—The Sister of St. Francis Hospital, Grand Island, nurses home. $500,000. John K. Monroe, 400 Security Life Bldg., Denver, Colo., engr. and archt. CD 3/18/48—ENR 3/25/48.

April 27

La., Shreveport — Pines Hospital, c/o McClenenghan & Barr, archtis., P. O. Box 4117, hospital addn. $300,000. Plans deposit $25.

●**N. Y., Syracuse**—Business Mgr. Syracuse University, Administration Bldg., gymnasium. $2,000,000. Extended date. Lorimer, Rich & Robbins Conn, 215 Montague St., Brooklyn, archts. CD 3/30—ENR 3/7.

Bids Asked

Ill., Chicago—5485 Everett Corp., c/o D. H. Caplan, 100 N. LaSalle St., 12 story, brick, rein.-con. apartment, $600,000. C. W. Nicol & Assoc., 23 E. Jackson St., archts.

SOON LETS CONTRACT

Calif., Los Angeles—Alex Schreiber & Assoc., Dime Bldg., Detroit, Mich., soon lets contract theatre and bowling alleys in Westchester Dist. $400,000. Extended date. Arthur Froelich, 383 S. Robertson St., Beverly Hills, archt. CD 3/2—ENR 3/10.

●**Calif., Los Angeles**—University of Southern California, 3551 University Ave., soon lets contract 4 story, rein.-con. College of Letters, Arts and Science Bldg., $1,000,000. Marsh, Smith

& Powell, 208 W. 8 St., archts. CD 1/14—ENR 2/3.

●Colo., Lakewood—E. K. Price & Assoc., 410 Security Bldg., Denver, soon lets contract 45,000 sq. ft. shopping center and theatre, $1,500,000. Roland H. Holbrook, 7340 W. Colfax Ave., Shannahan Bldg., Denver, engr. and archt. CD 9/21—ENR 10/7.

Conn., Storrs—Hillel Foundation, c/o Ebbets Frid & Prentice, archts., 862 Asylum Ave., Hartford, soon lets contract 1 story, bsmnt. synagogue. University of Connecticut. CD 3/28—ENR 3/31.

Fla., Miami—West Flagler Baptist Church, c/o Lester Avery, archt., 123 N. W. 12 Ave., soon lets contract church.

Fla., Tallahassee—First Baptist Church, c/o Prentiss Huddleston & Assoc., archts. 2121 N. Adams St., soon lets contract educational bldg., approx. $250,000. CD 3/8—ENR 3/10, under LB.

●Ia., Davenport — St. Lukes Hospital, Bd. Trustees, 1224 E. High St., soon lets contract hospital addn. $1,000,000. S. G. Erickson, c/o Schmidt, Garden & Erickson, 104 S. Michigan Ave., Chicago, Ill., archt. CD 12/14—ENR 12/16.

●Ia., Waterloo—Scholtz Memorial Hospital Bd. Trustees, Presbyterian Hosp. Assn., Waterloo, soon lets contract hospital. **$1,500,000.** Skidmore, Owings & Merrill, 100 W. Monroe St., Chicago, Ill., archts. CD 10/9/46—ENR 10/24/46.

Pa., Pleasant Hills—Pleasant Hills Community Church, Crestview Dr., Pittsburgh, Zone 27, soon lets contract church, Old Clairton Rd., $250,000. Hoffman & Crumpton, 1307 7 St., Pittsburgh, archts. CD 2/2/48—ENR 3/4/48.

Ont., London—M. M. Kalman, archt., 1200 St. Alexander St., Montreal, Que., soon lets contract 2 story, bsmnt., 113x175 ft. I-shaped rein.-con., steel, concrete bldg., Dundas and Colborne Sts., for Westmont Realties Co., 1367 Greene Ave., Montreal, Que. Approx. $450,000. I. S. Backler, 1250 McGill College Ave., Montreal, Que., engr. CD 1/26—ENR 3/24.

LOW BIDDERS

Ala., Mobile—Brothers of Sacred Heart, c/o low bidder, Mar. 29, church, from Butler & Cobbs, Bell Bldg., Montgomery, **$321,640.** CD 3/5—ENR 3/10.

Ga., Atlanta — St. Joseph Infirmary, c/o Abreu & Robeson, archts., 22 Marietta St. Bldg., cancelled bids to have been opened Mar. 31 hospital addn. Project postponed. CD 3/17—ENR 3/24.

●Md., Baltimore—Beth El congregation, 1607 Munsey Bldg., rejected Bids Mar. 4, temple community center. **$1,250,000.** CD 2/17—ENR 2/24.

Mass., Clinton—Clinton Hospital Assn., Clinton, Walter P. Bowers Memorial Hospital, from Granger Contg. Co. Inc., 306 Main St., Worcester, **$529,900.** Coolidge-Shapeley-Bulfinch & Abbott, 1 Court St., Boston, archts. CD 9/13/45—ENR 9/27/45.

CONTRACTS AWARDED

●Calif., Inglewood—Liberty Bldg. Co., 5548 Arbor Vitae, Los Angeles, 104 frame, stucco dwellings, Tract 14159. Owner builds. **$1,300,000.** Harry McDonald, 2011 W. 48 St., Los Angeles, archt.

●Calif., Los Angeles—Encino Park, Inc., 1308 Shatto St., 509 five room, frame, stucco dwellings in Encino Dist. Owner builds. **$3,260,800.**

Calif., Los Angeles—Valleyheart Co., Inc., 1308 Shatto St., eighty 6 room, frame, stucco dwellings, in Van Nuys Dist. Owner builds, **$808,700.**

●Calif., Redwood City—M. J. King, Inc., 231 Franklin St., San Francisco, 500 frame residences, 2 and 3 bedroom, on 103 acre site, Woodside Rd. near Alameda de las Pulgas. Owner builds. **$6,000,000.** J. Lloyd Conrich, 593 Market St., San Francisco, archt. CD 5/7—ENR 5/27.

Fla., St. Petersburg—American Legion Hospital for Crippled Children, c/o contractor, hospital, to Mills & Jones, 2260 4 Ave. S., **$731,481.** Bids 1/7. CD 1/17—ENR 1/20.

●Ga., Columbus—The Camellia Apartments, Inc., c/o contractor, 400 apartment units, Fort Benning Rd., to William Constr. Co., 1032 13 St., Approx. **$1,000,000.**

Ill., Chicago—Owner, c/o R. C. Harriss, archt., 53 W. Jackson St., 15 story, brick, granite, stone apartment, to Kollie Foracher Co., 228 N. LaSalle St. Approx. **$875,000.** CD 1/20—ENR 1/27.

Ind., Kokomo—Hubert Layne, Kokomo, 100 homes, Lafayette Pl., west side of city. Owner builds. **$600,000.**

●La., New Orleans—Terry Ray Homes, Inc., c/o contractor, residential development, to Shelby Constr. Co., 4320 Paris Ave. Approx. **$1,000,000.**

Md., Dundalk—Young Mens Christian Assn., 24 W. Franklin St., Baltimore, 3 story, brick, limestone Y. M. C. A. bldg., to Redding & Co., Inc., 26 E. 25 St., Baltimore, **$545,000.** Awarded 4/5. CD 3/16—ENR 3/24.

●Minn., Minneapolis—C. E. Betcher, Oak Grove Hotel, 20 houses, 4 to 12 units, Wentworth Ave. between 61 and 62 Sts. Owner builds. Approx. **$1,250,000.** I. E. Engler, 1406 West Lake St., archt.

Minn., Minneapolis—House of Vision, 90 S 9 St. bldg. alteration and third floor addn. Owner builds. Approx. **$500,000.** Liebenberg & Kaplan, 51 S. 13 St., archts.

Neb., Omaha—Carl C. Wilson, Inc., City Natl. Bank Bldg., 102 housing units, Spencer



Banish that bucket and dipper health hazard! Use the NEW

DIXIE
WATER CARRIER

CHECKS spread of colds, "flu", and other mouth-to-mouth contagions. Delivers cool, *clean* water right where men are working.

Saves hundreds of man-hours spent in "visiting" and otherwise wasted on trips to get a drink.

Reduces grumbling, complaints — makes for far better labor relations.

Speeds production — helps you maintain schedules.

WRITE FOR DESCRIPTION FOLDER.

Efficient . . . Sanitary
Made for Hard Field Duty

Insulation keeps water cool for hours
Stainless steel interior prevents rust
Lightweight, durable all-metal; olive and chrome
Snap-lock lid for easy filling, cleaning
Recessed faucet provides a steady stream of water
Four gallon capacity
Dispensers for inexpensive Dixie and Vortex Cups—"greatest little cold stoppers in the world"

"DIXIE" is a registered trade mark of the Dixie Cup Company

DIXIE CUP COMPANY
Easton, Pa.

St. and Florence Blvd. day labor. **Approx. $830,000.** Leo Dworak, 651 J. E. George Blvd., archt.

N. J., Paulsboro—Socony Vacuum Oil Co., Paulsboro, engineering administration office, to Mahoney Troast Constr. Co., 1500 Walnut St., Phila., Pa., **$510,000.** CD 3/14—ENR 3/31.

●**N. Y., New York**—New York Life Insurance Co., 51 Madison Ave., 19 story, penthouse, Manhattan House apartment group, 582 units, and garage, 2 and 3 Aves., 65 and 66 Sts., to Cauldwell-Wingate Co., 101 Park Ave., Zone 17. Approx. **$11,000,000-$14,000,000.** CD 8/29/47—ENR 9/18/47.

●**Ore., Portland**—Carl M. Frantz & John F. Haviland, 1123 S.W. 5 St., 12 story, 212 unit rein.-con. apartment, to Reimers & Jolivette, Builders Exchange Bldg., **$2,000,000.** Awarded 4/2. Don Byers, Builders Exchange Bldg., archt.

●**Pa., Holtwood**—Pennsylvania Power & Water Co., 62 N. Duke St., Lancaster, 250 brick, concrete block and frame residential units, separate contracts. **$1,500,000.** Henry Y. Shaub, Lancaster, archt.

Pa., Lancaster—Lawnton Homes, Inc., 85 Spencer Ave., 50 two story brick residential housing units, separate contracts. Approx. **$500,000.** Henry Y. Shaub, Lancaster, archt. Henry E. Huth, 53 N. Duke St., engr.

●**Pa., Lancaster**—McCrory Stores, 1107 Broadway, New York, N. Y., department store, N. Queen and E. Kings Sts., to Robbins Constr. Co., 10 S. 18 St., Phila., **$1,000,000.** William M. Simpson, c/o owner, archt.

●**Pa., Lancaster**—Wheatland Hills Development Co., Lancaster, 600 brick, stone residential units, separate contracts. **$8,500,000.** Owen B. Caldwell, 744 Columbia Ave., archt.

Pa., Littlestown—I. H. Crouse & Sons, Littlestown, 70 brick residential housing units, separate contracts. Approx. **$700,000.** T. A. Monk, Jr., 30 S. Queens St., York, engr. and archt.

●**Pa., Malvern**—Tredyffrin County Club Estates, Paoli, residential development, Tredyffrin and Easttown Twp., to Culhane Constr. Co., Edgemoor, Del., **$2,500,000.** Carroll & Stephenson, 262 S. 15 St., Phila., archts.

●**Pa., Phila.**—Fern Constr. Co., Church Lane and Chester Ave., Yeadon, 296 residences, Revere St., etc., separate contracts. **$2,200,000.** Richard R. Neely, 10 S. 18 St., archt.

●**Pa., Pottstown** — Pottstown Co-operative Housing Projects, c/o contractor, residential development, 3 different locations, to Gordon R. Exley, 2nd, Security Trust Bldg., **$1,500,000.**

Pa., Springfield—M. Bernard Cooper, 4246 W. Thompson St., Phila., residential development, Thomson Rd. and Baltimore Pike, separate contracts. **$797,500.**

Pa., Sunbury—Sunbury Community Hospital, L. G. Farrish, supt., Sunbury, general contract hospital, to Ritter Bros., 1511 N. Cameron St., Harrisburg. **$922,268.** Bids 2/24. CD 3/1—ENR 3/10, under LB.

●**Tex., Dallas**—Clearview Park Inc., c/o D. Elliott & Hub Hill, 2600 S. Hampton St., 300 dwellings, Mountain Lake Rd. and S. Hampton St., own forces. Approx. **$1,600,000;** rein.-con. slab fdns. for 300 dwellings, to R. J. Murphy, 1655 McAdams St., **$65,000.** CD 3/16—ENR 3/31.

●**Tex., Houston**—Frank Sharp, 2202 Rosslyn Rd., 76 residences, on 5 acre tract, incl. paved streets, sewers, water lines, lighting. Owner builds. **$1,000,000.**

Va., Abingdon—Johnson Memorial Hospital, c/o contractor, hospital, to Goode Constr. Co., Johnson Bldg., Charlotte, N. C., **$594,000.** Bids 3/18. CD 3/31—ENR 4/7, under LB.

Alaska, Juneau—Community Building Corp., Juneau, 2 story, bsmnt., concrete office, to R. J. Sommers Constr. Co., Juneau, **$296,946.** CD 4/1.

Que., Montreal—Hotel Dieu Hospital, 100 Pine Ave., nurses home, to J. L. Guay Bros. Ltd., 437 Guy St., Appr x. **$700,000.** CD 8/25/47—ENR 8/28/47.

INDUSTRIAL BUILDINGS

BIDS ASKED

April 20

Minn., Milaca — POWER GENERATING PLANT — Rural Cooperative Power Assn., O. N. Gravgaard, pres., Milaca. 2 diesel engines, auxiliary equip., Minnesota-To-Hennepin. $400,000. Plans deposit $25. R. D. Thomas & Assoc., 400 Metropolitan Life Bldg., Minneapolis, engrs. CD 2/3—ENR 2/17.

Bids Asked

Pa., Lansdale — PRINTING PLANT — Sellers & Lauchman, Main and Wood Sts., (selected list bidders) printing plant addn. $70,000.

Pa., Phila. — BAKERY — General Baking Co., 420 Lexington Ave., New York, N. Y., bakery alterations, addns. Approx. $68,000.

Tex., Irving — GAS TERMINAL — Humble Oil & Refining Co., 2010 McKinney St., Houston, 1 story, irregular shape, structural steel frame, gas terminal addn., etc. $200,000. Le Roy F. Skubic, 53 W. Jackson Blvd., Chicago, Ill., archt. CD 3/16—ENR 3/24.

Ont., Petrolia—PLANT—F. Howlett & Sons, R. Howlett, mgr., Petrolia, brick, tile plant, $100,000.

Ont., Wingham — PLANT — Wingham Mfg. Co., Wingham, 3 story, brick factory, $125,000.

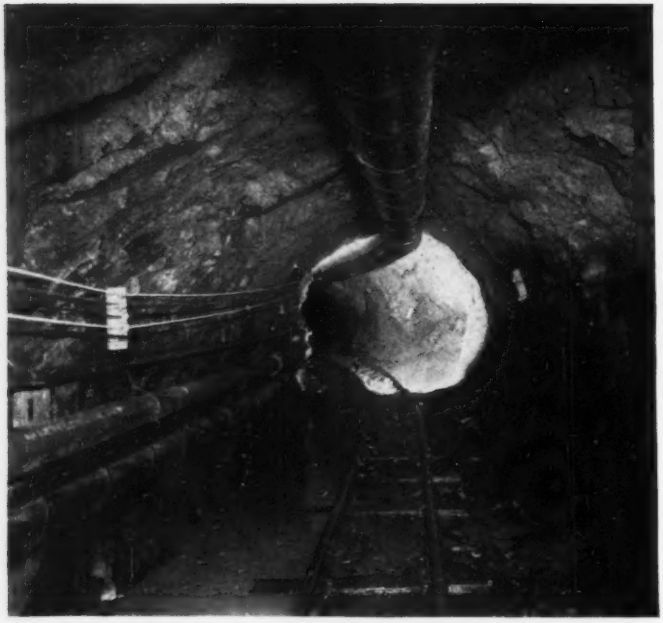

YOU CAN ALWAYS SPOT

NAYLOR PIPE ON THE JOB

IT LOOKS DIFFERENT...IT IS DIFFERENT

Naylor's characteristic Lockseam Spiralweld construction is as distinctive in performance as in appearance. It's because of the lock-seam spirals that Naylor is stronger and safer than ordinary light-weight pipe. This structure assures additional collapse strength and serves as a continuous expansion joint to cushion shock loads, stresses and strains. Naylor Pipe is easy to handle, easy to install and saves material, labor and money right down the line. That's why contractors prefer Naylor on the job. Sizes from 4" to 30" in diameter with all types of fittings, connections and fabrications.

Naylor Pipe

NAYLOR PIPE COMPANY

1248 East 92nd Street, Chicago 19, Illinois

New York Office: 350 Madison Avenue, New York 17, N. Y.

SOON LETS CONTRACT

Kan., Great Bend—GENERATING PLANT—Central Kansas Electric Co-operative, Great Bend, soon lets contract generating plant, extens., administration bldg., Contr. 3, power piping, Contr. 5. A. C. Kirkwood & Assoc., 3102 Troost Ave., Kansas City, Mo., engrs.

Minn., Duluth — WAREHOUSE, etc. — W. H. Zeigler Co., J. G. Lewis, vice pres., 304 Lake Ave. S., soon lets contract one 1 story, 161x181 ft. and one 1 story 43x62 ft., concrete office, repair warehouse, machine shop, $150,000. Hansen & Dobberman, 205 Telegram Bldg., Superior, Wis., archts.

Minn., Rochester — PLANT — Marigold Dairies, R. Graupmann, mgr., Rochester, soon lets contract 2 story, bsmnt, 79x114 ft. plant, $125,000. M. & G. Buetow, 1931 University Ave., St. Paul, archt. CD 3/29—ENR 4/7.

N. Y., New York—GENERATING STATION—Consolidated Edison Co. of New York, 4 Irving Pl., soon lets contract electric generating station alterations at E. 138 St. and Locust Ave. $700,000.

R. I., Pawtucket—AUTO STATION—John F. Hogan, archt., 385 Westminster St., Providence, soon lets contract 1 story, bsmnt., 130x150 ft. brick, cinder block, service and sales auto station, Pawtucket Ave., for B. A. Dario Co., 531 Main St. $125,000.

N. D., Grand Forks—SUBSTATIONS—Minnkota Power Co-operative, Grand Forks, soon lets contract 17 69/12.5 kv. stepdown substations and fifteen 69 kv. threeway switching structures. CD 2/19/47—ENR 3/6/47.

Tex., Dallas—HATCHERY PLANT—Western Hatcheries, Inc., 903 Elm St., soon lets contract 120x203 ft. masonry, structural steel hatchery plant, concrete slab fdn., heating and cooling sys. $100,000. Smith & Warder, Grand Prairie, engrs. and archts.

Tex., Paris — HEADQUARTERS, etc. — Lamoa County Electric Co-operative Assn., Paris, soon lets contract brick, hollow tile headquarters demonstration, garage and storage, concrete frame and slab fdn. $100,000. Wyatt C. Hedrick, 904 Fort Worth Ave., Dallas, archt. CD 8/12—ENR 8/26.

LOW BIDDERS

Calif., San Francisco—WAREHOUSE, etc.—Pacific Container Co., 1455 Vermont St., Mar. 31, 1 story, 134x180 ft., concrete walls and floor warehouse and office, from Tri-City Builders, Majestic Bldg., San Carlos, **$74,308.** CD 3/23—ENR 3/31.

S. C., Greenville—PLANT—Southern Weaving Co., Greenville, exten. present weave room, from Triangle Constr. Co., Greenville, **$94,294.** The McPherson Co., Greenville, engr.

S. C., Laurens—BOTTLING PLANT—Laurens Coca Cola Bottling Plant, Laurens, Mar. 30, bottling plant, from Craig-Roberson Const. Co., 1610 Westminster Dr., Columbia, **$87,774.** CD 3/23—ENR 3/31.

CONTRACTS AWARDED

Calif., Pacific Grove — LAUNDRY — Del Monte Properties, Del Monte, 1 story, 24,000 sq. ft., concrete, wood laundry, to Robert D. Hardell, 2733 Linden St., Oakland. Approx. **$500,000.** Gardiner A. Dailey, 210 Post St., San Francisco, and Skidmore, Owings & Merrill, 1 Montgomery St., San Francisco, archts.

●**Mass., New Bedford**—POWER PLANT—New Bedford Gas & Edison Light Co., 693 Purchase St., Fall River, 4 and 5 story, 55x105 and 40x125 ft., brick, steel, concrete power plant, Cannon St. Station exten., to Theodore Loranger & Sons, 404 Nash Rd., New Bedford. Approx. **$2,500,000** Gilbert Assoc., Inc., 412 Washington St., Reading, Pa., engr.

Okla., Witcher—PLANT—Peppers Refining Co., First Natl. Bldg., Oklahoma City, Zone 2, construct 18 m. per day cu. ft. capacity natural gasoline plant in the Witcher Oil field, own forces. Approx. **$600,000.**

●**Pa., Phila.** — BREWHOUSE — C. Schmidt & Son, Inc., 2 St. and Girard Ave., design and construction 8 story, 40x75 ft., structural steel brewhouse addn., to Kuljian Corp., 1518 Walnut St., **$1,000,000.**

Tex., Dallas—PLANT—Neuhoff Bros., 2821 Alamo St., doubling capacity meat packing plant, to Cedric Burgher Constr. Co., 3027 Main St. Approx. **$750,000.** CD 4/1.

Wis., West Allis—STORES—Wisconsin Electric Power Co., 231 W. Michigan St., Milwaukee, Zone 2, general contract 1 story, 160x208x160x170x245x80 ft., steel, brick cut stone electric distr. stores bldg., concrete fdn., to Thomas H. Bentley & Sons, Inc., 4610 W. Mitchell St., Zone 14. Approx. **$750,000.** Fred A. Luber, Jr., c/o owner, archt.

●**B. C., Ketchikan**—MILL—American Viscose Co., Wards Cove, wood pulp mill, to Morrison Knudsen Co., Inc., 319 Broadway, Boise, Idaho, U. S. A., **$30,000,000.**

UNCLASSIFIED

BIDS ASKED

After April 15

†**Montana**—OUTDOOR SUBSTATION, etc.—U. S. Eng., Fort Peck, 50,000 kva 1.8/115-kv outdoor substation and switchyard, incl., grading, structural excav., backfilling, reinf.-con. fdns., sidewalks, underground conduits, pipelines, overhead steel structures, high and low voltage insulators, cables etc., Serial No. Eng., 24-016-49-70. Plans deposit $25.

FOR TWELVE YEARS

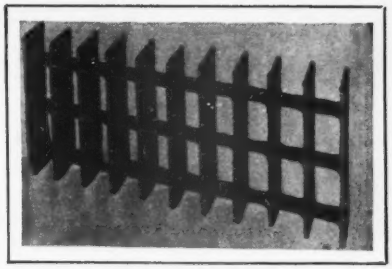

. . . under extreme conditions

The section illustrated was cut from a panel of Hendrick Mitco that for twelve years was in an open yard between buildings in an industrial plant. It not only was exposed to rain, snow and atmospheric corrosion, but was in a drainage area and actually under water much of the time.

The joints show the least corrosion and have no crevices or cracks, although the side surfaces of the bars have been roughened and partially eaten away.

Write for detailed information on Hendrick Mitco Grating, Open Steel Flooring, Shur-Site Treads, and Armorgrids.

SEE OUR CATALOG IN SWEET'S

HENDRICK

Manufacturing Company

45 DUNDAFF STREET, CARBONDALE, PENNA.

Sales Offices In Principal Cities

Perforated Metals
Perforated Metal Screens
Architectural Grilles
Mitco Open Steel Flooring,
"Shur-Site" Treads and
Armorgrids

For NARROW WALLS and HIGH PLACES

FLOORS & DECKS With 24" or 36" Shaft

INCASING BEAMS or REINFORCING MEMBERS

OR USE AS A SPUD

EASY TO CARRY

a real producer

JACKSON

MODEL FS-7A

CONCRETE VIBRATOR

Equipped with a 1¼ H.P. Universal, 115 volt motor producing up to 10,000 V.P.M.; double hand grip-skid type base and toggle switch. Available with either 1¾" x 17", or 2" x 10" vibrator head, and shafting in 24", 36" or 7' lengths; quickly attachable wet or dry grinder. Light enough to be easily carried. Powerful enough to be a big producer on a wide variety of construction. Write for details.

ELECTRIC TAMPER & EQUIPMENT CO., Ludington, Mich.

FOUNDATIONS

PRETEST UNDERPINNING
CONCRETE-STEEL PILES
MASS CONCRETE CONSTRUCTION
HEAVY SHORING
DRILLED-IN CAISSONS

Send for catalogs descriptive of the latest foundation types and methods

SPENCER, WHITE & PRENTIS, INC.
10 EAST 40th ST. NEW YORK 16, N. Y.
602 HAMMOND BLDG. DETROIT 26, MICH.

UNDERPINNING & FOUNDATION CO., INC

Hercules Piles — Caissons — Cofferdams
Arresting of Foundation Settlement
Shafts — Tunnels — Subways — Excavations
Engineering Construction of All Types

NO PROJECT TOO LARGE — NONE TOO SMALL

ENGINEERS & CONTRACTORS
155 East 44th Street New York 17, N. Y.



IS 45° to 65° CONCRETE SPECIFIED?

IT'S EASY WITH THE

IMMERSION METHOD
(PATENTS PENDING)

The Immersion Method will lower plant cost, lower power cost, and maintain accurate water-cement ratio. It is now in use on 2,100,000 c. y. pour at BULL SHOALS DAM, MOUNTAIN HOME, ARKANSAS.

ROYAL McSHEA
COMPLETE REFRIGERATING PLANTS ENGINEERED, SOLD, AND ERECTED
512 EAST TWENTY-FIRST STREET . . . WICHITA 2, KANSAS

April 18

●**Pa., Phila.**—PIER—Dpt. Wharves, Docks & Ferries, Pier 4 South Chestnut St., superstructure Pier 80 completion. Approx. $1,000,000. CD 12/28/45—ENR 1/17/46.

April 20

Arkansas and Missouri — RURAL DISTRIBUTION LINES—Carrol Electric Co-operative, Berryville, 236.5 rural distr. lines, conversion of 60 mi., Stone and Barry Counties, Mo. and Benton, Madison, Van Buren, Carroll, Newton, Searcy and Pope Counties, Ark. $250,000. Frank Horton & Co., Lamar, Mo., engrs.

✦**Fla., Fort Everglades**—PILE DOLPHINS, etc.—J. C. Tily, Officer in Charge of Constr., P. O. Box 365, Dist. Navy Base, Charleston S. C., removing pile dolphins, incl. both steel pipe piles and timber piles, NOY 17176, Spec. 21048.

✦**Fla., Riviera Beach**—ADDITIONAL FACILITIES—J. C. Tily, Officer in charge of Construction, P. O. Box 365, Dist. Navy Base, Charleston, S. C., addnl. facilities at Naval Reserve Training Center, NOY 17538, Spec. 21393. Plans deposit $10.

La., Plaucheville—NATURAL GAS SYSTEM—Town, Town Hall, natural gas sys. **$97,500.** Plans deposit $5. Porter, Barry & Switzer, 211 Main St., Baton Rouge, engrs.

April 22

New York—CANTACT RAIL—Bd. Transportation, 250 Hudson St., New York, Zone 13, installing 150 lb. contact rail for BMT operation to Astoria, Queens Boro, Contr. T-91.

✦**Oregon** — TRANSMISSION LINE, etc.—Bonneville Power Admin., 729 N. E. Oregon St., Portland, Zone 8, clearing right of way for and constructing Lyons-Lebanon 230 kv transmission line, Linn Co., Inv. 4555. Plans deposit $25.

April 25

Mo., Ferguson (St. Louis, Zone 21, P. O.)—SWIMMING POOL, etc.—City, Harry O. Vosburgh, mayor City Hall, 14 Church Rd., concrete swimming pool, concrete bath house, January Wabash Park. Approx. $100,000. Plans deposit $25. Extended date. Wischemeyer & Lorenz, Bd. Educ. Bldg., 911 Locust St., St. Louis, Zone 1, archts. Paul Kloegensmith & Assoc., 4232 W. Pine St., St. Louis, Zone 8, consult. archts. Harland Bartholomew & Assoc., Louderman Bldg., 317 N. 11 St., St. Louis, Zone 1, consult engrs. CD 4/5.

April 26

South Dakota — RURAL DISTRIBUTION LINES—Lake Region Electric Assn., H. L. Wilson, mgr., Webster, approx. 312 mi. rural distr. lines, Day Co. $250,000. Plans deposit $25. Banister Eng. Co., 1549 University Ave., St. Paul, engrs. CD 7/16—ENR 7/29.

Bids Asked

Tex., Dallas — TELEVISION STATION — Lacy-Potter Television, 1519½ Commerce St., 377 ft. steel television tower, 83x85 ft. studio, etc., Grall letters KDTV). $200,000. Pooshee & Cheek, 1901½ N. Harwood St., archts.

SOON LETS CONTRACT

Ia., Sioux City—BASEBALL FIELD—Owner, c/o Wm. Buettiker, archt., Insurance Exchange Bldg., soon lets contract baseball memorial field, $125,000. CD 4/7—ENR 4/29.

Louisiana—RURAL DISTRIBUTION LINES—Louisiana Rural Electric Co-operative, P. E. Roudal, mgr., Alexandria, soon lets contract 217 mi. rural distr. lines, Grant, Natchitoches, Evangeline, Avoyelles and St. Landry Parishes. $252,000. Plans deposit $15. Extended date. Freeze & Nichols, 407 Daniger Bldg., Fort Worth, Tex., engrs. CD 2/11—ENR 2/17.

Mississippi—RURAL DISTRIBUTION LINES—Tombigbee Electric Power Assn., Tupelo, soon lets contract 150 mi. rural distr. lines, Lee Co. Bowman & Bowman, Box 518, Greenwood, engrs. CD 6/4—ENR 6/24.

Missouri—RURAL DISTRIBUTION LINES—Crawford Electric Co-operative, Inc., S. H. Hicks, pres., Bourbon, soon lets contract 240.66 mi. rural distr. lines, Crawford, Franklin, Washington, Gasconade and Dent Counties, Missouri 54H Crawford. Plans deposit $25. Birenbaum & Smith, 5968 Cote Brilliante Ave., St. Louis, Zone 12, engr. CD 3/15—ENR 3/24.

LOW BIDDERS

✦**Arizona and Nevada** — TRANSMISSION LINE — Bureau Reclamation, Dpt. Interior, Aviola Bldg., Phoenix, Ariz., Mar. 25. Coolidge-ED No. 5, 115 kv. transmission line, using (1) aluminum conductor; (2) copper conductor; (3) copperweld-copper conductor, from Vyne Brothers Electric Co., Prescott, Ariz., (1) $200,569 (2) $248,200 (3) $350,825. CD 3/15—ENR 3/17.

●✦**California**—TUNNEL, etc.—Bureau Reclamation, Dpt. Interior, Bldg. 1-A, Denver Federal Center, Denver, Colo., rejected bids Mar. 19, constr. Tecolote Tunnel and access road, Santa Barbara Proj., about 10 mi. west of Santa Barbara Proj., Spec. 2556, L.B. $5,482,865. CD 3/15—ENR 3/17, under LB.

Calif., San Jose — GRANDSTAND — Santa Clara Fair Assn., c/o Bd. Supervs. Santa Clara Co., Courthouse, Mar. 28, 83x400 ft. rein.-con. steel grandstand, horse barn, locker rooms, at Fairgrounds, from Robert L. Wilson, 158 S. Park St., San Francisco, $442,881. (Correction—name of Low Bidder). ENR 4/7, under LB.

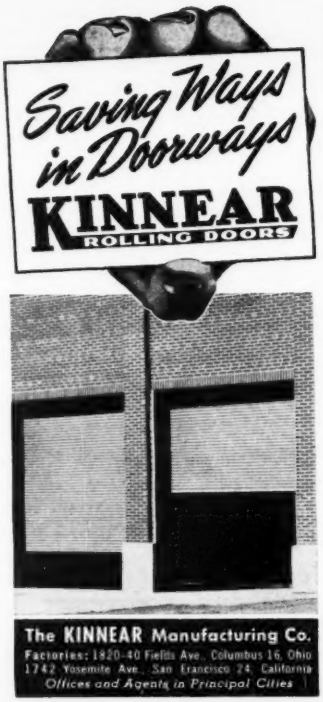

The KINNEAR Manufacturing Co.
Factories: 1820-40 Fields Ave., Columbus 16, Ohio
1742 Yosemite Ave., San Francisco 24, California
Offices and Agents in Principal Cities

Increase Magnetic Cable Life with the

Here's a new, foolproof, magnet reel that operates on a coil spring principle for tension. Built as a combination unit with the Rud-O-Matic Tagline, both the magnet reel and tagline drums revolve together. The tagline cable is attached to the magnet with sufficient tension to steady and the electric magnet cable is then attached with sufficient slack allowed. As both drums revolve both cables are fed back and forth in the same relation as originally set, thus eliminating any chance of the electric cable being pulled apart or being jerked loose from its connections. The unit is thoroughly insulated throughout and comes equipped with a tagline cable and lead sheaves. Available in 5 models to fit the various boom sizes. Immediate deliveries from your equipment dealer—or write—

McGAFFREY-RUDDOCK
Tagline
Corporation

2131 East 25th St., Los Angeles 11, Calif.

Ia., Logan—SWIMMING POOL—City, E. J. Wood, clk., City Hall, rejected bids Mar. 24, rein.-con. swimming pool, wading pool, bath house, filter equip. **$60,000.** CD 3/18.

●**Md., Baltimore**—STADIUM—Mayor & City Council, City Hall, rejected bids Mar. 30, first section stands, utilities, administration bldg., alterations, Municipal Memorial Stadium, E. 33 St., Ia. B. **$1,245,000.** Will re-advertise. CD 4/5, under LB.

Mass., Worcester—PLANTING, etc.—City Housing Auth., 58 Pearl St., Mar. 30, planting, grading and landscape work, Coes Pond Housing, from Littlefield-Wyman, Nurseries, 227 Center Ave., Abington, **$34,497.** Williams & Kunz, 20 Elm St., archts. CD 3/4—ENR 3/17, under Public Bldgs.

Tex., Amarillo—STADIUM—Amarillo Independent School Dist., Amarillo, **Mar. 29, 15,000** seating capacity stadium, from Ramey Mathis Co., Box 6, **$223,033.** Est. $250,000. Grayson Gill, 1913 San Jacinto St., Dallas, archt.

†**Tex., Camp Hood**—PARKING HARDSTANDS—U. S. Eng., 606 Santa Fe Bldg., Galveston, Mar. 29, motor parking hardstands, loading platforms, Inv. No. Eng-41-243-49-228, from H. B. Zachry Co., P. O. Box 2570, San Antonio, **$262,182.** Est. $300,000. CD 3/21.

Wis., Milwaukee—BATHHOUSE, etc.—Milwaukee County Park Comn., Courthouse, Mar. 31, bathhouse and pedestrian bridge at Bradford Beach, from E. C. Knuth & Co., 2919 W. Fond du Lac Ave., Zone 10, **$173,490.** CD 3/8—ENR 3/10.

CONTRACTS AWARDED

Kan., Turner—LOADING DOCK—The Atchison, Topeka, and Santa Fe Ry Co., F. D. Kinnie, ch. engr., Topeka, loading dock and office, to Collins Constr. Co., Land Bank Bldg., Kansas City, Mo., **$250,000.**

Mass., Melrose—FIELD HOUSE—City, Park Comn., Mt. Hood St., field house, high school stadium, to Wexler Constr. Co., Inc., 2 Elm Pl., Brookline, **$53,133.** Bids 3/7, awarded 3/28.

●†**Nebraska**—RAILROAD RELOCATION—U. S. Eng., 601 Davidson Bldg., Kansas City 8, Mo., relocating Oxford Branch of the C. B. and Q. R. R. incl. 19.78 mi. track, roadbed, etc. Franklin and Harlan Counties, Proj. Eng-23-028-49-136, to Morrison-Knudsen Co., Inc., 519 Broadway, Boise, Idaho. **$2,966,000.** Bids 3/11. (**Correction**—status). CD 4/4—ENR 4/7, under LB.

Pa., Harrisburg—DRIVE-IN THEATER—Keystone Drive-In Theatres, 2961 Heather Pl., 750 car open air drive-in theatre to Bernard Flaum, 507 Division St., **$100,000.** W. Walter Whitman, c/o owner, archt. John E. Class, 1007 Melrose St., engr.

●**Texas - Louisiana - Mississippi - Tennessee - Kentucky-Ohio**—NATURAL GAS PIPELINE—Texas Gas Transmission Corp., Owensboro, Ky., gas pipeline from Carthage Gas Field, Tex. to Lisbon, La., to N. A. Slaigh Co., American Hospital & Life Bldg., San Antonio, Tex.***from Lisbon, La. to Mississippi River near Greenville, Miss., to Latex Constr. Co., 2707 Ferndie St., Houston, Tex.***Mississippi River Crossing to Lula, Miss., to O. C. Whitaker Co., Wag Bldg., Fort Worth, Tex.***210 mi. spreads between Memphis, Tenn. and Slaughters, Ky., to Horrigan Constr. Co., Commerce Bldg., Houston, Tex.***180 mi. spreads to Ohio River near Louisville, Ky., to Williams Bros. Corp., National Bank Tulsa Bldg., Tulsa, Okla.***Louisville, Ky. to northern terminus of Lebanon, O. to connect with Big Inch System, to Midwestern Constr. Co., Tulsa, Okla.***compressor stations along line, to Stone & Webster Engineering Corp., Federal Bldg., Boston, Mass. L. E. Ingham, vice pres. will supervise construction for owner. **$73,500,000.** CD 7/6/48—ENR 7/8/48, under CA.

Texas—GAS LINES—United Gas Pipe Line Co., Alamo Natl. Bldg., San Antonio, 16 and 20 in. gas pipelines from Coy City gas fields to Karnes City, Karnes Co., to Massey Pipe Line Constr., Hy. 9, Corpus Christi. Approx. **$70,000.**

Tex., Corpus Christi—GAS LINES—City, c/o Gas Dpt., Corpus Christi, natural gas lines, own forces. **$100,000.** R. P. Ledbetter, city engr. CD 11/19/48—ENR 12/30/48.

Alta., Edmonton—TRANSMISSION LINES—Northland Utilities, Ltd., Edmonton, transmission lines, own forces, **$100,000.**

●**N. S., Halifax**—PIER—National Harbours Bd., West Block, Ottawa, Ont., reconstructing Pier 3, to E. G. M. Cape & Co., 620 Cathcart St., Montreal, Que., Approx. **$2,029,120.** CD 3/15—ENR 3/24.

●**Ontario**—POWER DEVELOPMENT, EXCAVATION—Dir. Supply, c/o Hydro Electric Comn. of Ontario, 620 University Ave., Toronto, diversion channel excav., LaCave power development, incl. Part A, 184,000 cu. yd. and Part B 363,000 cu. yd. excav., to C. A. Pitts Ltd., 67 Yonge St., Toronto, **$1,200,000.** Bids 3/8. CD 2/25—ENR 3/3.

Ont., Toronto—SUBWAY—Toronto Transportation Comn., 35 Yonge St., 8,000 tons unfabricated structural steel for Yonge St. Subway, to Bethlehem Steel Export Corp., Royal Bank Bldg. Bids 2/2. DeLeuw Cather & Co., 29 W. Wacker Dr., Chicago, Ill., U. S. A., engr. CD 1/26.

Que., Quebec City—RADIO STATION—J. N. Thiverge, Radio Station, C. J. M. T., radio station, to Albert Baker, c/o Goodwill Broadcasters of Quebec, Inc., 114 St. John St. Approx. **$65,000.**

Here's the COMPRESSOR for you!



NEW!

. . A new SMITH Compressor with more capacity, smooth operation, economy . . long life!

Powered with a famous CHRYSLER Industrial Engine—3 cylinders for power—3 for compression. Evenly spaced power impulses. Capacity 70 cu. ft. at 80 lbs. pressure. Throttle operates about ⅓ open when operating at 150 lbs. pressure. Built for heavy duty without excess bulk and weight. Engine parts available at Chrysler, DeSoto, Dodge truck dealers.

Write for complete facts about the SMITH Model 250!

Smith AIR COMPRESSORS

GORDON SMITH & CO.
430 College St. Bowling Green, Ky.

WATER IS
"DUCK SOUP"...
WITH COMPLETE WELLPOINTS

Don't let ground water stop you. COMPLETE'S patented, fluted-tube wellpoints won't clog . . . can de-water every type of water-laden soil wherever well-point operation is practicable . . . are the simplest and most economical de-watering equipment known to present day engineering.

Sale or rental. Call "COMPLETE" and forget your water problems.

2 to 5 stage
jetting pumps available

COMPLETE MACHINERY & EQUIPMENT CO., INC.
LONG ISLAND CITY 1, N. Y.
Engineering agents throughout the U. S.

COMPLETE
WELLPOINT SYSTEMS

THESE
RESTORATION
PROBLEMS
Were Quickly and Easily Solved By Our
PRESSURE CONCRETE METHOD!

FACTORY FACADES
GRAIN ELEVATORS
CHIMNEY STACKS
COAL BUNKERS
MINE TUNNELS
RESERVOIRS
BUILDINGS
BRIDGES
CANALS
TANKS
WALLS
DAMS

Write or wire for engineering data and estimates.

HUDSON-RUMSEY CO. INC.
1200 NIAGARA ST BUFFALO, N Y

CONSTRUCTION REPORTS—Third Section

WATER SUPPLY

BIDS ASKED

April 26

Calif., Ione—State Div. Architecture, P. Wks. Bldg., Sacramento, concrete pipelines at Preston School of Industry. Anson Boyd, state archt.

May 2

Colo., Canon City—City, City Hall, water sys. imprvs., incl. basins at reservoir, pipeline in Royal Gorge, intake basin to replace pipe in north part of city, pumping plant, on Arkansas River, west of Sada Point. $330,000. Plans deposit $25. Blackburn Eng. Co., 111 E. 5 St., Pueblo, engrs. and archts. CD 10/29—ENR 11/11.

May 3

†Tex., Camp Hood (br. Killeen)—U. S. Eng., 606 Santa Fe Bldg., Galveston, c.i. waterlines and fire plugs, appurtenances, $50,000; elevated steel water tank and tower, $50,000 near Killeen and Belton.

May 10

Ohio, Brilliant—Bd. Trustees Pub. Affair, Brilliant, Zeolite Water Softening imprv., incl. **(a)** softening equip., **(b)** bldg. to house softening equip., incl. piping, equip., installation; **(c)** lump sum bid for structure equip., complete. $28,000. Plans deposit $5. Burgess & Niple, 568 E. Broad St., Columbus, engrs.

LOW BIDDERS

Ore., Roseburg—Roberts Creek Water Dist., Roseburg, Apr. 4, 300 g.p.m. capacity water filtering plant; furnish low lift and high lift pump; provide intake in South Umpqua River, furnish, lay 18,400 ft. 4-to-10-in. pipe, from P. S. Lord, 4507 S. E. Milwaukee St., Portland, $116,480. CD 3/17—ENR 3/24.

CONTRACTS AWARDED

Ariz., Phoenix—City, WW, incl. 6,300 ft. concrete pipeline in water transmission sys., to Vinson Constr. Co., 2020 W. Grant St., $214,452. Awarded 4/6.

Ia., Iowa Falls—City, elevated water tank, to Pittsburgh-Des Moines Steel Co., 1015 Tuttle Bldg., Des Moines, $61,950. Bids 3/31. CD 3/18—ENR 3/24.

●Md., Baltimore—Mayor & City Council, City Hall, 12,500 lin. ft. 30 and 48 in. watermains, etc. underwater sects. across harbor and Patapsco River, Lazaretto-Fort McHenry-Fairfield watermains, to McLean Contg. Co., 1301 Fidelity Bldg., $1,866,000. CD 4/5—ENR 4/7, under LB.

SEWERS, WASTE DISPOSAL

BIDS ASKED

April 19

Ont., Toronto—Municipality, Chn. Bd. Control, sewers in Clifton Rd., Edward St., lane West of Yonge St., and lane east of Yonge St. Murray Stewart, city engr. CD 4/10/44—ENR 8/24/44.

April 21

†N. M., Albuquerque—U. S. Eng., P. O. Box 1538, main outfall sewers, 4 mi. southeast of here, Serial No. 291-49-93. Extended date. CD 4/5—ENR 4/7.

April 25

Calif., Fresno—City, 2326 Fresno St., Fresno, approx. 5 mi. rein.-con. sanitary sewers. Over $50,000. Plans deposit $25. A. Segel, City Hall, city engr. CD 3/20/47—ENR 4/3/47.

Wis., Monona—Village, **(1)**, excavating, laying, backfill 10,415 ft. 8 and 10 in. sewer pipe, 301 ft. manholes; **(2)**, excavating, laying, backfill 6,000 ft. 6 in. service lateral. Plans deposit $10. General Eng. Co., Portage, engr.

April 26

Ind., Jasper—Bd. P. Wks., Jasper, sewage treatment works. $240,000. Couch & Kulin, 2224 Mansur Bldg., 312 E. Washington St., Indianapolis, consult. engrs. Plans deposit $25.

May 2

Minn., Edina (P. O. Minneapolis)—Village, B. Hawthorne, clk., lateral sewer extens. from St. Louis Park. Sewer Districts 21 and 23 into part of Edina north of 44 St. east of State Hy. 100. $100,000. P. W. Smith, village engr.

Minn., Fergus Falls—City, I. Mickelson, clk., 20,753 lin. ft. sanitary sewers, and 69 precast concrete manholes $50,000. Plans deposit $15.

Minn., St. Louis Park—Village, J. Justad, clk., sanitary sewer for Sanitary Sewer Dists. 21 and 23. $100,000. W. C. Utton, village engr.

May 9

Nev., Reno—City, City Hall, sewage treatment plant, incl. primary treatment plant, Proj. Unit 2, municipal sewage works enlargement, over $50,000. Plans deposit $30. E. C. Frisch, City Hall, city engr. H. N. Jenks, 63 Crescent Dr., Palo Alto, Calif., consult. engr.

May 15

O., Columbus—City, Elmer A. Keller, dir. Pub. Service, sewage treatment, expan. sludge digestion facilities. $800,000. Plans deposit $25. Extended date. Paul A. Uhlmann & Assoc., 1441 N. High St., engrs. CD 3/9—ENR 3/17.

LOW BIDDERS

Calif., Stockton—Pacific Gardens Sanitary Dist., c/o Bd. Supervs., San Joaquin Co., Courthouse, rejected bids Mar. 7, sanitary sewers, sewage pump. plant, L.B. $117,700. CD 3/16—ENR 3/24, under LB.

Kan., Baldwin—City, rejected bids Mar. 20, sewage plant, L. B. $89,200. Will readvertise. CD 3/8—ENR 3/10.

Wis., Delavan—City, Apr. 1, sewage treatment plant, from Central Contg. Co., 1220 Augusta Blvd., Oshkosh, $192,780. CD 3/10—ENR 3/17.

CONTRACTS AWARDED

N. Y., Amherst—Town, Town Hall, Main St., Williamsville, sewage treatment plant, to Riedler Bros. & Bennett, Inc., 506 Morgan Bldg., Buffalo, $607,900. CD 3/17—ENR 3/24, under LB.

BRIDGES

BIDS ASKED

STATE HIGHWAY LETTINGS

April 19
Kansas
South Carolina
April 20
Maine
New York
April 22
Kentucky
April 27
Texas
April 28
New Jersey
April 29
Pennsylvania
May 3
Oklahoma

LOW BIDDERS

New Hampshire—State Hy. Dpt., Concord, Apr. 7, 165 ft. span rein.-con. arch bridge and 0.82 mi. surface treated gravel approaches, Rt. 111, Proj. No. S-28 (1), Hollis, from Clayton W. Chase, Milford, $148,553. CD 3/25—ENR 3/31.

CONTRACTS AWARDED

Arizona—State Hy. Dpt., Phoenix, bridge over Gila River, Greenlee Co., to Vinson Constr. Co., 2020 W. Grant St., Phoenix, $249,499. Bids 3/24, awarded 4/4. CD 3/14.

Arizona—State Hy. Comn., Phoenix, railroad bridge and overpass over Gila River, Greenlee Co., to Vinson Constr. Co., 2020 W. Grant St., Phoenix, $349,499. Awarded 4/7.

Arkansas—State Hy. Dpt., Little Rock, 7 bridges, Montrose-Lake Village Rd., Chicot Co., to M. & W. Constr. Co., Tupelo, Miss., $169,500***bridge across Fifteen Mile Bayou, Marion, Crittenden Co., to Consolidated Constr. Co., 1489 Thomas St., Memphis, Tenn., $57,427 ***overpass over Rock Island R. R. tracks, Fordyce, Dallas Co., to Cook Constr. Co., Standard Life Bldg., Jackson, Miss., $149,742 ***bridge, approaches over Spring River, Walnut Ridge, to E. E. Barber, Ft. Smith, $209,392. Bids 4/4. Grand total $586,151. CD 3/30.

●Md., Baltimore—Mayor & City Council, City Hall, Waterview Ave. Underpass and Interchange thru (limited access) Hy., Baltimore-Washington Annapolis Ave. and Waterview Ave., Baltimore F. A. P. RD U 1465 (5) to The Leo Butler Co., Silver Spring, $1,448,977. CD 3/22—ENR 3/24, under LB.

●New Jersey—State Hy. Dpt., Trenton, superstructure Island Heights—Seaside Heights Bridge, Contr. 2, Route 37, Ocean Co., to Ole Hansen & Sons, Inc., Pleasantville, $1,330,138. Est. $1,543,729. Bids 4/7. CD 3/11—ENR 3/17.

STREETS AND ROADS

BIDS ASKED

STATE HIGHWAY LETTINGS

April 19
Kansas
Maryland
New York
South Carolina
April 20
Maine
April 22
Kansas
Kentucky
Missouri
April 25
Kansas
April 26
Texas
Wisconsin
April 27
California
Texas
April 28
New Jersey
April 29
Pennsylvania
May 3
Oklahoma

April 19

Minn., Duluth—City, C. D. Jeronimus, clk., constr., repairing, relaying sidewalks in city for season of 1949, approx. $50,000. A. W. Tews, city engr.

(Continued on page 166)

When Clyde Portable Builders Towers go up ..... Material handling costs go down

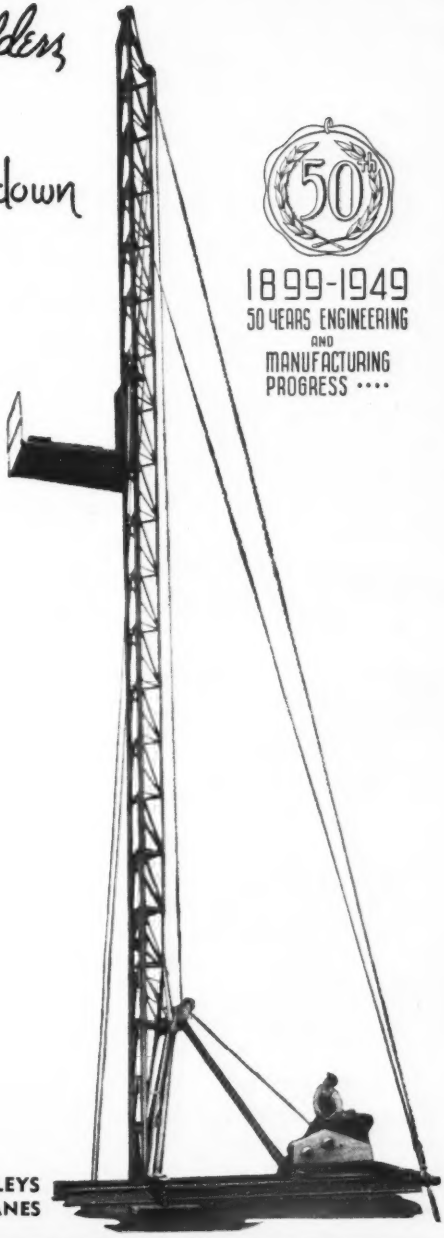

50TH

1899-1949
50 YEARS ENGINEERING
AND
MANUFACTURING
PROGRESS ....

Clyde Portable Builders Towers are specially engineered for high speed, low cost material handling on building projects. They are easy to transport from job to job . . . load the entire machine on a truck or tow it on trailer wheels. They are simple to erect and just as simple to take down.

Towers are assembled in complete safety on ground and raised to operating position by their own hoist. No erection hazards . . . no special equipment needed. Towers up to and including 100 ft. in height are raised in this manner.

Two sizes available.

MODEL PBT . . . 40 ft. tower with 10 ft. extensions to 70 ft. Load capacity 2000 lbs.

MODEL HPBT . . . 40 ft. tower with 10 ft. extensions to 100 ft. Load capacity 2500 lbs. Platform, both models, 5'6"x6'6".

ACCESSORIES: 2000 lb. capacity derrick that mounts on top of tower . . . ½ yd. concrete bucket to be used in place of elevator platform . . . trailer wheels for towing entire machine by truck or tractor.

●

HOISTS . . . DERRICKS . . . CAR PULLERS . . . WHIRLEYS . . . BUILDERS TOWERS . . . ROLLERS . . . HANDI-CRANES

CLYDE

CLYDE IRON WORKS, Inc.

Duluth 1, Minnesota

A Subsidiary of Barium Steel Corporation — Steelwright to the Nation

Hi-BOND Re-Bars
Structural Shapes

Reinforcing bars, structurals, plates, sheets, wire mesh, metal lath, bolts, etc. Our engineers co-operate from first plans to finished job. Send blue prints for lump sum or pound quotation. Re-bars cut, bent and delivered as needed, tagged for quick placement. Write for new Hi-Bond Re-Bar Bulletin, showing how to improve work and cut costs.

Joseph T. Ryerson & Son, Inc., New York, Boston, Philadelphia, Detroit, Cincinnati, Cleveland, Pittsburgh, Buffalo, Chicago, Milwaukee, St. Louis, Los Angeles, San Francisco.

RYERSON STEEL

ENGINEERS
Said it couldn't be done

Brunson has proved that hyper-sensitive surveying instruments can be engineered and constructed with the freedom of motion provided by ball bearings—by producing vastly superior instruments which retain their accuracy under the most adverse conditions.

Precision surveying instruments
Transits, Levels, Rods, Tripods.

LASTING BRUNSON ACCURACY

distributed by
CHARLES BRUNING COMPANY, INC.
4734-9 Montrose Ave. • Chicago 41, Ill.

(Continued from page 164)

April 28

†**N. Y., Bellmore**—Pub. Wks. Office, New York Naval Shipyard, Brooklyn, Zone 1, paving, roadway, installing one dry well catch basin and 15 lines precast concrete duct across highway at Naval Communications Station, Spec. 21274. Plans deposit $10.

LOW BIDDERS

Arizona—State Hy. Comn., Phoenix, Mar. 4, bit. surf. 4 mi. Phoenix-Yuma Hy., near Wellton, Yuma Co., from Western Construction, Inc., El Paso, Tex., **$196,617.** CD 2/25.

Ariz., Phoenix—City, street imprv., bit. surf., from Benton Contg. Co., 151 W. Watkins Rd., **$93,646.** CD 1/6—ENR 1/20.

California—State Div. Hys., State Bldg., Los Angeles, Mar. 31, plant mix surf. 4 mi. between Long Point and 13 mi. west of Running Springs, San Bernardino Co., from Fredericksen & Kasler, 212 14 St., Sacramento, **$779,094.** CD 3/7—ENR 3/10.

California — State Div. Hys., Sacramento, Apr. 6, untreated rock surf. apply Class B, double seal coat 4.1 mi. to central portion and penetration treatment to shoulders between east city limits of Oroville and Feather River Bridge, Butte Co., from Rice Brothers, Box 1489, Marysville, **$58,224*****place untreated rock base over existing pavement and plant mix surf. 5.2 mi. between Brennan Rd. and easterly San Joaquin Co. line, San Joaquin Co., from Granite Constr. Co., 900 Watsonville, **$89,435*****plant mix on cement treated imported sub-base, material surf. 4.3 mi. San Julian Rd. between Jalama Rd. end, Route 149, Santa Barbara Co., from Rand Constr. Co., Inc., Bakersfield, **$305,457*****grading, constr. grade separation structure, 4.4 mi. between Spring Hill and Weed, Siskiyou Co., from Harms Brothers, 5162 Stockton Blvd., Sacramento, and F. Fredenburg, 1717 Garibaldi Ave., Temple City, **$349,750.** CD 3/14—ENR 3/17.

Calif., Los Gatos—Town, 110 E. Main St., Los Gatos, imprv. streets, from Leo Piazza, 175 S. Montgomery St., San Jose, **$141,990.**

CONTRACTS AWARDED

Arizona—State Hy. Dpt., Phoenix, bit. 4.75 Black Canyon Hy., Maricopa Co. to Arizona Sand & Rock, S. 7 St., Phoenix, **$362,585.** Bids 3/24, awarded 4/4. CD 3/14.

Arizona—State Hy. Comn., Phoenix, grading, draining, base material, bit. 1 mi. Clifton-Morenci Hy., Greenlee Co., to Fisher Contg. Co., 2201 S. 19 St., Phoenix, **$222,514**; grading, draining, bit. 4¾ mi. Maricopa Co., to Arizona Sand & Rock Co., S. 7 St., Phoenix, **$362,585.** Bids 3/29, awarded 4/7. CD 3/18.

Arkansas—State Hy. Dpt., Little Rock, gray. base course, bit. 8.8 mi. Hy. 270, Pine Bluff, Jefferson Co., to Reynolds & Williams, Tyler, Tex., **$301,422*****gray. base, bit. 614 mi. Hy. 79, Hughes, Lee and St. Francis Counties, to W. W. Keaton, 115 N. Spring St., Little Rock, **$333,053*****gray. base, bit. 6.14 mi. State Hy. 68, Fayetteville, Washington Co., to Southeast Constr. Co., 1275 Main St., Pine Bluff, **$169,480.** Bids 4/8. Grand total $803,975. CD 3/30.

New Jersey—State Hy. Dpt., Trenton, 2.041 mi., divided highway paving, Rt. 28, Sect. 28, Hunterdon Co., to A. J. Cunningham & Sons, 370 Newark Ave., Trenton, **$597,243.** Est. $720,000. Bids 4/7. CD 3/21—ENR 3/24.

Tex., Bishop—City, John G. Michalk, mayor, Bishop, asph. paving, grading, relaying waterlines where required, to J. N. Sanford, Kingsville, **$65,000.**

Wash., Seattle—City, County-City Bldg., Zone 4, grading, paving Campus Parkway, 10 to 15 Aves. N. E., to Northwest Constr. Co., 3950 6 Ave. N. W., Seattle, **$99,434,** Est. $102,789. Bids 4/8. CD 3/20.

EARTHWORK, WATERWAYS

CONTRACTS AWARDED

Ariz., Phoenix—Salt River Valley Water Users Assn., 145 W. Van Buren St., floodgates on Horsesshoe Dam, to Daley Constr. Co., 2409 S. 16 St., **$465,400.** Awarded 4/4.

●†**Louisiana**—U. S. Eng., foot of Prytania St., New Orleans, Zone 3, 3,840 cu. yd. semi-compacted embankment, etc., Morganza Control Structure, Point Coupee Parish, Serial No. Eng-16-047-49-239, to Grenada Dam Constructors, Inc., P. O. Box 1105, Grenada, **$1,555,143** Est. $1,250,000. CD 4/5—ENR 4/7, under LH.

†**Wash., Everett**—U. S. Eng., 4735 E. Marginal Way, Seattle, Zone 4, dredging 110,450 cu. yd. material from shoals areas in harbor, to General Constr. Co., 540 Iowa St., Seattle, **$32,803.** Est. $33,135. Bids 4/5. CD 3/15—ENR 3/17.

LOW BIDDERS

La., Chalmette — Police Jury St. Bernard Parish, Chalmette, 2,000 cu. yd. channel excav., from C. W. Volhmer & Co., P. O. Box 520, Franklin **$59,675.**

●†**Montana** — Bureau Reclamation, Dpt. Interior, Old High School Bldg., N. Warren St. Helena, Apr. 6, Canyon Ferry Dam, Power Plant, Canyon Ferry Unit, Missouri River Basin Proj., on Missouri River, 16 mi. northeast of Helena, Spec. 2585, from Canyon Constructors, Los Angeles, Calif., **$11,896,425.** CD 2/23—ENR 3/10.

AIRPORTS AND AIRBASES

BIDS ASKED

April 20

Colo., Grand Junction—AIR TERMINAL—City, City Hall, 1 story, part bsmnt., 50x194 ft., brick air terminal, Walker Field, $70,000. Extended date. Smith Hegner & Moore, 505 First Natl. Bank Bldg., Grand Junction, engrs. and archts. CD 3/14—ENR 3/17.

April 29

†**Conn., Windsor Locks** — WAREHOUSE — U. S. Eng., Bldg. 21, Naval Drydocks, South Boston, Mass., 37x288 ft. warehouse, at Bradley Field. CD 4/4/48—ENR 6/17/48.

May 2

Puerto Rico—AIRPORT—Puerto Rico Transportation Auth., San Juan, Isla Verde Airport clearing, grading, drainage, sys., Projs. No. 9-53-001-701 and No. 9-53-001-902. Plans deposit $100. CD 10/18—ENR 11/4.

May 5

†**Wash., Walla Walla** — APARTMENTS — U. S. Eng., 19 E. Poplar St., converting 6 bachelor officer quarters at Walla Walla Air Base into apartment bldgs. Col. Wm. Whipple, dist. engr.

CONTRACTS AWARDED

†**Alaska, Fairbanks**—AIRPORT—Civil Aeronautics Admin., Box 440, Anchorage, airport, near here, Inv. No. 849-842, to Morrison-Knudsen Co., Inc., 319 Broadway, Boise, Idaho, **$2,-845,728.** Bids 3/15. CD 2/10—ENR 2/17.

PUBLIC BUILDINGS

BIDS ASKED

April 20

Kan., Kansas City—Bd. Pub. Utilities, chemical bldg. and boilers. $50,000. Burns & McDonnell, 95 and Troosts Sts., Kansas City, Mo., engrs. CD 11/24—ENR 12/9.

April 25

Conn., Weston—Town School Bldg. Comn., Westport, 1 story, bsmnt. school and bus garage, Weston Rd. $750,000. E. P. O'Dwyer, Westport, archt. CD 1/17—ENR 1/27.

After April 25

N. C., Pinehurst—Moore County Hospital, Pinehurst, hospital alterations, addns. W. W. Hook & Assoc., 305 4 St., Charlotte, archts.

April 26

Conn., Simsbury—Town, Paul D. Collier, chn. Bldg. Comn., Central School addn., incl. 6 classrooms, kindergarten, gym. and auditorium and health depts. library, etc. Approx. $250,000. Carl J. Malmfeldt & Assoc., 36 Pearl St., Hartford, archts. CD 12/8—ENR 12/23.

April 28

Wis., Port Washington—Bd. Educ., Port Washington, 2 story, bsmnt. school. Plans deposit $50. Foeller, Schober, Berners, Safford & Jahn, 310 Pine St., Green Bay, archts. CD 12/17—ENR 1/7.

May 3

Neb., Blair—City, power plant imprvs., incl. power piping, power wiring, bldg. constr. $70,000. Black & Veatch, 4706 Broadway, Kansas City, Mo., engrs. CD 3/1.

May 5

†**Neb., Alliance**—Nebraska Natl. Guard, State Bldg., Lincoln, motor vehicle storage bldg., $85,000.

Wash., Seattle—School Bd., 810 Dexter Ave., Fauntleroy School addn. $350,000. G. W. Stoddard & Assoc., 1213 Westlake Ave. N., archts.

May 9

†**Neb., Kearney** — Nebraska Natl. Guard, State Bldg., Lincoln, motor vehicle storage bldg. $85,000.

May 10

Ia., Forrest City—City, Forrest City municipal light & power plant extens., Sect. 1, diesel generating units and auxiliaries; Sect. 2, bldg. constr. and imprvs. plant bldg; Sect. 3, electrical work incl. switchboard, bus structure, new feeding cable and wiring. Over $70,000. Stanley Eng. Co., Hershey Bldg., Muscatine, engr.

May 20

†**Ark., Little Rock**—U. S. Eng., 300 Broadway, Little Rock, managers residence, two duplex dwellings, nurses' home and attendants' quarters for Veterans Hospital, Inv. No. Eng-03-050-49-62.

LOW BIDDERS

Ark., Fayetteville—University of Arkansas, Fayetteville, Mar. 29, fine arts bldg., from Harmon Constr. Co., Wallace Bldg., Little Rock, **$656,000.** CD 3/2—ENR 3/10.

Ark., Fayetteville—Washington Co., Fayetteville, hospital, from E. V. Bird Constr. Co., Fayetteville, **$276,940.** CD 3/16—ENR 3/4.

●**Conn., Storrs**—State, Raymond A. Thatcher, comptroller, State Capitol, Hartford, Apr. 6,

MONEY-MAKING

MIXERS



CMC 56-S TWO-YARDER

Specifically designed to facilitate increased Central Plant production on big jobs or in commercial plants. Advanced CMC engineering and features assure FASTER, SMOOTHER, and MORE EFFICIENT operation. Equipped with Timken Bearings throughout. Renewable hardened steel drum liners and hard alloy coated discharge buckets insure extra long life. Hydraulic finger-tip controlled charging and discharging.



NEW CMC 16-S HYDRAULIC

New hydraulic charging makes this new CMC 16-S Mixer the SMOOTHEST, EASIEST-OPERATING mixer on wheels. All spools and cables vulnerable to wear and breakage eliminated. Does away with intricate clutch and brake adjustments. Truly the modern approach to mixing perfection.

CMC 6-S TRAILER

HERE IS THE MOST VERSATILE MIXER ON WHEELS. Superior CMC design assures faster charging. This high-speed non-tilt unit incorporates all the plus-value features that have made CMC mixers "tops in the field."

Write today for latest illustrated catalog and prices.

CONSTRUCTION MACHINERY COMPANIES

WATERLOO, IOWA

Group C, 6 dormitories, Proj. B/A D-111, University of Connecticut, from Gilbane Constr. Co., 90 Calvert St., Providence, R. I. **$1,467,512.** CD 3/17—ENR 3/24.

Fla., Miami Beach—City Council, C. W. Tomlinson, clk., Mar. 30, auditorium, Washington Ave. and 17 St., from Bradford Builders, Inc., 1101 Lincoln Rd., **$735,800.** CD 3/10—ENR 3/17.

Kan., Syracuse—Bd. Educ., Mar. 30, high school, from M. W. Watson, Natl. Bank of Topeka Bldg., Topeka, **$385,000.** CD 4/16—ENR 4/24.

●**Minn., Mankato**—Bd. Educ., Loretta M. Viegel, clk., Apr. 6, general contract high school, from Hagstrom Constr. Co., 1567 Selby Ave., St. Paul, **$1,223,400.** CD 3/2—ENR 3/10.

Minn., Minneapolis—University of Minnesota, R. S. Callaway, purch. agt., 323 Administration Bldg., Main Campus, Apr. 1, general contract 4 story, brick, rein.-con. health service bldg., from Peterson Constr. Co., 620 National Bldg., **$483,900.** CD 3/9—ENR 3/17.

N. M., Portales—Eastern New Mexico College, Apr. 5, student union and women's dormitory, from C. S. Lambie & Co., Amarillo Bldg., Amarillo, **$540,737.** CD 3/1—ENR 3/3.

†**N. C., Fort Bragg**—U. S. Eng., 308 Custom House, Wilmington, Apr. 5, family housing units, Eng. 31-075-49-35, from Worth D. Kenyon, Capitol Club Bldg., Raleigh, **$333,632.** CD 3/4—ENR 3/31.

Tex., Houston—University of Texas, 701 Fannin St., Apr. 5, general contract boiler plant, from W. S. Bellows Constr. Co., 716 N. Everton St., **$436,658;** mechanical work, from C. Wallace Plumbing & Co., 4102 S. Sheperd Dr., **$403,611.** CD 3/21—ENR 3/24.

†**Utah, Monticello**—U. S. Atomic Energy Comn., Grand Junction, Colo., housing, incl. 6 bedroom staff house, three 3-bedroom houses, nine 2-bedroom houses, triple garage, five double garages and two single garages, from Gordon Supply Co., Moab, **$171,000.**

Wis., West Allis—Bd. Educ., 7510 W. National Ave., Zone 14, Apr. 4, general contract 4 story, bsmnt., 152x160½ ft. steel, concrete, brick steel Horace Mann High School, concrete fdn., from Jean Constr. Co., 7232 W. Greenfield Ave., Zone 14, **$449,995.** CD 2/23—ENR 3/3.

CONTRACTS AWARDED

Calif., San Bernardino—San Bernardino Co., Courthouse, San Bernardino County Hospital, incl. boiler room and workshop, laundry addn., and storage bldg., to Kenneth Frazer, 707 S. Arroyo Parkway, Pasadena, **$423,000.** Bids 4/4. CD 3/22—ENR 3/24.

Conn., Manchester—Town, Bd. Educ., Manchester, 1 story, 10 room, Bunce School, Olcott St., to Alexander Jarvis Co., 6 Dover Rd., Manchester, **$624,300.** Bids 3/29. CD 3/15—ENR 3/17.

Fla., Gainesville—State Bd. Control, c/o contractor laundry, at Florida A. & M. College, to Glover Constr. Co., 880 E. Call St., Tallahassee, **$109,920.**

Ill., Mount Vernon—School Dist. 80, Mount Vernon, general contract 1 story, Field Grade School, to J. L. Simmons Co., Inc., 2146 N. Woodford St., Decatur, **$533,553.** Bids 3/1. CD 3/14—ENR 3/17.

●**Ia., Des Moines**—Bd. Educ., 629 3 St., Benjamin Franklin Junior High School, to Weitz Co., Inc., 406 Fleming Bldg., **$1,732,780.** Bids 3/29. CD 4/8—ENR 4/10.

Kan., Goodland — Bd. Educ., Goodland, school, to George Senne & Co., 510 E. 15 St., Topeka, **$250,000.** CD 12/1—ENR 1/6.

●**Mass., Somerville** — City Housing Auth., 34 North St. veterans housing, Charedon Hill, to G. L. Rugo & Sons, 1000 Boylston St., Boston, **$1,612,896.** Bids 2/3, awarded 4/5. CD 3/9—ENR 3/17, under LB.

Ore., Salem—School Dist. 24c-J., Salem, Capitol School and Four Corner School, to Henry G. Carl, Route 8, Box 13, **$264,396** and **$266,397** respectively. Awarded 4/6.

†**Alaska, College**—Pub. Bldgs. Admin., 18 and F Sts., Wash. 25, D. C., 3 story, 52x122 ft. rein.-con. geophysical institute bldg. on piling foundations and 6 houses at University of Alaska, to Lewis Constr. Co., Lowman Bldg., Seattle, Wash., **$720,332.** Bids 3/22, awarded 4/6. CD 3/29—ENR 3/31, under LB.

COMMERCIAL BUILDINGS

BIDS ASKED

April 20

Wis., Green Bay—St. Joseph of Carondelet, Green Bay, 2 story, bsmnt., 79 x 100 ft., steel brick academy addns., boiler and workshop rooms. Extended date. L. A. Geniesse 226 N. Washington St., archt. CD 3/23—ENR 3/31.

Bids After April 25

Ia., Davenport—American Legion Post No. 26, c/o Commander, 200 S. Perry St., rein.-con., brick American Legion Post headquarters, $335,000. Kruse & Parish, Kahl Bldg., archts. CD 12/15—ENR 12/30.

SOON LETS CONTRACT

N. C., Charlotte—American Trust Co., 204 S. Tryon St., soon lets contract bank. J. N. Pease & Co., 119½ E. 5 St., archts.

(Continued on page 169)

Another Job Showing the ADAPTABILITY of ECONOMY STEEL FORMS

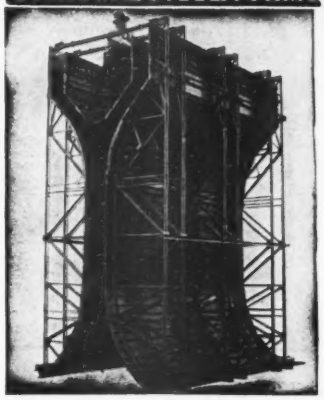

Building 8,000 feet of 20-ft wall? That was one problem in constructing a $9 million sewage treatment plant. Walls had a cross-section as shown above, to supply aeration tanks.

Economy Engineers combined regular Economy form plates with specially designed plates, bracing and trusses, into two sets of wall forms and a center "trough" to provide a uniform 3-section form. After each pour had set, the forms were stripped as units and moved to the next setting.

Approximately half of the form plates were regular units. The balance were made specially for the job—and their cost was more than offset by savings on labor and conventional form material.

This job is another instance proving that, whatever your problem may be, when placing concrete Economy Forms will consistently produce lower over-all forming costs and higher profits.

ECONOMY FORMS CORP.

A nation-wide form rental and engineering service that saves costly material and time in concrete construction. We welcome job inquiries by wire, letter or phone.

HOME OFFICE: DES MOINES, IA.

Branch offices: Dallas, Texas; Decatur, Ga.; Fort Wayne, Ind.; Matuchen, N. J.; Los Angeles, Calif.; Denver, Colorado.

Operators Prefer Yaun

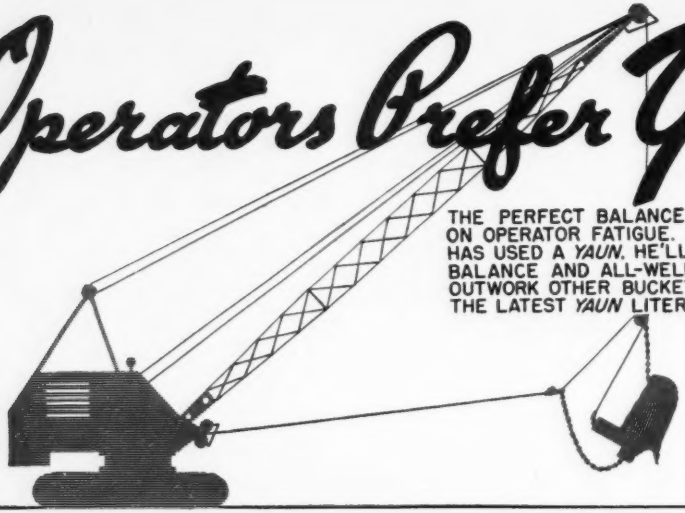

THE PERFECT BALANCE OF A *YAUN* CUTS DOWN ON OPERATOR FATIGUE. ASK ANY OPERATOR WHO HAS USED A *YAUN*, HE'LL TELL YOU THEIR PERFECT BALANCE AND ALL-WELDED CONSTRUCTION WILL OUTWORK OTHER BUCKETS. ASK YOUR DEALER FOR THE LATEST *YAUN* LITERATURE, OR WRITE DIRECT.

YAUN DRAGLINE BUCKETS AND MFG. PLANT

BATON ROUGE, LA.

"GUNITE" CONCRETE (Since 1915)

FOR • STEEL PLATE LINING • STEEL ENCASEMENT • BUILDING NEW WALLS • LINING WATER RESERVOIRS, TUNNELS AND SEWERS • PLATE LINING OF STEEL STACKS, BUNKERS, DUCTS • REPAIR OF DISINTEGRATED CONCRETE AND MASONRY • CANAL, DITCH AND DRAIN LINING.

GUNITE CONCRETE & CONST. CO.
1301 Woodswether Rd., Kansas City 6, Mo.

District Branch Offices

R. N. Turner, Dist. Mgr., 228 No. LaSalle St., Chicago 1, Ill. B. H. Mueller, Dist. Mgr., 6625 Delmar Blvd., University City, (St. Louis), Mo. Philip D. Barnard, Dist. Mgr., 2036 Addison, Houston 5, Tex.

Branch Offices: Denver, Dallas, New Orleans
See our catalog in Sweet's

DREDGES

HYDRAULIC
● DIPPER ●
CLAMSHELL

Bolted sectional steel hulls for landlocked, inland waters
If you need a dredge, write us!

AMERICAN STEEL DREDGE CO. INC.
FORT WAYNE 1 · INDIANA · U.S.A.

DESIGNERS AND BUILDERS OF DREDGING EQUIPMENT SINCE 1905

WELDING CONNECTORS

Saxe System Welded Connection Units for welded assembly

Saxe Units place in position and securely hold together structural parts to be welded.

As used in many welded structures they *eliminate all hole punching*, producing an economical, rigid, safe and quickly erected structural frame.

Write for 58 pg. Manual containing full engineering design information for welded structures.

J. H. WILLIAMS & COMPANY
Buffalo-7, New York
Canadian Representatives
G. D. PETERS CO., Montreal-2, Canada

ERIE
DOUBLE SUCTION
TYPE S
CENTRIFUGAL PUMPS

BELT MOTOR OR ENGINE DRIVE

Sizes From 2" to 12"
Write for Bulletin No. 38

ERIE PUMP & ENGINE WORKS
152 Glenwood Ave. Medina, N. Y.

BAILEY METERS AND CONTROLLERS
FOR SEWAGE TREATMENT AND WATER SUPPLY . . .

BAILEY METERS

● Venturi Tubes, Weirs, Flumes, Nozzles and other primary elements; Mechanically and Electrically operated Registers and Complete Automatic Control Systems.

BAILEY METER COMPANY
1029 IVANHOE ROAD • CLEVELAND, O.
Bailey Meter Co. Ltd., Montreal, Canada

GET **TWICE** THE LIFE AND SAVE WITH

"GUNITE"

Investigate its possibilities. Pneumatically Applied to Any Surface Any Thickness. Bunker Stacks, Tunnels, Reservoirs, Sewers, Walls, Tanks.

Gunite specialists since 1915.
Engineering Data—Estimates

SHOTCRETE CONSTRUCTION CO.
102 Locust St. Garden City, N. Y.
Garden City 7-5451

(Continued from page 167)

LOW BIDDERS

Colo., Ft. Morgan—Ft. Morgan Community Hospital Assn., Ft. Morgan, rejected bids Apr. 6, general contract 2 story, 50 bed hospital, L. B. **$288,437.** CD 3/14—ENR 3/17, under LB.

La., Baton Rouge—Bendernagel & Cazale, archts., 8 Marlborough Gate, New Orleans, Mar. 31, 2 story, brick, parochial school addn., for Sacred Heart Church, from L. A. Spedale, 723 Richland Ave., Approx. **$256,300.** CD 3/21—ENR 3/24.

Neb., West Point—Sisters of Christian Charity, West Point, Apr. 5, general contract hospital, from Olson Constr. Co., 410 S. 7 St., Lincoln, **$749,199**; plumbing and heating from Sutter & Son, South Sioux City, **$149,950.** CD 3/17—ENR 3/24.

Ore., Prineville—Pioneer Memorial Hospital, Prineville, Apr. 6, 35 bed, concrete block, brick hospital, from Riverman & Sons, 2932 N. E. 48 St., Portland, **$264,900.** CD 3/23—ENR 3/31.

Va., Newport News—Calvary Baptist Church, Newport News, church alterations, addns., from Harwood Constr. Co., Newport News, **$255,000.** Williams, Coile & Blanchard, Newport News, archts.

●Calif., San Jose—Biebrach, Bruch & Moore, bedroom residences in Kirkland Villa section of Willow Glen, to Constwise Constr. Co., 1800 Jonathan St., Approx. **$3,000,000.**

Ill., Chicago—Owner, c/o Harold A. Stahl, archt., 111 W. Monroe St., 3 story, brick apartment, 7217 S. Phillips Ave., separate contracts, masonry to Henning Johnson & Sons, 7649 S. State St., Approx. **$250,000.** Harold A. Stahl, 111 W. Monroe St., archt.

Ind., Indianapolis—PLANT—Mouldings, Inc., 730 E. Washington St., 1 story, brick, steel, concrete mfg. plant, S. Holt Rd. and Farnsworth Ave., to Industrial Operations, Inc., 319 N. Penn. St., Indianapolis, Approx. **$500,000.** Awarded 3/30.

●Md., Baltimore—Upland Apartments, Inc., 4625 Edmendson Ave. Unit B one hundred 2 story, brick, block housing, concrete fdns., separate contracts. **$1,699,750.** H. A. Miller, 337 St. Paul Pl., archt.

Md., Baltimore — Young Mens Christian Assn., 24 W. Franklin St., 4 story, brick, steel, rein.-con., Druid Hill Branch (colored) Y. M. C. A. bldg. 7, 1619 Druid Hill Ave., to The Davis Constr. Co., 320 W. 4 St., Zone 8, **$509,659.** Bids 1/13, awarded 4/7. CD 2/2—ENR 2/10, under LB.

N. C., Raleigh—Clark Avenue Apartments, Inc., c/o contractor, housing, Clark Ave., to York Bldg. Co., Capitol Club Bldg., Raleigh, Approx. **$450,000.**

●N. Y., White Plains—Sam Minnkoff & Sons, 521 Fifth Ave., New York, Zone 17, garden apartment development for 500 families on 31 acre site, Bryant and Mamarock Aves. Owner builds. **$2,000,000.**

O., Columbus — St. Joseph's Cathedral, Bishop Michael J. Ready, 212 E. Broad St., two 2 and 3 story, bamnts., stone, limestone, steel and concrete floors, rectory bldgs.; remodeling Cathedral's sanctuary and nartnty, new 5th St. exit, etc., to Trapp Constr. Co., 556 S. Nelson St., Approx. **$500,000.** Bids 2/15, awarded 3/15. CD 2/4—ENR 2/10.

Tex., Dallas—Clearview Park, Inc., 2600 S Hampton St., 200 dwellings, own forces. Approx. **$850,000.** Brown & Brown, 1905 N. Harwood St., archts. CD 3/16—ENR 3/31.

Tex., San Antonio—C. L. Browning, Jr., 811 Insurance Bldg. 175 dwellings, off W. W. White Rd., force account. Approx. **$950,000.** CD 4/1.

INDUSTRIAL BUILDINGS

BIDS ASKED

April 19

Minn., Duluth—WAREHOUSE, etc.—W. H. Ziegler Co., 304 Lake Ave S., J. G. Lewis, vice pres., soon lets contract 2 bldgs., one 1 story, 161x151 ft. and other 1 story, 43x62 ft. concrete warehouse, office, shop. $150,000. Extended date. Hansen & Dobberman, 205 Telegram Bldg., Superior, Wis. archts. CD 4/8—ENR 4/14.

Bids Asked

Conn., Waterbury — TRUCK GARAGE — Borck & Stevens, 925 Housatonic Ave., Bridgeport, 1 story, 85x163 ft., steel, cinderblocks, truck garage, Meriden Rd. $70,000. Fletcher Thompson, Inc., 211 State St., Bridgeport, archt.

SOON LETS CONTRACT

N. C., Winston-Salem—WAREHOUSE—Atlas Supply Co., 236 S Liberty St., soon lets contract 4 story, warehouse addn. Macklin & Stinson, 226 N. Trade St., engrs. and archts. Extended date. CD 2/20—ENR 4/7.

Proposal Advertisements see pp. 169 to 171 and 191—Proposed Projects see p. 132

OFFICIAL PROPOSALS

Bids: May 2, 1949 (973)

Clearing, Grading and Drainage System of Airport

The Puerto Rico Transportation Authority will receive sealed bids for Clearing, Grading and Drainage System of the Puerto Rico International Airport, Projects No. 9-53-001-701 and No. 9-53-001-902 San Juan, Puerto Rico, until *2:00 P. M.* (Atlantic Standard Time) on the *second* day of *May*, 1949, at San Juan, Puerto Rico, at which time and place all bids will be publicly opened and read aloud.

The bidders will be required to submit proposal for both projects. Proposal for only one of the Projects will not be accepted.

The successful bidder will be required to furnish satisfactory performance and payment bond or bonds.

All bids shall be based on wage rates not less than the minimum wage rates as predetermined by the Secretary of Labor of the United States, schedule of which is included in the Specifications.

Attention is called to the fact that the project is exempted from the 3% Insular tax on public works contracts.

Proposed forms of contract documents, including plans and specifications, are on file at the office of the Chief Engineer of the Puerto Rico Transportation Authority, at San Juan, Puerto Rico.

Copies of the documents may be obtained by depositing $100.00 with the Puerto Rico Transportation Authority for each set of documents so obtained. The amount of the deposit will be refunded to each person who returns the plans and documents in good condition within 10 days after the opening of bids.

The Puerto Rico Transportation Authority reserves the right to reject any or all bids and waive any informalities in bidding.

A certified check or bank draft payable to the Puerto Rico Transportation Authority, U. S. Government Bonds, or a satisfactory bid bond executed by the bidder and acceptable sureties in an amount equal to (5%) five per cent of the bid shall be submitted with each bid.

SALVADOR V. CARO
General Manager

Bids: May 2, 1949 (980)

Utility Services for Hangars No. 3 and No. 4

THE PORT OF NEW YORK AUTHORITY
NEW YORK INTERNATIONAL AIRPORT
CONTRACT NYA-20

Sealed proposals for the furnishing and installation of utility services for Hangars No. 3 and No. 4 at New York International Airport, will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1100, 111 Eighth Avenue, New York 11, N. Y., until 2:00 o'clock on the afternoon of Monday, May 2, 1949, and thereafter in the Auditorium of the Authority at the same address until 2:45 P.M., on the same date, at which latter time and place said proposals will be publicly opened and read.

Contract documents may be seen at the office of the Chief Engineer, and copies will be furnished upon deposit of $25.00 per set. The deposit will be remitted if the documents are returned in good condition, not later than thirty days after the opening of proposals.

THE PORT OF NEW YORK AUTHORITY
Howard S. Cullman,
Chairman

New York, April 14, 1949.

Bids: May 2, 1949 (983)

Access Roads and Parking and Storage Areas for Federal Building

THE PORT OF NEW YORK AUTHORITY
NEW YORK INTERNATIONAL AIRPORT
CONTRACT NYA-34

Sealed proposals for the construction of access roads and parking and storage areas for the Federal Building at New York International Airport, will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1100, 111 Eighth Avenue, New York 11, N. Y., until 2:30 P. M., Monday, May 2, 1949, and thereafter in the Auditorium of the Authority at the same address until 3:00 P. M., on the same date, at which latter time and place said proposals will be publicly opened and read.

Contract documents may be seen at the office of the Chief Engineer, and copies will be furnished upon deposit of $25.00 per set. The deposit will be remitted if the documents are returned in good condition, not later than thirty days after the opening of proposals.

THE PORT OF NEW YORK AUTHORITY
Howard S. Cullman,
Chairman

New York, April 14, 1949.

Bids: April 28, 1949 (982)

Switch House for Runways A, B, C and V

THE PORT OF NEW YORK AUTHORITY
NEW YORK INTERNATIONAL AIRPORT
CONTRACT NYA-40

Sealed proposals for the construction of a switch house for runways A, B, C and V at New York International Airport, will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1100, 111 Eighth Avenue, New York 11, N. Y. until 2:00 P. M., Thursday, April 28, 1949, and thereafter in the Auditorium of the Authority at the same address until 2:30 P. M., on the same date, at which latter time and place said proposals will be publicly opened and read.

Contract documents may be seen at the office of the Chief Engineer and copies will be furnished upon deposit of $10.00 per set. The deposit will be remitted if the documents are returned in good condition, not later than thirty days after the opening of proposals.

THE PORT OF NEW YORK AUTHORITY
Howard S. Cullman,
Chairman

New York, April 14, 1949.

U. S. Government

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. 2628) will be received by Bureau of Reclamation, Denver, Colorado, May 10, 1949, and then publicly opened for furnishing two 20,000-kva, 110-kv to 12.47-kv, forced-air-cooled, outdoor, package-type substations: complete for ED2 and ED4 substations, Davis Dam Project, Arizona-Nevada. Delivery is desired within 700 days. For particulars, address Bureau of Reclamation, Building 1-A, Denver Federal Center, Denver, Colorado.

MICHAEL W. STRAUS, Commissioner. (981)

(Continued on page 170)

Contractors Watch This Section —

for new projects. Publish your announcements through the proposal sections of *Engineering News-Record* and get their bids.

U. S. Government
(Continued from page 169)

BIDS FOR BANK GRADER UNITS—Memphis District, Corps of Engineers, P.O. Box 97, Memphis 1, Tenn. Sealed bids will be received here until 11:00 a.m., C.S.T. 26 April 1949, and then publicly opened, for furnishing two mechanical bank grader units each consisting of: a 185' boom diesel electric dragline grader machine; a steel grader barge 130' x 70' x 8'-6"; and a steel mooring barge consisting of 2 sections each 200' x 45' x 9', bolted and welded into one 400' unit. Deposit on plans: $10.00 for dragline grader machine, $15.00 for grader barge, and $15.00 for mooring barge. Information on request. (958)

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. 2624) will be received by Bureau of Reclamation, Denver, Colorado, May 5, 1949, and then publicly opened for furnishing 110,000/2,400-volt, 3,000-kva package-type substation equipment for the Hot Springs substation, Rio Grande Project, New Mexico-Texas. Delivery is desired within 400 days. For particulars, address Bureau of Reclamation, Building 1-A, Denver Federal Center, Denver, Colorado.

MICHAEL W. STRAUS, Commissioner. (979)

OFFICIAL PROPOSALS

Bids: May 5, 1949 (978)

Construction of Sebago Bathing Development

LEGAL NOTICE

Sealed proposals will be received by the Palisades Interstate Park Commission until 3:00 P.M., E.D.S.T., May 5, 1949, for the third step in the construction of the Sebago Bathing Development, located in Harriman State Park, Orange and Rockland Counties, New York.

Work includes the construction of a 200,000 gallon reservoir, water and sewer pumping houses, with equipment, and appurtenant work.

Full information, plans, specifications and proposals may be secured at Administration Headquarters, Palisades Interstate Park Commission, Bear Mountain, New York. Payment for plans will be $10.00.

THE COMMISSION RESERVES THE RIGHT TO REJECT ANY OR ALL BIDS RECEIVED.

Bids: April 29, 1949 (977)

Construction of Mad River Interceptor

Waterbury, Connecticut

Sealed proposals for the construction of the Mad River Interceptor will be received by the Board of Public Works of the City of Waterbury, at its office in the City Hall until 7:00 o'clock P.M., Eastern Daylight Saving Time, on Friday, April 29, 1949, at which time they will be publicly opened and read.

The work to be done consists of the following:

CONTRACT 1—Includes approximately 5,555 lineal feet of reinforced concrete pipe intercepting sewer 30 to 42 inches in diameter in and near the bed of the Mad River and in city streets and factory yards.

CONTRACT 2—Includes approximately 2,880 lineal feet of reinforced concrete pipe intercepting sewer 30 inches in diameter in factory railroad yard.

Proposals may be submitted for each contract separately or on a combined basis.

Plans, contract, and specifications may be obtained by intending bidders applying at the office of the Bureau of Engineering, City Hall, Waterbury, Connecticut, or at the office of Malcolm Pirnie Engineers, 25 West 43rd Street, New York, N. Y., on deposit of twenty-five dollars ($25.00), which sum will be refunded to those submitting bids upon return of plans and specifications in good condition within ten (10) days after award of contract. Non-bidders will receive a refund of fifteen dollars ($15.00) on return of plans and specifications.

OFFICE OF BUREAU OF ENGINEERING
WATERBURY, CONNECTICUT
Henry C. Whitlock, City Engineer

OFFICIAL PROPOSALS

Bids: April 20, 1949 (960)

State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.—Pursuant to the provisions of Chapter 63 Laws of 1936, as amended, and special provisions for projects financed with federal aid funds, sealed proposals will be received until ten-thirty o'clock A. M., eastern standard time on *Wednesday, April 20, 1949* by Henry A. Cohen, Director, Bureau of Contracts & Accounts, *11th* Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., for the following projects: Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts & Accounts, Albany, N. Y., and at the office of the District Engineers noted below, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for plans and proposal forms for each contract containing 1 to 15 sheets is $5.00; 16 to 30 sheets, $10.00; over 30 sheets, $20.00. A refund will be made in full to bidders for the return of one set in good condition within 30 days of award or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

County	Contract No.	Name	Miles	Type	Deposit	Estimated Cost of Work
		DISTRICT No. 1				
		G. L. Nickerson, Dist. Engr., 333 Broadway, Albany, N. Y.				
Essex	RC 49-36	Saranac Lake-Bloomingdale, S. H. 821 Saranac Lake Vill.-Bloomingdale Vill., S. H. 929	6.94	Asph. Conc. Opt.	$10,000 Plans $5.00	$172,000
Washington	RC 49-37	Adamsville-Hartford, S. H. 8101	5.68	Road Mix	$7,500 Plans $5.00	$147,000
Warren	FASS 49-4	Sedom-No. Creek, Co. Rd. 29, Proj. 8223(1)	3.90	I-Beam 41' 81" Conc. Slab 27" Bit. Tr. Gravel	$16,000 Plans $10.00	$275,000
		DISTRICT No. 2				
		L. Ketchum, Dist. Engr., 109 No. Genesee St., Utica, N. Y.				
Herkimer	RC 49-38	Old Forge-Eagle Bay, Pts. 1 & 2, S. H. 8180	4.76	Asph. Conc. Opt.	$7,000 Plans $5.00	$134,000
		DISTRICT No. 3				
		Wm Robinson, Dist. Engr., 301 E. Water St., Syracuse, N. Y.				
Onondaga	OT 49-3	Ont. Thru. Sep. of Gr. on Hopkins Rd., Vine St., N. Y. C. R. R., Buckley Rd.	0.62	IB'S 2 @ 50'; Alpha 2 @ 66'; 2 @ 47'; Conc. Rig. Fr's 56', 43.5' Grd. & Struct.	$65,000 Plans $20.00	$1,117,000
		DISTRICT No. 4				
		A. R. Mulligan, Dist. Engr., Barge Canal Terminal, Rochester, N. Y.				
Genesee	RC 49-39	Bloomingdale Road, (Indian Reservation)	0.02	Alpha ($65.80) Superstructure. Composite Beam 94' 6"	$2,600 Plans $5.00	$46,000
		DISTRICT No. 5				
		C. R. Waters, Dist Engr., 65 Court St., Buffalo, N. Y.				
Chautauqua	RC 49-40	North Clymer-Sherman, S. H. 8468	6.17	Bit. Mac. Pen. Ty. 1 - 5.78 mi. Asph. Conc. Opt. - 0.08 mi. St. or Slag. D. S. T. - 0.31 mi.	$11,000 Plans $5.00	$188,000
Erie	RC 49-22	Main Street, Pts. 3 & 4 S. H. 130 and S. H. 131	2.55	Asphalt Conc. Opt.	$6,000 Plans $5.00	$102,000
Niagara	PSC 7283	City of Lockport Lock St. & Gooding St. with N. Y. C. R. R.	0.26	I-Beam 48½' Conc. 8" Thk. 44' Wdt.	$30,000 Plans $10.00	$547,000
		DISTRICT No. 6				
		H. F. Brumm, Dist. Engr., 30 West Main St., Hornell, N. Y.				
Steuben	RC 49-41	Colloeton-Naples, Pt. 1, S. H. 5611	3.36	Asph. Conc. Opt.	$12,000 Plans $5.00	$202,000
Chemung	RC 49-42	Horseheads-Corning State Hwy. 358 Horseheads-Montour Falls State Hwy. 5208 Horseheads-Cayuta State Hwy. 5432	3.82	Asphalt Conc. Opt.	$9,000 Plans $5.00	$137,000
Tioga	PSC 7688 & 8145	Elim. of Village Streets & Owego-Candor, Pt. 1, S. H. 5429 with Erie R. R.	0.22	Plate Girder 49' Reinf. Conc.	$45,000 Plans $10.00	$800,000
		DISTRICT No. 7				
		R. F. Hall, Dist. Engr., 444 Van Duzee St., Watertown, N. Y.				
Lewis	RC 49-17	Copenhagen, S. H. 937	3.51	Asph. Conc. Opt.	$5,000 Plans $5.00	$98,000
St. Lawrence	RC 49-18	Cranberry Lake-Seveys cors., S. H. 8220	8.52	Asph. Conc. Opt.	$16,000 Plans $5.00	$276,000
		DISTRICT No. 8				
		J. S. Bixby, Dist. Engr., Pleasant Valley Rd., Poughkeepsie, N. Y.				
Orange	RC 49-43	Oxford-Chester, S. H. 5297	2.81	Asph. Conc. Opt.	$8,000 Plans $5.00	$143,000
Rockland	RC 49-44	N. J. State Line-Congers, Pt. 1, S. H. 8448; Congers-Long Clove, S. H. 5002; Rockland Lake-Long Clove, S. H. 8196	3.83	Asph. Conc. Opt.	$6,000 Plans $5.00	$114,000
Columbia	RC 49-45	Hudson-Brick Tavern, Ghent, S. H. 9087	6.31	Asph. Conc. Opt.	$16,000 Plans $5.00	$282,000
Westchester	CC49-1	Cross Co. Parkway to Hutchinson River Parkway (Wartburg Conn.)	0.58	Rigid Frame 87' 6" Span, Ellip. Arch 50' 7½" Span, Conc. Arch 53' 10" Span, Conc. 8" Thk., 24', 12' Var. Thk.	$85,000 Plans $20.00	$1,429,000
Dutchess	FARC 49-1	South S. H. 223 Project No. 1 49 F394(10)		Asph. Conc. Opt.	$25,000 Plans $5.00	$465,000
		DISTRICT No. 9				
		F. W. Donovan, Dist. Engr., 71 Frederick St., Binghamton, N. Y.				
Delaware	RC 49-20	East Branch-Sullivan Co. Line, Pt. 1, S. H. 5383	4.85	Asph. Conc. Opt.	$9,000 Plans $5.00	$155,000

(Continued on page 171)

OFFICIAL PROPOSALS
(Continued from page 170)

DISTRICT No. 10

J. J. DARCY, Dist. Engr., Montauk Hwy. at Little E. Neck Rd., Babylon, L. I., N. Y.

New York	FACBE 49-3	Cross Bronx Expy. (Cont.2X) Highbridge Park Connection Project No. U1084 (12)	0.22	Rigid Frame 87' 8" Conc. 9" Thk. 2 at 36', Var. Wdt.	$66,000 Plans $20.00	$1,200,000
New York & Bronx	FACBE 49-4	Cross Bronx Expy. (Cont. 3) Washington Br. Alterations Project No. U1084 (13)	0.36	Alterations to Br. Conc. 3" Thk. 2 at 33' Wdt.	$43,000 Plans $5.00	$850,000
Nassau	SSP 49-1	Southern State Parkway	4.36	Traffic Driver Misc.—1.82 mi. Asph. Conc. Opt.—2.54 mi.	$70,000 Plans $20.00	$1,000,000
Suffolk	NSP 49-1	Northern State Parkway	4.46	Conc. 8" Thk., 2 at 25'	$60,000 Plans $20.00	$1,000,000

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by cash, draft or certified check payable to the order of "State of New York, Commissioner of Taxation & Finance" for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Law, as set forth in "Instructions to Bidders".

When optional types are permitted on contracts with federal funds, bidders must state in the space provided in the proposal the exact designation of the optional type upon which the proposal is predicated.

The right is reserved to reject any or all bids.

B. D. TALLAMY
Supt. of Public Works

Bids: June 15, 1949 (976)

Yonge Street Subway

TORONTO, CANADA

Sealed tenders, endorsed "Tenders for Yonge Street Subway, Contract S-1" will be received by the Toronto Transportation Commission at its office, 35 Yonge Street, Toronto, until 11:00 o'clock, A.M. Eastern Standard Time, on Wednesday, June 15th, 1949.

The work for which such tenders are invited consists of building approximately 3400 lineal feet of subway of various sections, together with miscellaneous work appurtenant and collateral thereto, as specified in the Contract Documents and shown on the plans. The work is to be constructed generally by what is known as "Cut and Cover Method". The work is located in Front Street between York Street and Yonge Street, Yonge Street between Front Street and Queen Street, with a short section connecting the Front Street section with the Yonge Street section to be built on private right-of-way and passing under privately-owned and occupied buildings in the City of Toronto, as described in more detail in Requirements for Tendering and Instructions to Tenderers.

All tenders must be made upon blank forms of tender as furnished by the Toronto Transportation Commission and included in the Contract Documents, and shall be made in accordance with the provisions contained in said documents.

The successful tenderer will be required to furnish, execute and deliver to the Commission a performance bond satisfactory to the Commission in the amount and within the time set out in the Contract Documents.

The Contract Documents, including plans and specifications, are on file and will be available to tenderers at the office of the Toronto Transportation Commission, 35 Yonge Street, Toronto, on and after Thursday, April 14, 1949. Copies of the Contract Documents may be obtained by depositing One Hundred Dollars ($100.00) with the Commission for each set of documents. The amount of the deposit will be refunded upon return of the plans and documents in good condition within ten (10) calendar days after the opening of tenders.

Each tender must be accompanied by cash or a certified cheque on a chartered bank doing business in the City of Toronto, in the amount of One Hundred and Twenty-Five Thousand Dollars ($125,000.00) payable to the order of the Toronto Transportation Commission.

The Toronto Transportation Commission reserves the right to reject any or all tenders and to disregard any informalities in the tenders or tendering.

No tender may be withdrawn, after the scheduled closing time for receipt of tenders for at least forty-five (45) calendar days.

WILLIAM C. McBRIEN, Chairman,
TORONTO TRANSPORTATION
COMMISSION

"Opportunity" Advertising:
Think
"SEARCHLIGHT"
First

Bids: April 26, 1949 (972)

Grading, Drainage, Structures and Paving

PENNSYLVANIA TURNPIKE
COMMISSION
Harrisburg, Pennsylvania
NOTICE TO BIDDERS

Sealed proposals will be received by the Pennsylvania Turnpike Commission, through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 10:00 A.M. (Eastern Standard Time), the 26th day of April, 1949, and immediately thereafter will be taken to the Public Utility Commission's Hearing Room No. 1, North Office Bldg., Harrisburg, Pennsylvania, and immediately publicly opened and read aloud, for the following contract:

For construction of grading, drainage, structures, and paving of Turnpike Section 24A, part of the Philadelphia Extension, in South Londonderry Township, Lebanon County and Rapho and Penn Townships, Lancaster County, Commonwealth of Pennsylvania. This section being situated as follows:

Beginning at a point 260 feet West of Legislative Route 38032 in South Londonderry Township, at Turnpike Station 209+10 (Lebanon County) thence in an Easterly direction 28,124 feet to a point 3,850 feet East of the Reading and the Cornwall Railroads, Penn Township, at Turnpike Station 196+25 (Lancaster County) a distance of approximately 5.33 miles.

Approximate quantities of the principal items are as follows:

Class I Excavation	1,120,000 Cubic Yards
Class II Excavation	36,000 Cubic Yards
Reinforced Concrete Pavement	166,000 Square Yards
Class A Concrete	3,800 Cubic Yards
Class B Concrete	4,800 Cubic Yards
Plain Steel Bars	802,000 Pounds
Fabricated Structural Steel	877,000 Pounds

Copies of plans, specifications and other contract documents, including cross-sections, are on file and open to public inspection at the offices of the Pennsylvania Turnpike Commission located at Harrisburg, Pennsylvania, on 8 April 1949. Copies of cross-sections may be purchased from the Pennsylvania Turnpike Commission for the sum of Fifty Dollars ($50.00) per set.

Specifications and contract documents, exclusive of cross-sections, may be obtained from the Commission upon deposit of Ten Dollars ($10.00) for each set, such deposits to be refunded in full to any actual bidder upon return of such documents in good condition within five (5) days after the date of the opening of the bids. Refund will be made for all plans, contract documents and cross-sections returned, if the project is withdrawn from letting by the Pennsylvania Turnpike Commission. Remittances are payable to the Pennsylvania Turnpike Commission and must accompany requests for drawings, specifications and cross-sections.

The character and amount of bid security to be furnished by bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

PENNSYLVANIA TURNPIKE
COMMISSION
James F. Torrance
Secretary and Treasurer
Harrisburg, Pennsylvania
1 Apr 49

OFFICIAL PROPOSALS

Bids: April 29, 1949 (946)

Sewerage System and Treatment Plant

The Municipal Authority of the Borough of Mechanicsburg, Penna.

Sealed proposals will be received at the Municipal Building, Mechanicsburg, Penna., until 2:00 P.M., E.S.T. April 29, 1949 for furnishing all necessary labor, materials and equipment, and performing all work for the construction of a Sewerage System and a Sewage Treatment Plant and appurtenances, and will there be publicly opened and read at that time. Separate proposals will be received upon two parts of the project as follows:

Sewerage System—including 83,000 lin. ft., 8" to 18" vitrified sewers; 20,700 lin. ft., 6" vitrified sewer house connections; 340 manholes and other appurtenances.

Sewage Treatment Plant—including Control Building, Primary and Secondary Clarifiers, Primary and Secondary Biofilters, Recirculation Pumping Station, Chlorine Contract Tank, Sludge Digester, Sludge Drying Beds, Roads, Fencing and Specified Equipment and Appurtenances.

Proposals shall be accompanied by certified checks in accordance with the provisions contained in the Specifications and in the following amounts:

Sewerage System—$30,000
Sewage Treatment Plant—$10,000

Copies of the Contract Documents, Plans and Specifications may be obtained from Gannett Fleming Corddry and Carpenter, Inc., Consulting Engineers, 600 North Second Street, Harrisburg, Penna., upon deposit of the following amounts for each set:

Sewerage System — Twenty Dollars ($20.00)

Sewage Treatment Plant—Fifteen Dollars ($15.00)

Full refund will be made to actual bidders for return of one set in good condition within ten days after closing date for receipt of bids; refund for return of all other sets, in good condition within the same period, will be fifty per cent of the deposit.

Gannett Fleming Corddry &
Carpenter, Inc., Engrs.
600 North Second Street
Harrisburg, Penna.

The Municipal Authority of the
Borough of Mechanicsburg,
Penna.

Bids: May 6, 1949 (971)

Overpeck Valley Joint Sewage Works

Sealed bids will be received by the Bergen County Hackensack River Sanitary Sewer District Authority at the Bergen County Administration Building, Hackensack, N. J. until 8:00 P.M., Friday, May 6, 1949, for contract 1 and contracts 6 through 18, and at said place and time will be publicly opened and read aloud.

Drawings and specifications may be examined at the offices of the authority, Bergen County Administration Building, or at the offices of Bogert-Childs Engineering Associates, 624 Madison Avenue, New York 22, N. Y.

Copies of the Contract documents may be obtained at these offices upon payment as follows:

Cont. 1. Drawings $50.
Cont. 1. Specifications $10.
Conts. 6-18. Drawings $10 per contract.
Conts. 6-18. Specifications $10.

New applicants will be denied copies after 5:00 P.M., May 3, 1949.

Upon return of contract documents within 2 weeks after receipt of bids, a bidder will be refunded his deposit and a non-bidder, 50 percent.

Each bidder must deposit with his bid, security in an amount of not less than five per centum (5 percent) of the base bid as provided in the information for bidders.

No bidder may withdraw his bid within 60 days after May 6.

By order of The Bergen County Hackensack River Sanitary Sewer District Authority

Arthur W. Kneerim
Treasurer and Acting Secretary.
March 17, 1949.

SEARCHLIGHT SECTION

EMPLOYMENT • BUSINESS • OPPORTUNITIES • EQUIPMENT—USED or RESALE

UNDISPLAYED RATE:
(Not available for equipment advertising)
$1.20 cents a line, minimum 4 lines. To figure advance payment count 5 average words as a line.
INDIVIDUAL EMPLOYMENT WANTED undisplayed advertising rate is one-half of above rate, payable in advance.
PROPOSALS, $1.00 a line an insertion.

INFORMATION.
BOX NUMBERS care publication New York, Chicago or San Francisco offices count as 1 line additional in undisplayed ads.
DISCOUNT of 10% if full payment is made in advance for four consecutive insertions of undisplayed ads (not including proposals).

DISPLAYED—RATE PER INCH:
The advertising rate is $11.50 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.
AN ADVERTISING INCH is measured ⅞ inch vertically on one column, 3 columns—30 inches —to a page. E.N.R.

NEW ADVERTISEMENTS received by April 19th appear in April 28th issue subject to limitation of space available.

WANTED ENGINEERS

Senior Associate Grades . . . . . $6191 to $6908 per year
Associate Grades . . . . . $5341 to $6058 per year
Senior Assistant Grades . . . . . $4570 to $5048 per year

In Architectural, Civil, Sanitary, Electrical, Mechanical and Structural Specialties.

To prepare plans, specifications and drawings and to supervise construction on a $38,000,000.00 water system expansion program and other municipal projects.

Placement to be made from lists of applicants qualifying in examinations to be held April 22, 1949.

Apply immediately stating background and experience, also grade and specialty in which you are interested, to

DETROIT CIVIL SERVICE COMMISSION
15th Floor, Water Board Building Detroit 26, Michigan

WANTED
CHIEF DRAFTSMAN

age 25 to 50, structural design background with broad supervisory design experience on tunnels, bridges, harbors and municipal work, by Southern engineering firm. Must be able to work with management, lead men and get results. Salary commensurate with ability. Submit record education, experience, availability and references to

P-8532, Engineering News-Record
520 North Michigan Ave., Chicago 11, Ill.

WANTED MAY 1ST
Engineering Graduate, qualified to direct aggregate production in Northwest in connection with large dam project. Deposit located 60 miles from town of any consequence. Must be aggressive and able to supervise project accounting, purchasing, and labor relations. Right man can be built up with this experience as valuable asset to our organization. Write

P-8377, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

WANTED
GRADUATE ELECTRICAL ENGINEERS
Of varying experience for electrical transmission and distribution engineering and design. Location, Western Pennsylvania. Qualifications, experience record, and picture should be submitted with letter of application.

P-8623, Engineering News-Record
330 West 42nd Street, New York 18, N. Y.

WANTED
GRADUATE MECHANICAL ENGINEERS
For Power Station engineering and design. Location, Western Pennsylvania. Qualifications, experience record, and picture should be submitted with letter of application.

P-8624, Engineering News-Record
330 West 42nd Street, New York 18, N. Y.

WANTED—Mechanical and Structural Engineers For designing and detailing work on concrete reinforcement, structural steel and hangar door construction. Requirements are three to four years practical experience or recent graduation from technical school. Desirable working conditions and opportunities for advancement. These openings are with a nationally known steel fabricating company, located in eastern Ohio. Applicants will please submit a record of their qualifications.
P-7737, Eng. N-R. 520 N. Mich. Ave., Chicago

WANTED—Experienced "GUNITE" man to act as working foreman.
Permanent position Florida. Salary and bonus arrangement. State qualifications, experience, references, availability and all pertinent information in first letter.

TWENTIETH CENTURY BUILDERS
401 N. 13th Street, Tampa, Florida

ESTIMATOR

Wanted by expanding concern doing underground power, telephone conduit, water and gas main construction in Boston, Mass. Experienced man preferred. Permanent position. Excellent opportunity for right party. State qualifications, exp., age, former employers references and salary req.

P-8489, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

GRADUATE ENGINEER—WANTED
Graduate engineer with extensive experience in supervising first, second and third class building construction and having a good knowledge of road and utility work. Must be thoroughly capable of supervising field engineers in a program spending several million dollars. Full management of office records and reports also part of duties. Excellent remuneration to qualified man. State age, experience and qualifications in reply.

P-8613, Engineering News-Record
330 West 42nd Street, New York 18, N. Y.

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (18)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

CIVIL SERVICE

WANTED: MAN to supervise construction program for Texas prison system two to three years. Must be able to take full charge of office and field. Apply to O. B. Ellis, Huntsville, Texas giving full particulars.

WANTED: ENGINEER-Estimator able to take off quantities for purchasing. Apply O. B. Ellis, General Manager Texas Prison System, Huntsville, Texas.

POSITIONS VACANT

WANTED—ENGINEERS, Architects, Draftsmen experienced in the design of sewers, sewage treatment plants, water treatment plants and industrial buildings. Also engineers to supervise construction. State qualifications, experience, salary requirements and date available. P-1155, Engineering News-Record.

STRUCTURAL STEEL Designer and Estimator wanted by leading central west fabricator. Permanent position and good opportunity with large well established and growing company. Please state qualifications, past experience and salary requirements. P-8386, Engineering News-Record.

ESTIMATOR AND Sales—Norfolk, Virginia. Salary base with at least 15 years experience in take off pricing and selling in structural and ornamental iron shop. Also one thoroughly experienced structural draftsman. Permanent position. P 8563, Engineering News-Record.

CONTRACTOR'S ASSISTANT—Young, growing firm of general contractors wants an aggressive engineer to handle purchasing and engineering work on commercial and public buildings. Graduate preferred. Permanent position. No traveling. Midwestern location. Salary open. P 8556, Engineering News-Record.

GENERAL CARPENTER Foreman wanted by Contractor operating extensively in the Middle West. Must be good form man, capable of designing form systems and laying out his own work on heavy construction jobs and buildings ranging from $500,000 to $2,000,000 in size. P 8558, Engineering News-Record.

MEN WANTED: Party chiefs and instrumentmen for transmission line traverse and profile surveys. Stanley Engineering Co., Hershey Building, Muscatine, Iowa.

SUPERINTENDENT FAMILIAR with long span reinforced concrete bridge work. Location Eastern Pennsylvania. Send complete resume of record, recent snapshot, salary and availability. P 8573, Engineering News-Record.

ENGINEER, CIVIL, experience in surveying, drafting, quantity estimating and field supervision. Write P.O. Box 755, Langley Field, Va.

WANTED: GENERAL Superintendent and Quarry Foreman with granite experience. Two year job in Southeast. State salary and experience. P-8581, Engineering News-Record.

WANTED: MAN with some experience in estimating steel windows from architects' plans and in making detail drawings for architects' approval. State age, experience and salary desired. P 8628, Engineering News-Record.

POSITION VACANT

LARGE NEW York Construction Company has vacancy for Chief Estimator. Must be familiar with all types of construction and have had a minimum of fifteen years experience. State complete qualifications and include photograph. P-8375, Engineering News-Record.

(Continued on opposite page)

SEARCHLIGHT SECTION

WANTED
Draftsmen—
ARCHITECTURAL and STRUCTURAL

Experienced in industrial building. Applicants please state age, education, previous experience and salary desired. Photograph or snapshot not returnable.

AMERICAN ENKA CORPORATION
ENKA, N. C.
(near Asheville)

ENGINEERS WANTED

Architectural, Civil and Other Specialties are urgently needed by the City of Detroit to prepare plans, specifications and drawings and to supervise and inspect construction on a wide variety of municipal projects. Salary ranges from $3139 to $3590 and $3908 to $4385 a year for a 40 hour week. For information address the

DETROIT CIVIL SERVICE COMMISSION
15th Floor, Water Board Building
Detroit 26, Michigan

MAN WANTED
SALES ENGINEER

For selling and promoting asphalt construction and materials. Permanent position and excellent opportunity for right man. State qualifications and references.

SW-8389, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

SALESMAN

With civil or mechanical engineering background, Italian speaking desirable, to follow contracting trade for sale and rental of Construction Machinery in Metropolitan N. Y. area; car furnished, drawing and commission. Write full details.

SW-8572, Engineering News Record
330 W. 42nd St., New York 18, N. Y.

SALESMAN WANTED

having good contacts among large general contractors in the construction line to sell lumber. Capable of producing substantial business. Experience in lumber business not essential. Write stating age.

SW-8643, Engineering News-Record
330 West 42nd Street, New York 18, N. Y.

WHEN
Answering Advertisements

PLEASE *do not send original letters, certificates or photographs. We cannot be responsible for their return. Please send photostat or carbon copies.*

SALARIED POSITIONS $3,500—$35,000

If you are considering a new connection communicate with the undersigned. We offer the original personal employment service (39 years recognized standing and reputation). The procedure, of highest ethical standards, is individualized to your personal requirements and develops overtures without initiative on your part. Your identity covered and present position protected. Send only name and address for details.

R. W. BIXBY, Inc., 272 Dun Bldg., Buffalo 2, N.Y.

SELLING OPPORTUNITY OFFERED
(Continued from opposite page)

SALES ENGINEER With engineering or architectural training. Experience in sales and estimating of reinforcing bars and steel windows preferred. Location Southeast. State: salary, age, experience, availability and enclose recent snap shot. Southern G. F. Company, 263 Decatur St., S. E., Atlanta, Georgia.

EMPLOYMENT SERVICE

SALARIED PERSONNEL, $3,000-$25,000. This confidential service established 1927, is geared to needs of high grade men who seek a change in connection under conditions assuring, if employed, full protection to present position. Send name and address only for details. Personal consultation invited. Jira Thayer Jennings, Dept. L, 241 Orange St., New Haven, Conn.

POSITIONS WANTED

CIVIL ENGINEER Graduate—Registered and experienced mining engineer. Age 27. Domestic or foreign location; single, no dependents and available on short notice. PW-8480, Engineering News-Record.

GENERAL FOREMAN, shaft, tunnel, quarry, dam, sewer, close, open. General excavation rock. Speak Spanish. PW-8374, Engineering News-Record.

CIVIL ENGINEER—Graduate-Registered, 30 years age. 8 years experience location and topographic surveys, highways, pipelines, heavy construction. Desire position with contractor or engineer in California or nearby state. Available immediately. PW-8566, Engineering News-Record.

CONSTRUCTION SUPT. Civil engr. graduate; 31. Experience includes Field Supt. on large building project. Carpenter and Concrete Foreman on various heavy construction projects. 3½ years Navy Seabees officer. Presently building estimating. Desire permanent association with heavy-building construction contractor in field supervision where opportunity exists for progressive responsibility. PW-8567, Engineering News-Record.

CIVIL ENGINEER, 20 years experience in bridges, highways, sewers, airports; design, construction and administration. Desires permanent position. Mid-West preferred. PW-8408, Engineering News-Record.

SUPT. OR Assistant, shaft, tunnel, dam; quarry, sewer, tunnel, mine, shaft pit, rock specialist. Speak Spanish. Central South America. PW-8372, Engineering News-Record.

ENGINEERS AND FOREMEN

A group of experienced American design and construction engineers as well as a superintendent and various foremen who have worked together in Venezuela for some years on a large project now terminating are interested in forming the nucleus for design and/or construction work sponsored by a prominent American contractor or consulting engineer. Preferred work includes all phases water supply, sewerage or heavy waterfront construction anywhere in Latin America. Open for propositions on salary, contract, or profit sharing basis. Experience records available upon request.

PW-8660, Engineering News-Record
330 W. 42nd Street, N. Y. 18, N. Y.

AVAILABLE
INSPECTOR
CONCRETE and STEEL
Arctic and Tropic Experience

PW-8651, Engineering News-Record
330 West 42nd Street, New York 18, N. Y.

POSITIONS WANTED

SUPT. SHAFT, tunnel, sewer, open, closed. Dam, quarry, general excavating rock. PW-8373, Engineering News-Record.

SURVEYOR, DRAFTSMAN, title surveys experience—construction work. PW-8574, Engineering News-Record.

CONSTRUCTION ENGINEER—Field, Administrative, over 30 yrs. experience organizer, liaison, cost and progress scheduling. Grad. Engr. Licensed. Former positions designer, const. supt., chief engr., project mgr. Industrial, heavy const., housing. Available 3 weeks. U. S. PW-8538, Engineering News-Record.

PROJECT MANAGER: General, Job Superintendent; 30 years experience; heavy and light construction; housing; apartments; schools; hospitals; office buildings; chemical; industrial plants; powerhouses; handle all trades including mechanical and allied work. PW-8576, Engineering News-Record.

ACCOUNTANT, 54 desires location. Prefer foreign. 33 years bookkeeping, cost accounts and other essential. 5½ years in Tropics. Have some knowledge of Spanish. Valid passport. P. O. Box 124, Lenoir City, Tenn.

STRUCTURAL DESIGN Engineer, Graduate C.E., Age 45, 23 years experience designing steel, concrete and timber structures, together with any type of foundation. Thoroughly competent to execute complete structural designs on any type building or waterfront structure, and supervise the execution of working drawings. Correspondence invited for position of responsibility. PW-7208, Engineering News-Record.

CONSTRUCTION OFFICE, payroll, cost-accounting, bookkeeping, typist, 5 years experience, single. Write John Faul, 388 Boulevard, Bayonne, N. J.

STRUCTURAL ENGINEER, 20 years experience, building and tunnel design and supervision; any location considered. PW 8536, Engineering News-Record.

SANITARY, CIVIL Engineer. B.S., M.C.E., married, age 33. Desires permanent position in water supply, sewage treatment or as asst. city engineer. PW 8618, Engineering News-Record.

EXECUTIVE SECRETARY, Stenographer. Engineering office and construction field office experience. Familiar government contracts. Permanent position preferred—temporary considered. PW 8640, Engineering News-Record.

PURCHASING AGENT Or Material man, 30 years field experience in power house-bridge-river and harbor construction, States. PW 8606, Engineering News-Record.

ENGINEER, SANITARY, Civil Grad., 32, single. Experienced in operation and design of water and sewage systems and treatment plants and reinforced concrete design. Also interested in engineering sales and promotion. Available in 30 days. Pres. salary, $6400. Consider any U. S. location. PW 8647, Engineering News-Record.

CONSTRUCTION SUPERINTENDENT — 25 years all types industrial and chemical construction, inspection and liaison. Master mechanic on mechanical installation, piping, detailing and maintenance. Versatile, organizer, field and office management, purchasing, etc. Fine labor relations record and capable of handling problems. Travel, no preference as to location. PW-8664, Engineering News-Record.

CIVIL ENGINEER Graduate, age 27, 5 years experience, structural design detail in power plants and industrial buildings. Background as construction superintendent. Familiar with purchasing, estimating, and field as well as office work. Desires responsible position with contractor or consultant where opportunity for growth and expression is present. Willing to travel, metropolitan N. Y. area preferred. PW-8665, Engineering News-Record.

(Continued on page 174)

MARTINDALE'S
BEVEL ANGLES

Time saver for Drafting Room for Bins, Towers, Hip & Valley Roof Shop Details.

Typical connections and layouts. Formulas, graphs and tables of Bevel Angles for three dimensional connections.

Published by
FRANK L. MARTINDALE
2216 Chestnut St.
Philadelphia 3, Pa.
Price $7.50 postpaid
Circular on request.

LEARN TO ESTIMATE

Today, more than ever before, you must know how to analyze building costs. If you want to become a successful builder, learn how to prepare a correct estimate in a hurry. Get in on the profitable work now available wherever you turn. Your success is assured if your estimates are right; otherwise you are licked before you start.

The Tamblyn System of Estimating will make a real estimator out of you in a few weeks of your spare time. We are so sure that you will want to learn it, that we will send you our complete home study course for ten days examination absolutely free. If you don't think it is the finest thing you ever saw, just return it and it won't cost you a cent. If you like it and want it, send us $8.75 when 10 days are up and $7.50 per month until $30.75 is paid.

This estimating system is based on forty years of actual construction experience. It has been sold all over the world for more than twenty years. Thousands of estimators and contractors swear by it. Our offer isn't hot air and big talk. We don't give you a diploma or a lapel button, but we do teach you down to earth estimating which will bring you profitable business.

Just send your name and address today, and we will mail you the complete course at once for your approval.

TAMBLYN SYSTEM
1115 So. Pearl St., E-281
Denver, Colo.

(Continued from page 173)

PART TIME WORK WANTED

ENGINEER-CIVIL—Registered P.E. desires part time structural work. Possible association small architectural college. PTWW-8654, Engineering News-Record.

SELLING OPPORTUNITY WANTED

SALES MANAGER—Engineer. Many years experience, successful record Building industry. Will represent manufacturer or Engineering service East Coast with New York headquarters. Can take complete charge. RA 8630, Engineering News-Record.

WORK WANTED

PLUMBING SUPT. and two first class pipe fitters with years of actual experience on all types of heavy construction, such as refineries, power houses, filtration plants, housing projects, sewer and water services are now available for foreign service anywhere in South or Central America, WW-8570, Engineering News-Record.

SPECIAL SERVICE

Let us handle your wire rope
cable splicing problems, chokers, slings, pendants, guys, etc. SS-8425, Engineering News-Record.

PATENT ATTORNEY

Patent Practice
before U. S. Patent Office. Validity and infringement investigations and opinions. Booklet and form "Evidence of Conception" forwarded upon request. Lancaster, Allwine & Rommel, Registered Patent Attorneys, Suite 454, 815-15th Street, N.W., Washington 5, D.C.

A COURSE OF INSTRUCTION BY MAIL IN
STRUCTURAL ENGINEERING
Thirty-ninth Year

(In the following list, Courses A, B, and C are abbreviated from our complete Structural Engineering course).
A—Public Works Structures.
B—Architectural Engineering.
C—Special Course (State Board Exams. for P.E.)
D—Structural Engineering (complete).
E—Preparatory Course (for non-technical men).

Our courses have helped thousands of men to better positions.
Information sent without obligation. WRITE TODAY

WILSON ENGINEERING CORPORATION
College House Offices • Harvard Square • Cambridge, Mass., U. S. A.

Napoleon once said
"An Army Marches on Its Stomach"
We Have Fed Millions
KANE INDUSTRIAL SERVICE
Industrial Feeding.
Labor Camps.
Labor Camp Equipment.
Free Employment Agencies.
30 Years' Experience in the Housing and Feeding of Men for Satisfied Clients.
Abundant Labor Supply available for Large Projects Anywhere.
VALENTINE B. KANE & ASSOCIATES
1410 State St. New Haven 11, Conn.

A National Organization for
FEEDING and HOUSING
employees of Contractors . . .
Railroads . . . Industries . . .
OLYMPIC COMMISSARY CO.
CHICAGO 6, ILL.: 302 S. Canal St.
Phone HA 7-1670
SEATTLE: 316 Second Ave., South
MINNEAPOLIS: 105 Nicollett Ph: Atl 4845.

WANTED
Large engineering firm wishes to acquire several complete plants through purchase of (1) capital stock, (2) assets, (3) machinery and equipment, whole or in part. Personnel retained where possible, strictest confidence.
Box 1206
1474 Broadway New York 18, N. Y.

JOHN J. ABRAMSEN CO., INC.
200 W. 72 St., New York City *Endicott 2-7417-8*
RELOCATION and MOVING OF PLANTS, BRIDGES & BUILDINGS
CONSULT US—YOUR PROBLEM IS OURS

WANTED

WANT TO BUY *NEW SURPLUS*
VALVES & PIPE FITTINGS
EAST COAST VALVE & FITTING CO., INC.
725 FIFTH AVE. BROOKLYN 32, N. Y.

Compressors Wanted
STATIONARY - PORTABLE
LARGE OR SMALL
L. W. BAUER
22 Barnett Street Bloomfield, N. J.

WANTED
1—Used 60 Ton I Beam Trailer, with or without tractor unit.
A. S. WIKSTROM, Inc.
Skaneateles, N. Y.

WANTED
50 HP double drum electric hoist
Barber-Greene or Haiss Bucket Loaders
Locomotives: 20, 30, 45, 65, 80 ton
½ and ¾ yd. cranes and shovels
10 ton three wheel road roller
1½ yd. crawler crane
Barber-Greene Finisher
J. T. WALSH
Brisbane Bldg. Buffalo 3, New York

WANTED
Portable Boiler
100 to 125 h.p. for pile driving—horizontal type preferred.
JUTTON-KELLY COMPANY
13240 Alber Ave. Dearborn, Mich.

WANTED
CRANE
3900 MANITOWOC for steel erection, preferably with HBIS Cummins engine and torque converter.
W-8421, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

WANTED
FAIRBANKS-MORSE
Ten Cylinder 8⅛ x 10 O. P. Diesel Engine, Model 38D.
P. O. Box #2057 Ventnor, N. J.

SALE

Starting April 2nd **$200,000.00** **Starting April 2nd**

CONSTRUCTION EQUIPMENT

Late Model Caterpillar Tractors — Cranes — Shovels and Front End Loaders

AT REDUCED PRICES *Loaded on Cars or Trucks—Net Prices*

- (1) D8 2U Series Caterpillar Tractor DDPCU and Angledozer
- (3) D8 2U Series Caterpillar Tractors DDPCU and Scrapers
- (2) D2 Caterpillar Tractors Traxson Front End Loaders
- (1) R2 Tractor with Hydraulic Bulldozer
- (1) D7 7M Series Caterpillar Tractor with PCU and Dozer
- (1) D7 9G Series Caterpillar Tractor with PCU and Dozer
- (1) Cleveland Trencher, Model 95, with Trailer
- (3) Concrete Mixers, 1 yd. capacity
- (2) Rubber Tired Front End Loaders
- (1) P & H Truck Crane
- (1) Byers ⅜ yd. Dragline
- (1) Northwest ¾ yd. Model 25 Diesel Engine Dragline
- (3) Double Drum Power Control Units
- (1) Push Dozer
- (1) 1½ yard Clam Bucket—new
- (1) ½ yard Clam Bucket—new
- (1) ¾ yard Dragline Bucket
- Dozers for D-2, D-4 and D-6 Tractors—new
- (5) New Hydraulic Controlled Sand Spreaders

FIRST COME—FIRST SOLD

INSPECTION IN OUR YARD

The CHAS. M. INGERSOLL Co.

19930 Detroit Road • Call EDison 1010 • Rocky River 16, Ohio

CONTRACTORS EQUIPMENT

150,000 GENUINE BURLAP SAND BAGS

With Tie string at top.

Suitable for sand bagging, barricading, bulkheading, flood control, fire control and shipping, etc.

ACORN BAG AND BURLAP CO.
915 No. Delaware Ave. Philadelphia 23, Pa.
Phone: WAlnut 2-7070

FOR SALE *CHEAP*

1—Schramm Diesel 315 cu. ft. 2 stage compressor, pneumatic tires, new 1947.
1—LeRoi Diesel 315 cu. ft. 2 stage compressor, pneumatic tires, new 1946.
1—LeRoi Gas 315 cu. ft. 2 stage compressor, steel wheels.

HARRY C. LEWIS
899 East Grand Street Elizabeth, N. J.

---

150 CRANES

CRAWLERS-CRUISERS-TRUCKS

LORAINS - LINKBELT SPEEDERS - P & H - BYERS - NORTHWEST - BAY CITY - OSGOOD - MARIONS - BUCKEYES - INSLEYS - UNITS - HANSON - QUICKWAYS - OLIVERS

As Is

½ Yard, $2,500.00 to $3,500.00
¾ Yard, $3,500.00 Up—

ELLIS-NOVACK CO.
1925 N. Buena Vista, Burbank, Calif.
Phone Charleston 8-1641

FOR SALE

STEEL BUILDING

136 feet x 66—bolted—prefabricated—
OFF LOT TO HIGHEST BIDDER

NEWBURGH DOWNTOWN REALTY CORP.
Box 214 Newburgh, N. Y.

FOR SALE
Bucyrus-Erie
2½ cu. yd. Shovel
Model 54B.

Used for six months. Barley broke in. Available for immediate sale, good condition.

FS-8423, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

WANTED:
½ yd. Backhoe for 515 Unit Shovel
¾ yd. Backhoe for Hanson Model 65
Low Bed Trailer 20 to 40 Ton

FOR SALE:
1 Fruehauf Pole Trailer (Telescope 20 to 40 ft) Air Brakes
2 30 ft Trailer chassis, air, 12:00 Tire, 25 Ton, Unused
1 Cletrac Tractor, gas, Wis. Motor, 12 Volt Starter

W-8313, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

UNUSED
SURPLUS BUCKETS

Draglines

½ yd.	Bucyrus Erie	$250.00 ea.
½ yd.	Page	350.00 ea.
¾ yd.	Link Belt	350.00 ea.
1½ yd.	Page	650.00 ea.
2 yd.	Erie	550.00 ea.

Clamshells

½ yd.	Erie	350.00 ea.
¾ yd.	Erie	425.00 ea.
¾ yd.	Blaw Knox	525.00 ea.
¾ yd.	Kiesler	525.00 ea.
1½ yd.	Blaw Knox	800.00 ea.
2 yd.	Johnson	850.00 ea.
2 yd.	Blaw Knox	1250.00 ea.

FS-8634, Engineering News-Record
330 West 42nd St., New York 18, N. Y.

3—MADSEN DRYERS

About 3 years old

6' x 28'—skid mounted with stack, burners, firebox, preheater & V-belt drive.

L. B. SMITH, INC.
Camp Hill, Pa.

United States Department of the Interior, Bureau of Reclamation. Sealed bids will be received by W. C. Austin Project, Altus, Oklahoma until 10:00 A.M., May 3, 1949, then publicly opened for sale of surplus construction machinery and spare parts, consisting of 13 cy. Euclids, Steel Derrick, Bin Gates, Hoists, Electric Motors, Grouting Machine, Conveyors, Power Hammer, Paving Breakers, Screening Plant, Miscellaneous Plumbing Fittings, Welding Supplies, Tool Steel, Structural Steel, Caterpillar D-6 Spare Parts (New), Delco-Remy Generator Parts, Chevrolet Motor Parts, Bearings for Le Tourneau Carryall, and many other items. Project Engineer, Bureau of Reclamation, Altus, Oklahoma will supply bid form and detail list upon request.

SEARCHLIGHT SECTION

SHOVELS, CRANES, DRAGLINES

Buc-Erie 54B 2½ yd. Diesel Shovel.
Buc-Erie 120B. 5 yd. Elec. Shovel.
P & H 1055 Hi-Lift Diesel Shovel
Northwest-6 Diesel 1¾ yd. Shovel
Marion 111-M Hi-Lift 5-yd. Shovel-Diesel
Link-Belt Speeder LS-80, ¾ yd. Shovel-Diesel
P&H 1225 2¼ yd. Electric Shovel.
Lorain 820 Diesel crane, 40 tons, 1943.
Lima 1201 Diesel Drag, 3½ yds.
P & H 1055 Dragline Diesel 80' boom.
P & H 705 diesel dragline.
P&H 855B 2 yd. Diesel Shovel.
Manitowoc 2000B 1½ yd. diesel dragline.
Lorain dragline 78 diesel 75' boom.
Lorain MC4 moto crane. 1943. Excellent.
Lorain MC-414 Moto-Crane. 1948. New Condition
Lorain MC-4 Moto-Crane. New 1943
Lorain MC-4 Moto-Crane. Rebuilt Condition

ROAD CONTRACTORS EQUIP.

Finisher Koehring Long. 20'—24'.
Finisher Blaw-Knox 10'—12'
Port. 500 CFM Diesel Air Compressor.
Rooter 5½ ton LaPlant-Choate
Blaw-Knox Concrete Spreader, 20'x24'.
Cat. 12 road grader 9K series.
Rooter LaPlante Choate 3 time RP.
Road Forms 8000 ft. 9"x9"

ASPHALT PLANTS

8-G Bit. Concrete Model 848 Mixing.
Cedar Rapids "Speedline".
Cedar Rapids Portable 20 Ton per hr.
Cedar Rapids 4000# Model E Portable.

SPECIAL OFFERINGS

SHOVELS

Bucyrus-Erie Model 54B 2½ yd. Diesel Shovel.
Koehring Model 304 ¾ yd. Shovel, Diesel powered. New 1946.

DRAGLINE SPECIAL

Bucyrus-Erie Monaghan Model 6W, 8 yd. Diesel Dragline 150' Boom

TRACTORS:

FACTORY NEW D-8 2U Series with D.D.P.C.U. and Bulldozer.
Caterpillar D7 Traxcavator 2T Series with 1 yd. Bucket.
Caterpillar D7 with Hydraulic Angledozer, 3T Series. Excellent Condition
Caterpillar D7, Cable controlled, 3T Series with Angledozer
Caterpillar D-2 Traxcavators with ¾ yd. Bucket with Bulldozer blade. Worked 700 hours.
Caterpillar D8, 2U series, about one year old, with D.D.P.C.U. and angledozer
Caterpillar D8, 5R series, D.D.P.C.U. and angledozer blade.
International TD18, with LeTourneau double drum unit. New in late 1946.
Allis-Chalmers HD-19H with angledozer blade. New July 1948.
Int. TD18 with Heil angledozer Trail Builder with D.D.P.C.U. New Nov. 1947.

GRADERS:

Warco Motor Grader, new September 1947.
Caterpillar, Model 112 Motor Patrol. Condition Excellent.
Austin-Weston 99H New Nov. 1948. Int.-UD14 Diesel Engine.

EUCLID REAR DUMP TRUCKS:

Model 31FD New January 1946. **Model 27FD New April 1946.**
Model 27FD New April 1946. **Model 27FD New November 1946.**
NOTE: Must be sold as ONE UNIT

TOURNAPULLS:

4 LeTourneau Super C Tournapulls with LaPlant-Choate scrapers.
3 LeTourneau 10 yd. Rock Wagons.

WAGON DRILLS:

Buckeye M-12 with Buda 6 cyl. gas engine. Cap. 18" to 7'
Barber-Greene Model 44-C
Buckeye Model 120
Cleveland Mouel 95

READY MIX CONCRETE PLANTS

Blaw Knox 309 bbl. Cement Bin and Johnson 3 compartment 192 ton Johnson Aggregate Bin. Complete Plant.
Butler complete ready-mix concrete plant 192 ton Agg. Bin 350 bbl. bulk cement bin.
Johnson complete ready-mix concrete plant 192 ton Agg. Bin 350 bbl. bulk cement bin.
Johnson 500 yd. Batcher plant; 3 compts. aggregate one for 500 bbl. cement. Excellent condition.
Butler Plant 300 T.aggr. 400 bbls. cement
Butler 300 ton 3 comp. bin has 1 compt. for 400 bbls. cement, complete with weighbatcher, bucket elevator, etc.
Heltzl 3 compt. 100 ton Agg. Bin.

TRANSIT MIXERS, PAVERS, ETC.

Adnun Black Top Paver 10'-12'.
Pumpcretes, 160-150-190-200.
Ransome stationary Concrete Mixer 848.
Multifoot 27-E, paver, rebuilt.
Rex 34E dual Drum Paver.
Koehring 28-S Mixer. Gas Operated.
Rex 34E dual drum Paver. Like new.
Rex 27E Paver. Good condition.

DERRICKS—STEEL & STIFF-LEG

Derrick & Hoist 75 tons stiff-leg.
American Terry stiff-leg 50 tons 90' bm.
American Terry, stiff-leg 10 tons, 75' bm.
Kelley 25 ton Guy, 100 ft. mast 90' bm.
Insley Guy 20 tons, 115' mast, 90' bm.
Wiley 50 ton Steel Stiff-leg, 60' boom.
Steel Guy 25 tons 110' mast, 100' bm.
Steel Guy, 25 tons, 125' mast, 115' bm.
Steel Stiff-leg 25 ton, 3 drum Elec. hoist.

30 CHURCH STREET Cable "RICHWALSH" New York **RICHARD P. WALSH CO.** Telephones: Cortlandt 7-0723 7-0724 **NEW YORK, N. Y.**

AIR COMPRESSORS

110-315, 420, 605, 1,000 Ft. I-R Diesels
2—676', 870', & 1350 Ingersoll Rand XCB Bltd 1392, 1578, 2200, 3176 & 5000' Elec.
Low Pres: 743, 1200, 1500, 2000 & 5000 ft.

CRANES—DRAGLINES

1 Yd. P. & H. 600 50' Boom Crane
8—45 Ton & 25 Ton Cap. 100 Ft. Boom Whirleys with or without Gantrys, Steam Elec. Diesel
16 Yds. 160 Ft. Boom Elec. Dragline
1½ Yd. 42B Bucyrus Steam 50 ft. Boom Crane & Shovel
1½ Yd. P. & H. Model 706B Dragline & Shovel
1—7 Yd. Cap. Marion Diesel Dragline
1—6 Yd. Cap. B.E. Monighan Diesel Dragline

DUMP CARS

136 TUNNEL CARS ½ Yd., 2 Yd. & 4 Yd. Cap.
40—12 Yd., 20 Yd. & 30 Yd. St. Ga. Air Dump

HOISTING ENGINES

STEAM: 14x12, 9x10, 8½x10, & 7x10
ELECTRIC: 20, 40, 60, 80, 100, 125 & 150 H.P.

LOCOMOTIVE CRANES

25 Ton American Steam & 3—20 Ton Ohio
35 Ton Industrial Brownhoist, Diesel
50 Ton Industrial Brownhoist, Steam

LOCOMOTIVES

35—Steam—40, 60, 110 & 220 ton
14—Diesel—15, 25, 45, 65, & 80 ton
44—Gasoline—5, 6, 8, 12, 16, 25 & 35 ton

PILE HAMMERS & EXTRACTORS

9—McKiernan-Terry No. 1, 5, 5, 6, 7, 9B3, 10B3
Vulcan 800 Extractor & Vulcan #2 & 1 Hammers
5 VULCAN 50c & 80c Hammers

PUMPCRETE

Model 160, 190 & 180 & 200 REX Pumpcretes

R R CARS

140—Flat Cars 30-40, 50 ton
20—Gondolas 40 & 50 ton
60—40 Ton Cap. Box Cars
126—8000 & 10000 gal Tank Cars

SHOVELS

1¼ Yd. 41B Bucyrus Steam
1—47 Yd. Cap. Bucyrus Erie Elec. Shovel
2—10 Yd. Cap Marion Elec. Shovels
1—8 Yd. Cap. Marion Elec. Shovel
1—5 Yd. Cap. Marion Elec. Shovel
1—4 Yd. Cap. Marion Diesel Shovel
5 STEAM SHOVELS—3½, 5, 6 & 8 YD.
2—4 Yd. Marion Elec.

STEL DERRICKS

5 Ton Steel Stiff Leg 40 Ft. Boom
2—Clyde 15 Ton Stiff Leg 100 & 125' Boom
2—Terry 25 Ton 100' Boom Guy Steel Erectors
3—7-10 Ton Guy 85' & 50 Ton 100'

STEEL STORAGE TANKS

14—5,000, 35,000 & 80,000 bbl. cap.
17—8000-15000 & 25000 & 42000 gal. cap.

TUNNEL EQUIPMENT

CONWAY Muckers 20A, 30A, 50A, 60A & 75
3—G.D. & Elmco Tunnel Muckers
7—Battery Locomotives, 5 & 8 Ton

R. C. STANHOPE, INC.
60 E. 42 St. NEW YORK, N. Y.
Telephone: MUrrayhill 2-3076

GMC • STUDEBAKER • REO
OWNERS

- **New double strength trunnion shafts with brackets and bushings.**
- **New rear axle drive shafts.**
- **New and slightly used six cylinder engines.**
- **Also many other parts for same.**

CONSTRUCTION EQUIPMENT & TRUCKS
L. B. SMITH, INC.
Harrisburg 7331 **Camp Hill, Pa.**

FOR SALE

FACTORY NEW BARNES CENTRIFUGAL PUMPS
Sizes 1½" to 6"
and
BARNES SINGLE DIAPHRAGM PUMPS
Immediate Delivery
20% OFF LIST
also
New and Slightly Used Buggymobiles

HODGE & HAMMOND, INC.
1162 Grinnell Place
New York, 59, N. Y.
Dayton 9-5300

Pile Driving Equipment

Vulcan and McKiernan-Terry Steam Pile Hammers and Extractors
Pile Driving Accessories
Drop Pile Hammers and Caps
Steel Sheet Piling

CONTRACTORS MACHINERY COMPANY
2637 Southwest Blvd. Kansas City 8, Mo.
Phone Valentine 4740

FOR SALE

1¾ Lima 701 crane-shovel-dragline. Superior diesel. Overhauled. 60 ft. bm. Bargain.

2½ yd. Northwest 80D diesel shovel. Murphy engine. New 1941. Low price.

50 ton Whitcomb diesel elec. switching locomotive. Cummins engines. New 1942. Excellent.

35 ton Ohio locomotive crane. New 1943. Gasoline power. Used 30 days.

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St. St. Louis 1, Mo.

SELF PRIMING CENTRIFUGAL PUMPS

Gasoline Engine Driven
Jaeger and Rex
6" 8" 10"
Thoroughly reconditioned
EDWARD EHRBAR, INC.
29 Meserole Ave. Brooklyn 22, New York
Evergreen 9-3570

STEEL BAR JOIST

In Stock for Immediate Shipment

550 Pcs.	8"	# 82—16'-8"
200 Pcs.	8"	# 82—24'-0"
350 Pcs.	10"	#102—18'-8"
200 Pcs.	10"	#103—20'-8"
150 Pcs.	16"	#167—24'-0"

Also all sizes structural steel in stock.

ACORN IRON & SUPPLY
915 No. Delaware Ave. Philadelphia 23, Pa.
Phone: WAlnut 2-7070

DEPENDABLE USED MACHINES

Special.—Osgood Model 200 backhoe, ½ yd., excellent condition

Link Belt car puller	Link Belt 2½ yd. dragline	Vulcan 3000# drop hammer
24x40 port. conveyor	Bay City 45 dragline	Int. UD14 power unit
Browning 20 ton crane	Bay City 25 dragline	American 10" sump pump
Universal ½ yd. crane	Osgood Invader dragline	Bay City ½ yd. shovel
Silent Hoist Krane	Pioneer 42"x14' feeder	Browning truck crane

For rent.—15 current model Bay City cranes, shovels and backhoes.

3505 W. 51st St. TRACTOR & EQUIPMENT CO. Chicago, 32

L.B.SMITH INC.

OFFERS

AIR COMPRESSORS

Worthington two-stage, water cooled, vertical 250#, 60 CFM, new condition.
Gardner-Denver, 105 foot, with air receiver, hose reel, driven by power take-off and mounted 1941 Ford.
Gardner-Denver air-cooled 105 foot with receiver, V-Belt driven from power take-off and mounted on 1942 Ford chassis with Wood two-yard dump body.
Gardner-Denver two-stage 160 ft., skid mounted.
Worthington 210 cubic foot, two-stage air-cooled, on steel wheels with Hercules diesel.
Chicago Pneumatic 210 cubic foot, two-stage, air-cooled, Caterpillar diesel on four rubber tired wheels.
Gardner-Denver 315 cu. ft. two-stage, skid mounted, Murphy four-cylinder diesel.
Pennsylvania 12" x 10" class 3A single cylinder, 355 cubic foot P.D., flat belt driven, 50 HP slip ring motor.

QUARRY EQUIPMENT & BINS

New 16 x 16 double clamshell gates.
20" x 6'6" Belt Type Magnetic Separator.
Practically new Jeffrey type VS, 28'6" centers, bucket elevator, 6 x 4 buckets, belt mounted, fully enclosed, can extend to 80'.
Link-Belt style 146 vertical centrifugal discharge bucket elevator, belt type, fully enclosed, extendable to 65'.
18 x 36 Farrell deep jaw crusher, with McLanahan 3' x 7' roll type feeder.
10 x 20 Champion No. 4½ primary jaw crusher.
10 x 7 Allis Chalmers Blake type jaw crusher.
Williams 20-S pulverizer.
Cedarapids No. 1 Kubit.
36 x 36 Jeffrey Flextooth pulverizer.
100 ton 3 compartment storage or aggregate bin with or without batcher and scales.
60 ton 2 compartment storage bin with clam shell gates.

ELECTRIC MOTORS

New & Rebuilt—All Sizes
3 to 125 HP in stock
Open and Totally Enclosed

TRUCKS—TRAILERS

1½-ton Ford & Chevrolet.
2½-ton GMC, New and rebuilt.
Van Trailers with 17' x 7'8" x 6' bodies. Five ton capacity.
2,000 gallon tanks on semi-trailer mounting. New and rebuilt dump bodies.

DIESEL GENERATORS

7½ KW to 125 KW. Alternating and direct current.

SHOVEL

Osgood 1¾-yd diesel powered shovel with 23' boom, 17' dipper stick, 1¾-yd dipper D13000 diesel engine. Excellent condition.

GASOLINE AND DIESEL ENGINES

New JXD Hercules Gasoline.
Buda, Hercules, Hill diesels, rebuilt.
New Murphy 4 and 6 cylinder diesels.
GM 6 and 12 cylinder diesels, practically new.
New Cummins 6 cylinder diesels for Euclids.

SHOVEL ATTACHMENT

Lorain 30A chain crowd, LBS#5142, 16' boom 13'4" stick ½-yd dipper.
Lorain 40 Hi-Lift, 25' boom 19'8" stick LBS #5877, new ¾-yd dipper LBS#7750.
P&H 203A, LBS#2527, 19'6" boom 13' stick ⅝-yd dipper.
Bucyrus-Erie 30B tunnel front 9' stick 1½-yd dipper LBS#3392.
Koehring 502 with necessary parts to convert from crane to shovel, 21' boom 16' stick 1¼-yd dipper.

BACKHOE ATTACHMENT

Lorain 41 backhoe, LBS#5429, with 18' boom, 7' stick, 35" cutting width Amsco bucket. Will fit any ¾-yd Lorain with serial number over 9,000.

DRAGLINE FAIRLEADS

New Osgood ½-yd Model 200.

BACKHOE BUCKETS

¾-yd Lorain, 40, LBS#6105, 44" cutting width, teeth, sheave.
27" outside width drop bottom type LBS #1033, good condition.
26" outside width solid bottom type LBS #4377, good condition.

NEW TAGLINES

McCaffrey Model 648 for 1¼ to 2-yd crane.
McCaffrey Model 636 for ¾-yd to 1-yd crane.

SHOVEL DIPPERS

Lorain 27, ⅝-yd LBS#4912.
Bucyrus-Erie 20B, ¾-yd LBS#3801.
Lorain 41, ¾-yd, LBS #7433, new condition.
New Lima 1-yd, Amsco, LBS#2295.
Bucyrus-Erie 1¼-yd gas air, LBS#3782, fair.
Lorain 75 manganese 1¼-yd, LBS#7233, teeth and bail.
Lorain 75B, 1¼-yd extended lip, 1¾-yd LBS#2260.
Pettibone-Mulliken 2-yd Lorain 82 or 820, manganese, LBS#5361.
Pettibone-Mulliken 2-yd for 3500 Manitowac LBS#6153.
Pettibone-Mulliken 2-yd for 3500 Manitowac LBS#5763.

CONCRETE ROAD BUILDING & MISCELLANEOUS CONCRETE HANDLING EQUIPMENT

Pavers & Mixers

Ransome 34E dual drum, new October, 1943, with 36'9" boom, 1000 gallon auxiliary water tank, Cummins engine, rebuilt.
Jaeger Model 14DL, non-tilt mixer, rebuilt.

Concrete Finishers

Jaeger type "L" double screed, 10½'-12½', rebuilt.
Heltzel 10'-12' finisher, rebuilt.
Blaw-Knox gas-electric 10½'-12½', rebuilt.
2 Koehring 10'-12', rebuilt.
Koehring 10'-16' finisher, rebuilt.

Concrete Spreaders

Blaw-Knox type SA 10'-15' spreader, new 1943. New condition.

Concrete Road Forms

830'—Truscon 7"x8" forms, with stakes.
1380'—Heltzel 7"x8" forms, with stakes.
1300'—Blaw-Knox 8"x8" forms, with stakes.
445'—Heltzel 9"x8" forms, with stakes.
1430'—Heltzel 10"x8" forms, with stakes.
1010'—Blaw-Knox 10"x8" forms, with stakes.

Fine Grade Machines

Flynn surgrader 10'-12', rebuilt.
R.B. Fine Grader for 21' width, rebuilt.

Form Graders—2 of each

Cleveland formgrader, new condition.
Carr formgrader, new 1944, rebuilt.

BELT CONVEYORS

New 18"—24"—30"—36"
- "Sealed-for-life" idlers
- Lattice or channel frame
- Shipment from stock depending on length

CLAM—DRAG—SCRAPER BUCKETS

GRADERS

Caterpillar 44 hydraulically operated drawn grader, 12' blade, wt. 8,300 lbs.
York Corporation Model SR drawn grader with scarifier, 8' blade, rakes, pneumatics, wt. 7,900 lbs.

DIESEL POWERED TRACTORS

"FD" Cletrac with Buckeye blade and double drum P.C.U.

***Phone* HARRISBURG, PA. 5-7331**

LASTING • BONAFIDE • SERVICE — L.B. SMITH, INC.

L.B.SMITH INC. CAMP HILL, PA. SUBURB OF HARRISBURG

WE OWN THE EQUIPMENT WE ADVERTISE

NEW and LIKE-NEW EQUIPMENT

SPECIALLY PRICED — READY FOR INSPECTION — IMMEDIATE SHIPMENT

NEW HOISTS

3—30HP CHRISTIAN, 2 Drum Gas Hoist with Swinger
3—35HP JAEGER, 2 Drum Gas Derrick Hoist with Swinger
15—60HP LIDGERWOOD Single Drum Gasoline Contractors Hoist with Waukesha Engine Capacity 6000 lbs. @ 235 f.p.m.
1—80HP AMERICAN, 2 Drum Diesel Derrick Hoist with Swinger
1—125HP CHRISTIAN, 2 Drum Derrick Hoist with Swinger
2—138HP CLYDE, 3 Drum Derrick Hoist with Swinger
2—8¼ x 10 CLYDE, 3 Drum Steam Derrick Hoist with Swinger, with or without 150± ASME Boiler

COMPRESSORS—PNEUMATIC TOOLS

NEW AND REBUILT SCHRAMM AIR COMPRESSORS. Portable and Stationary. All sizes from 20 cu ft to 420 cu ft actual.
NEW AND REBUILT Paving Breakers, Rock Drills, Clay Diggers, Tampers, Chipping Hammers

REPAIR SERVICE

Consult us for estimates and advice on overhauling Your Equipment — in our shop or at your plant by experienced mechanics under competent supervision.

RENTALS

By the day—week—or month of Compressors, pneumatic tools, hoists, steel hoisting towers, pumps, mixers, etc.

REBUILT HOISTS

3—LAMBERT 8½" x 10" Double Drum Steam Hoists—LIKE NEW—with or without boilers
1—LAMBERT 13" x 16" Coal Hoist with Side by Side Drums
1—LAMBERT 9" x 10" Double Drum Steam Hoist—Boiler Type
1—LAMBERT 10½" x 12" Three Drum Steam Bucket Hoist with Removable Drum Lagging & Heavy Duty Extended Shaft Arrangement with Four Winchheads
1—AMERICAN 3 Drum Contractors Hoist with 135HP Hercules Gasoline Engine

PILE HAMMER

McKIERNAN TERRY Model S-3, Bought 1948, Used On One Job

DERRICK

AMERICAN All Steel Stiffleg with 90' Boom, 3 Line, Capacity 20 tons at 58'; 13 tons at 88'.

INTERNATIONAL HOIST & MACHINE COMPANY

Phone Mitchell 2-4273

OFFICE—556 FERRY ST. NEWARK 5, N. J. PLANT 61-67 ESTHER ST.

---

20 ton Whitcomb gas locomotive
30 ton Plymouth gas locomotive
160# vt. boiler 54" x 8' 5, Nat. Bd.
Barber-Greene Ditcher
Barber-Greene 82A Bucket Loader
Haiss 77 Bucket Loader
50 HP Clyde electric hoist
½ yd. shovel attach. Bucy-Erie 15B
Pullshovel for N. West 104
25 ton Browning loco. crane, 50' boom
25 ton Industrial loco. crane—gas
71W Byers Traveler shovel-crane
30 ton American locomotive, steam
⅜ yd. Byers Bearcat Jr. crane
Barber-Greene 879 Finisher
Jeffrey roll crusher, 30 x 36"

J. T. WALSH
Brisbane Bldg. Buffalo 3, N. Y.

Caterpillar Tractor, Model 30 PS Series w/ side boom.
Caterpillar Tractor Mod. 20, PL Series w/ end winch.
Auto Car 1943 Model U7144 w/ Enclosed Cab
Boiler Tubes • Pipe
Gas Engines • Machinery

BRADFORD SUPPLY COMPANY
Wayne, Wood County, Ohio Near Toledo

BOILERS

10 to 1000 H. P.
NEW-USED
RECONDITIONED
Steam, Gas and Electric Power Equipment
J. PARKER THOMPSON CO., INC.
507 FIFTH AVE., NEW YORK CITY
MURRAY HILL 7-6547-8-9

FOR SALE

1—Austin Western, Model 99M Auto Patrol Grader, equipped with International Diesel engine, 4—14x20 tires and scarifier.
1—Link Belt Model L.S. 50 with shovel front. This machine is practically new.
3—Rex 4½ cubic yds. transit mixers, like new, less than year old. These are mounted on diamond T 6x6 trucks.
1—Bucyrus Erie model 41B steam crane with boom, boiler recently overhauled and machine is in excellent condition.
1—87 Caterpillar Tractor, 7M series, equipped with LaPlante Choate bulldozer.

VILBRO EQUIPMENT CO.
233 North Ave. Westfield, N. J.

SPECIAL OFFERING

Jacks For Sale

At Prices below original cost

9—Duff-Norton 50 ton 14" rise model No. 5260-BB, high speed self lowering, ball bearing, screw jacks, with large head. Height 26".
4—Duff-Norton 25 ton 10" rise, Model No. B-2522, heavy duty, screw jacks. Height 22".
1—Duff-Norton 35 ton, 14" rise, Model No. 3265-BB, high speed, self lowering, ball bearing, screw jack with large head. Height 26".
3—Buda, 25 ton, 5½" rise, Model No. 2510. Ball bearing, ratchet journal type. Height closed 10".
2—Joyce, single acting auto. lowering jacks, No. 2028, 20 ton cap., 28" high 19" rise.
2—Joyce, single acting auto. lowering jacks, No. 76-A, 10 ton cap., 22" high, 13" rise.
2—Joyce, single acting auto. lowering jacks, No. 1922-A, 15 ton cap., 22" high, 13" rise.
2—Joyce "Jackmaster" screw jacks, 13¾" x 10", 16 ton cap., 13" overall height.
1—Joyce "Jackmaster" screw jack, 2" x 12", 20 ton cap., 15½" overall height.

ACORN IRON & SUPPLY CO.
915 No. Delaware Ave. Philadelphia 23, Pa.
Phone: WAlnut 2-7070

FOR SALE

1948 TZ-20 Moto Lorain Cranes—good condition 30' booms 5' extensions, generating power plants, magnet reels.
Huber 4-5 ton tandem roller.
Rex 4"-6" Centrifugal water pumps, gasoline engine, suction discharge hose.
Jaeger 2" centrifugal pumps, gasoline power.
Jaeger 1½" centrifugal pumps, gasoline power.
Blaw-Knox finishing machine adj. 10-14 ft.
Heltzel finishing machine adj. 10-14 ft.
1939 Ford V-8 truck with Davey 105 ft. compressor mounted. A-1 Condition.
Sullivan 105 ft. Compressor, pneumatic tired 2 wheel mounting.
Ingersoll-Rand 85 ft., 105 ft., 315 ft. Compressors, pneumatic tired mounted.
Road forms 7"-8"-9".
Osgood Invader ½ yd. Combination 30' Crane, shovel, backhoe.
Michigan TLDT-20 mobile crane, 12 ton, 30' boom 5'-10' extensions, generator, Rudo-Matic tagline winder.
Gardner-Denver 210 cu. ft., 2 stage gasoline powered compressor, 4 wheel pneumatic tire mounting.
Cutler Hammer 29" magnet (like new).

Subject to prior Sale.

WEPCO EQUIPMENT CO.
3366 Independence Road.
CLEVELAND, OHIO

HOSE SALE

BRAND NEW "GOODRICH"

4-INCH FIRE HOSE

Complete with male and female couplings, 200-lbs. pressure, rubber-lined, in 50-ft. lengths.

USES: Portable Pipe Lines: FIRE HOSE: Sewer & Trench work: Manholes: Discharge on Pumps: Mines.

50-ft. length, complete with fittings $30.00

SALE PRICE 60¢ Per Foot

• IMMEDIATE DELIVERY—ORDER NOW!

BERNSTEIN BROTHERS
Phone 8404 "Since 1890" PUEBLO, COLO.

FOR SALE OR RENT

LORAIN mod. 79 SHOVEL & CRANE

1¼ cy capacity, with D12000 Caterpillar Diesel engine, completely rebuilt throughout and in A1 condition, free shop New York ready to go.

BENDIX MACHINERY CO., INC.
401 Broadway New York 13
Tel: Canal 6-5693

BOILERS: 40,000 lbs. steam per hour, water tube, self-contained.
1—100 H.P., 90 lbs. pressure, complete with oil burner and control equipment. Portable.

COMPRESSOR: Schramm, 420 electric, capacity 450 CFM, 75 H.P. motor, V-belt drive.

DRAGLINE: 4 yd. capacity, 110' boom, 2200 volt, A.C.

DRAGLINE BUCKET: Page 4 yd., medium duty, complete.

TRACTOR: Caterpillar D4, wide gauge, with blade.

DRILL: Bucyrus Erie 29-T gas, 9" bits. NEW.

PUMP: Worthington 40 H.P., 3 phase, 60 cycle, 220-440 volt, 1765 RPM with V-belt pulleys and belts, starter, etc.

M. G. SET: G.E. 3 phase, 60 cycle, 220 volt, 20 H.P., D.C. generator, 12 KW, 125 volts, with push button compensator.

MOTOR: G.E. 40 H.P., 3 phase, 60 cycle, 220-440 volt, 1765 RPM, with V-belt pulleys and belts, starter, etc.

DIESEL MOTORS: 2—900 H.P., 12 cyl., 744 RPM, complete.

GOODRICH SUPER LONG LIFE CORD CONVEYOR BELT (NEW): Large quantity of Goodrich Belt 42" wide, 6 ply, 42 oz. duck, 7/32" top cover, 1/16" bottom cover, on original reels, all NEW. NATURAL RUBBER, with or without mechanical parts.

CRUSHING PLANT: Portable, diesel powered.

GYRATORY CRUSHERS: 1—30" and 42", complete with motor and drive.
1—Allis-Chalmers 9-K and 6-K. 1—Austin No. 8, 20" opening with feeder.
1—Telsmith 16-B, all steel, 15" opening.

JAW CRUSHERS: All sizes 4 x 6 to 48 x 60".

REDUCTION CRUSHERS: Traylor type TZ, size 36"; Kennedy model 37 with motor integral; Telsmith 32-B complete with V-belt pulley; Allis Chalmers type R322 fine reduction; Traylor type TY, 1'8".

ROLL CRUSHERS: Jeffrey 18 x 24 double roll crusher for coal, coke, cinders, etc. Allis Chalmers 54 x 20". NEW condition.

HARDINGE MILL: Conical Ball Mill 6' x 22", manganese steel lined, Herringbone gears, with motors and V-belt drive.

KILNS, COOLERS, DRYERS: 1—Single shell 34" x 20 ft., complete with drive, burner; no motor. 1—5' x 50' brick lined Kiln.

DERRICK HOIST: National 3 drum, 80 H.P., shop No. 4636, with 15 H.P. separate electric swinger, 3 phase, 60 cycle, 220/440 volt.

SCRAPER HOIST: Ingersoll Rand 50 H.P., 3 drum, 220/440 volt.

MINE HOISTS: Single and double drum, 150 H.P., 250 H.P., 400 H.P., 600 H.P., 800 H.P., 900 H.P. and 1000 H.P. All complete with motors and control equipment.

A. J. O'NEILL
Lansdowne Theatre Building
LANSDOWNE, PA.
Phila. Phones: Madison 8300 - 8301

CRAWLER CRANES, DRAGLINES AND SHOVELS

1—2¼ yd. Link Belt Model K570 Diesel Crane, Ser. No. 2215, with high gantry, hydraulic controlled. Powered by Caterpillar D-17000 Diesel engine. Equipped with 80' boom. For either crane or dragline work. Will handle 2½ yd. dragline bucket.
1—1¾ yd. Link Belt Model K370, Ser. No. 2247, equipped with 70' boom, powered by Cat. D13000 Diesel engine.
1—1½ yd. P&H Model 655-A, combination shovel, dragline and crane, Ser. No. 6426, powered by Caterpillar Model D13000 Diesel engine. Crane boom 75', shovel front 24' boom, 18' sticks, 1½ yd. manganese dipper.
1—1½ yd. Link Belt Model K300, Ser. No. 1959, powered by Caterpillar D17000 Diesel engine with 65' boom. Also have back hoe attachment, boom 23', scoop arm 8'9", pull shovel mast 11'9", with 1¼ yd. dipper.
2—1¼ yd. #5 Northwests, Ser. Nos. 4564 and 3427. Powered with 6 cyl. Wise. Model DS4 and Twin City Model TA gasoline engines. With 50' and 60' booms.
1—1¼ yd. Link Belt Model K38 crawler crane, Ser. No. 1520. Powered with 4 cyl. Model WL 51B Waukesha gasoline engine with 50' boom.
1—1 yd. Byers Master Model, Ser. No. 3596, powered by 4 cyl. Hercules Model TXO gasoline engine, with 40' boom.
1—1 yd. Erie Gas-Air Model GA-2 combination shovel and crane, Ser. No. 10679, powered with 4 cyl. Waukesha Model WL55 gasoline engine, with 45' crane boom. Shovel boom 22', sticks 17' with 1 yd. dipper.
3—¾ yd. Koehring Model 301, Serial Nos. 544, 772 and 840. Powered by 4 cyl. Wisconsin Model M gasoline engines. With 40' boom.
1—¾ General Model 307, Ser. No. 2575, powered by 71 HP 8 cyl. Chrysler Industrial engine, with 40' boom.
2—¾ yd. Buckeyes, Model 70, Ser. Nos. 5409 and 5411, with 40' boom, powered by 71 HP Chrysler Industrial gasoline engines.

WE OWN 15 CRANES NOT SHOWN ON THIS LIST. SEVERAL CRANES LISTED ARE IN OUR RENTAL DEPT. ONLY.

We are PROFESSIONAL REBUILDERS. A fit that would pass in a repair shop isn't close enough here. That's why our REBUILT equipment is DEPENDABLE.

LOCOMOTIVE CRANE

50 ton Industrial Brownhoist steam locomotive crane Type L, with 60' boom, Code boiler, new August, 1948, used less than 6 months, condition like new. CAN BE PURCHASED AT SUBSTANTIAL SAVING, IMMEDIATE DELIVERY.

STIFFLEG DERRICKS

11—Stiffleg derricks, 1—62½ ton Insley 54' mast, 70' boom, 30 ton BRAND NEW Wiley derricks; 50' mast, 60' booms, 1—15 ton All Steel derrick 25' mast, 90' boom. 2—4 ton Ingrams, 23'-8" mast, 50' boom.

GUY DERRICKS AND HOISTS

2—20 ton NEW American Hoist & Derrick Co. Mdl. 2-160, steel erectors guy derricks, 122' masts, 100' booms, 16' bullwheels. Complete.
1—NEW American Hoist & Derrick Co. Mdl. 100-3G 3/drum gasoline hoist, powered by Mdl. 140-GKU Waukesha gas engine.
1—American Hoist & Derrick Co. Mdl. 140-3 steam hoist, 9" bore, 10" stroke, without boiler, equipped with air compressor for operating air frictions.

AIR COMPRESSORS

Portable and stationary, belt with electric or gas power, sizes from 20 cu. ft., 1,000 cu. ft.

PARTIAL LIST ONLY — SEND FOR NEW STOCK LIST — JUST PUBLISHED
All this equipment is owned by us and may be inspected at one of our plants.
WE BUY—REBUILD, SELL AND RENT.

Schaff Bldg., 1503 Race St.
PHILADELPHIA, 2, PA.
Phone Rittenhouse 6-4664

1155 So. Washtenaw Ave.
CHICAGO 12, ILL.
Phone NE vada 8-2400

30-J Church St.
NEW YORK 7, N. Y.
Phone Worth 2-0036

P.O. Box 933-J
PITTSBURGH 30, PA.
Phone Federal 2000

EQUIPMENT CORPORATION of AMERICA

TRUCK CRANE

Slightly Used in excellent condition—"Quick-Way" Model "J" mounted on International KB6 Chassis. 20' Boom plus 10' Insert and Trench Hoe Boom with 18" bucket. Chassis driven only 150 miles. Price $6,500.00

WRITE PHONE WIRE

EDWARD EHRBAR, Inc.
29 Meserole Avenue Brooklyn, N. Y.
Evergreen 9-5570

For STEEL Sale

60 Tons 6" H 20# 40'
85 Tons 8" H 31# 40'
73 Tons 10" H 49# 40'
112 Tons 12" H 65# 40 & 45'

Large stock of Angles, Channels, and Standard I-Beams.

QUEENSBORO STEEL CORPORATION
Long Island City, New York
Stillwell 4-2720, 6-5448

LATE MODEL EQUIPMENT

CRANES: Industrial 50 ton Locomotive Buckeye model 30, new 1940—Rebilt.
Lima ¾ dragline diesel, 1945.
Sterling Krane Kings, 5 ton, 1942.
Orton ⅝ yd., 40' boom, 1946.
COMPRESSORS: I-R K-500 diesel, 1942
I-R 105, rebuilt.
C-P 105, mod. P-G.20, 1942, rubber tires.
ROLLERS: Huber 8-12 ton, diesel, 1943.
Hercules 10 ton 3 wheel, 24" rear rolls.
Littleford 2 ton, model 155, like new.
BULLDOZERS: HD-7W, 1946, Baker hdrl. blade, 2100 hrs.
RD6 Caterpillar, hrdl. angle blade, rebuilt.
PUMPS: Gorman-Rupp jet pumps, 6 cyl. Chrysler, new.
C-M-C 10" centrif. 6 cyl. Waukesha.
Rex 6 sure prime, mtd. Waukesha, rebuilt.
BUCKETS: Williams 1½ yd., 40E, late model, rebilt.
Williams ½ yd. new, gen'l purpose.
Page dragline, ½ yd., Mod. RH, new.
DERRICKS & HOISTS: American-Terry, 70 ton, Stiff-leg, 110' boom.
Wiley, Model F, 30 ton, Stiff-leg, 60' boom comp. w/cables, new.
Steel Stiff Leg, 20 ton, 80' boom, w/2 drum Lambert no power. $1500.00.

Send for our equipment list

R. A. PARKINSON & SON
519 N. Delaware Ave., Philadelphia, 23, Pa.
MARKET 7-2521

INSLEY ½ cy. Truck Crane

30' boom, Waukesha engine, on specially built chassis, outriggers, booster brakes, 6 pneumatic wheels, completely rebuilt free shop New York $7,350.00

BENDIX MACHINERY CO., INC.
401 Broadway, New York 13
Tel: Canal 6-5693

FOR SALE

CRANES

Marion 392—2½ yd. Diesel Crane 100' Boom—New Condition.

Browning #8—20 Ton Steam-Oil Fired—Bargain

Ohio—30 Ton Steam Loco. Crane #3690.

Wiley—30 ton Stiff-Leg—60' Boom—New.

LOCOMOTIVES

25—70 Ton, Four Pocket, all steel HOPPER CARS.
PLYMOUTH—14 ton—36"—Gas. Rebuilt
PLYMOUTH—30 ton—#3940—std. GA. —Cat. D-17,000 Engine
2 WHITCOMB 6 ton 24" Ga.
PORTER 30 Ton, Fireless — std. GA. #7134.

3—American—10 T.—Stiff Legs—75' Boom.

Niles O.E.T. Crane 20 Ton—3 Ton Aux—46'-6" Span—3-60-440.

49—Western 20 Yd. Air Dump Cars.

Ingram 4 Ton Stiff Leg with D.D. Gas Hoist Both New

10—Sterling Diesel Model HCS195H. Equipped Heil 10 Yd. Rock type rear Dump Bodies. New Jan. 47.

Write R. H. BOYER, Mgr. Equip. Division

CHARLES DREIFUS CO.
12 S. 12th Phila. 7, Pa.
Write, Wire or Phone Phone Bell-Walnut 5050

SEARCHLIGHT SECTION

FOR SALE

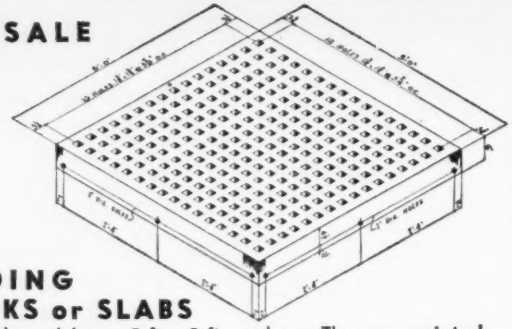

BENDING BLOCKS or SLABS

These blocks or slabs are 5 ft. x 5 ft. as shown. They are semi-steel, in good condition, having only been slightly used on a war-time contract in a shipyard. They are very useful for many purposes, such as for bending table, for layout & assembly work, etc. We also have stands for single blocks, and multiple stands to carry 2, 4, or 8 blocks. We can sell the blocks with or without the stands.

Orders accepted for single blocks or large quantities, as desired.

Write, Phone or Wire at Once!

ACORN IRON & SUPPLY CO.
915 No. Delaware Ave.
Philadelphia 23, Pa.
Phone: WAlnut 2-7070

FOR SALE



Rapid Pavement BREAKER

completely rebuilt at a cost of $3500.00. Retiring from business.

Sacrifice at

$15,000.00

A. H. CARLSON COMPANY
2119 West 71st St., Chicago, Ill.
Republic 7-2700

PAVER

1946 RANSOME-DIESEL MODEL 34E-DUAL DRUM

See It Operate

Ransome's Latest Machine
You Saw One Operating at Chicago

SAVE $12,000 ON YOUR NEXT JOB

Mfg. New 1946—Serial No. 15655
36' 9" Elevating Type Power Boom
Hydraulic Controls—Dual Drum
800 Gallon Auxiliary Water Tank
Cummins HB1D600 DIESEL ENGINE

PORTABLE COMPRESSORS

60 CFM Worthington (Gas) 2 Pneu.
105 CFM Worthington (Gas & Diesel) 4 Pneu.
105 CFM Ingersoll (Gas) with Ford Truck.
160 CFM Worthington (Diesel) 4 Pneu.
210 CFM Worthington (Gas & Diesel) 4 Pneu.
315 CFM Worthington (Gas) 4 Pneu.
500 CFM Chicago (Gas & Diesel) Like New.
500 CFM Worthington (Gas & Diesel)

MIXERS

NEW & REBUILT

3½ S—Ransome Tilter
3½ S—Ransome Non-Tilt
6 S—Ransome Charge Chute
7 S—Rex & Ransome Pow Loadg
10 S—Ransome Chg Chute
14 S—Ransome Chg Chute
16 S—Ransome

Inspect and Be Convinced

AMERICAN AIR COMPRESSOR Corp.
Dell Ave. & 48th St.
North Bergen, N. J.

"Everything for the Contractor"

TRACTORS—D7-CAT.—w/ LeT. Cable Bulldozers & D.D. P.C.U. Used only in 1948—Excellent

TRACTOR—D8-CAT.—w/ LeT. Cable Bulldozer—Rebuilt

TRACTOR—RD8-CAT.—w/ LeT. Cable Bulldozer—Excellent

TRACTOR—TD9-INT.—w/ Fork Lift & Bulldozer—New

FORK LIFT TRUCK—CLARK—3 Ton Cap w/ Crane—Excellent

CHAINS—DRIVE & CROWD—All Sizes—New

PARTS—For All Makes of Tractors & Cranes—New

"Thousands of other construction items"

BABCOCK EQUIPMENT CO., INC.
163 Highland Ave. (On Route 128)
NEEDHAM HEIGHTS 94, MASS.
Tel. NE 3-3040—2929

FOR SALE
Cash or Rental Purchase
Barber-Greene Model 830-840

ASPHALT PLANT

Complete with Dust Collector, Bin, Boiler, Webster Gas Burner, Tanks, Scales. Barber-Greene Finishing Machine, and Huber Tandem Roller. All equipment in excellent condition and can be purchased very reasonable. Will sell all or any part.

Southwest General Construction Co.
703 The Argyle, Oak Lawn at Hall
DALLAS, TEXAS

1—Acme factory rebuilt 12 ton, 3 wheel roller
1—Gasoline powered 5-6 ton tandem, rebuilt.

ACME ROAD MACHINERY CO.
FRANKFORT, N. Y.

CATERPILLAR D-6 LATE 1947
LaPlante Choate Hydraulic Angledozer (1490 hrs). Electric Starter—$8500

INTERNATIONAL HARVESTER TD-9 LATE 1946
Isaacson Hydraulic Bulldozer—$4950

AUSTIN WESTERN 99M MOTOR GRADER 1942
Gasoline power scarifier and cab—$5250

All above in excellent condition and appearance.
IMMEDIATE DELIVERY

EDWARD EHRBAR, INC.
29 Meserole Avenue Brooklyn 22, N. Y.
Evergreen 3-5000

FOR SALE
LINK BELT CRANE
1½ yd. (diesel)
60' boom clamshell digging bucket and fairleads. Wide cats. Completely overhauled.
NEDCAR EXCAVATING CO.
15 William St., Suite 1514, N. Y. 5, N. Y.
Hanover 2-9194

FOR SALE OR RENT
4-D' CATERPILLAR TRACTORS
Complete with Dozers, Like New
GUARANTEED FOR 90 DAYS
Price: $13,990.00 Each
2½ C. Y. BUCYRUS ERIE SHOVEL
Rebuilt Like New Price: $32,750.00
N. A. FINN COMPANY
369 Lexington Av., NYC. LE 2-3868

LORAIN ½ cy. SHOVEL

Combination: backhoe, crane, dragline, Waukesha engine, completely rebuilt, free ship New York. $7,950.00.

BENDIX MACHINERY CO., INC.
401 Broadway, New York 13
Tel.: Canal 6-5693

NEW and REBUILT
STORAGE BATTERY
LOCOMOTIVES
1½ to 10 Ton — 18" to 56" Track Gauge
GREENSBURG MACHINE CO.
Greensburg, Penna.

BRIDGE FOR SALE
80 ft. Pratt Truss Type

ACORN IRON & SUPPLY CO.
915 No. Delaware Ave., Philadelphia 23, Pa.
Phone: WAlnut 2-7070

NEW ENTERPRISE DIESELS

WITH 300 KW IDEAL A.C. GENERATORS
FOR
IMMEDIATE DELIVERY

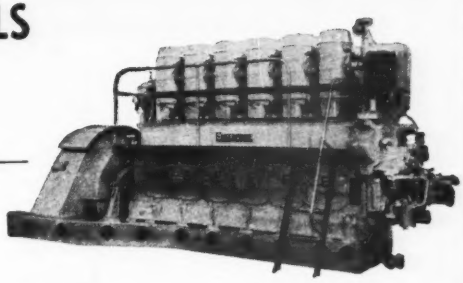

OTHER DIESELS AVAILABLE
UNIT CAPACITIES—10 TO 1420 KVA
A.C.—50 AND 60 CYCLES

A PARTIAL LIST OF OUR INVENTORY

KVA	Make	Model	HP	RPM	KVA	Make	Model	HP	RPM
1420	Fairbanks Morse	38D8⅛	1600	720	312	General Motors	8-268A	450	1200
1250	General Motors	16-278A	1600	720	300	Fairbanks Morse	YVA	360	257
900	General Motors	12-567	1080	720	200	Buckeye	80	240	600
625	Superior	OS	750	327	125	General Motors	3-268A	150	1200
425	Baldwin	VO-6	510	450	75	General Motors	6016-E	90	1200
375	Enterprise	DSG-6	450	450	62	Int'l Harvester	UD-18	76	1200

WRITE FOR COMPLETE INFORMATION

Engineered AGSCO DIESEL POWER

A. G. SCHOONMAKER Company, Inc.

ESTABLISHED 1898

Diesel Engines · Power Machinery

DIESEL DIVISION, 50 CHURCH STREET, NEW YORK 7, N. Y.

FOR SALE OR RENT

SHOVELS

Lorain 82, 1945 Model Shovel & Dragline.
Bay City Model 45, Shovel, Diesel, New.
Osgood Crane, 1945, With new 39" Magnet.
Northwest 28 Shovel & Dragline.
Lorain 75 Shovel, Diesel.

TRACTORS

(2) Caterpillar D-8's. U-Series. Like new.
(1) Caterpillar D-7, 7M Series. With dozer. Good. $6,800.00.
(1) HD-19 With Bulldozer. Break in time.
(1) Factory new D-4 with Bulldozer. Hydraulic.
(1) D-4 & D-2 with Hydraulic Angledozers.
(1) D-8 in 1H5000 Series. Angledozer. $4,800.00.
(4) DW-10's with 10 yd. CW-10 Scrapers.

TRENCHERS

Buckeye Model 410. Like new.
Cleveland Model 95, 110 and 140.
Buckeye Model C-15, 20' x 42" Wide.
P & H Model 10-30.
Parsons Model 310.

BUCKETS AND ATTACHMENTS

New 2 yd. Blaw-Knox Clamshell. $1400.00.
New 2½ yd. Re-Handling. $1600.00.
New Buckeye Model 70, ¾ yd. Attachment. $875.00.
New Link Belt ⅜ yd. Shovel Attachment. $500.00.
New P & H Model 355 Shovel Attachment. $500.00.
New 22-B Crane Boom. 85%.
Used Lorain 82 Crane Boom. $1,000.00.

A. C. R. COMPANY
19615 Nottingham Road, Cleveland, Ohio
Phone: KEnmore 8000



DIESEL GENERATOR PLANTS

1000 KW TO 100 KW

IMMEDIATE DELIVERY

HEMCo

1000 KW, 2400 Volts, 3 Phase, 60 Cycle, 720 RPM, General Motors and Fairbanks-Morse.
750 KW, 2400 Volts, 3 Phase, 60 Cycle, 720 RPM, General Motors.
300 KW, 450/2400 Volts, 3 Phase, 60 Cycle, 1200 RPM, General Motors.
100 KW, AC or DC., 1200 RPM, General Motors.
900 HP, General Motors, Propulsion Unit Complete.
General Motors Quads, Twins, and Singles.
Fairbanks-Morse O. P. Model 38D8 ⅛ Diesel.

HERCULES ELECTRIC MACHINERY and EQUIPMENT CO.

Telephone NEvada 6-2808
Cable Address HEMCOY

1412 So. Alameda Street
Compton, Calif.



DON'T BE SORRY TOO LATE!!

BRAND NEW U. S. A. PRESSURE TYPE

CO_2 FIRE EXTINGUISHER

APPROVED BY U. S. GOVERNMENT

Protect your motorized equipment, tool sheds, work camps, and even your own home and garage. Kills flash fires instantly. Tank is 14" x 3½" can be used more than once. Charged—refillable, good until used, weighs 12 pounds.

REGULAR VALUE $21.50

$9.75

2 for $19.00
6 for $53.00
Shipped F.O.B. Phila.

Will Ship Rated Firms Open Account. Others Send Check.

1744 Shannon Pa.

J. JACOB SHANNON & CO.
214 N. 22nd St., Phila. 3, Pa.
THE OLDEST EQUIP. HOUSE IN PHILA.

FOR SALE

Immediate delivery
From our own warehouse
new and used

Wide Flange Beams

15 pcs.	8" BPS Beams	36#	60'
30 pcs.	10" BPS Beams	42	60/65'
75 pcs.	10" BPS Beams	49	40'
18 pcs.	10" BPS Beams	54	46/48
35 pcs.	12" WF Beams	36	19'10"
20 pcs.	12" BPS Beams	53	46/48'
21 pcs.	12" BPS Beams	65	36'
10 pcs.	12" BPS Beams	65	50'
24 pcs.	21" WF Beams	112	40'
22 pcs.	24" WF Beams	100	30/67'
7 pcs.	30" WF Beams	116	35'
25 pcs.	36" WF Beams	300	40'

ANGLES—2 x 2 x ¼ to 8 x 8 x 1
PLATE—3/16" to 1½" thick
CHANNELS—4" to 15"
SHIP CHANNELS—6" to 12"

We cater particularly to engineer's and contractor's structural steel needs. We carry a complete line of new structural steel shapes, such as standard and wide flange beams, angles, channels and plate. We suggest that you contact us immediately for any material you may need.

HY DRACHMAN STEEL Corp.
Warehouse
14-23 24th Avenue Astoria, L. I.
AStoria 8-8023—8096
Main Office
563 E. Tremont Ave. N. Y. 57, N. Y.
CYpress 9-5440-1

FOR SALE

50-B—Bucyrus-Erie PILE DRIVER

50-B, Bucyrus-Erie, crawler, oil burner, complete with 50-C Super-Vulcan Pile Hammer purchased new recently. 75 ft. sectional boom and leads with telescopic struc for driving batter piles, also purchased new recently. Machine also equipped with shovel, dragline, clamshell attachments.

Latest model machine with cast-steel rotating base and crawler truck frame.

Available immediately.

CHARLES L. VENICE
P. O. Box 5027 Ancon, Canal Zone

FOR SALE

1—TD9 International Tractor w/Bucyrus Bull Grader
1—T6 International Tractor w/Bucyrus Bulldozer
1—Barber-Green Ditcher 44C
1—Insley Shovel/Backhoe Combination
1—10 Yard Woolridge Scraper
1—3 wheel 7 ton roller

FERGUSON CONSTRUCTION CO.
137 Boulevard, NE
Atlanta, Georgia

FOR SALE AT A RIGHT PRICE:

1—Sterling Diesel Tandem Tractor with a new H.B. 600 Cummings Motor. Tractor completely rebuilt two months ago by Sterling Motors.
1—90 Ton Rogers "I" Beam Trailer.
1—Rogers Low-boy with 80 Ton Drop Deck. 750x18 Tires.

WANTED:
1—Model 32 Hanson Shovel Front.

Write **T. J. KILMAIN SALES CO.**
NORTH MT. VERNON AVE. UNIONTOWN, PENNA.
or call Uniontown 5400

NEW PARTS

FOR
Tractors, Graders, Scrapers, Shovels, Cranes, Trench Diggers, etc.

(Allis Chalmers, Caterpillar, International, Barber-Green, Insley, Buckeye, Northwest, Loraine, Turnapull.)

Cutting Edges All Sizes—Fairleads

CEMENT MIXERS
2 Ransome and 1 Rex
Excellent Condition

JULIUS HEBENSTREIT, INC.
56-15 58th St. Maspeth, L. I.
Tel. DAvenport 6-1461
Cable: Habenjul New York

FOR SALE

1—Northwest Model 80D-2½ cu. yd. crawler shovel, crane/drag combination, Murphy Diesel engine.
2—Northwest Model 25 crawler pullshovel crane combination, diesel engine.
2—Northwest Model 25 crawler cranes, gas engine.
1—Northwest Model 25 diesel truck crane, 60' boom.
1—Bucyrus Erie 38-B 1½ cu. yd. crawler shovel, General Motors diesel engine.
1—Marion Model 371 crawler crane/drag combination—gas engine.
1—Manitowoc Model 2000 crawler crane/drag combination—diesel engine.
1—Lima Paymaster crawler pullshovel crane combination—gas engine.
1—Lorain 1¾ yd. crawler diesel shovel.
1—Lorain Model 40 Truck Crane, 35' boom mounted on 10 wheel Mack.
1—P & H ½ cu. yd. crawler pullshovel—gas engine.
1—Koehring Model 205 cruiser crane.

HODGE & HAMMOND, INC.
1100 E. 156 St., New York 59, N. Y.

FOR SALE

1 Model 3500 Manitowoc Shovel D-17000 Caterpillar Motor, 45 Ft. boom, 35 ft. stick, and 100 ft. crane boom with fair lead attachments. Serial #3592.
1 Model 3500 Manitowoc Shovel D 17000 Caterpillar Motor, 45 ft. boom, 35 ft. stick. Serial #3606.
1 Model 820 Lorain Shovel, 2 cu. yd., D 13000 Caterpillar Motor. Serial #17,748.
1 D-8 Caterpillar Tractor with LeTourneau hydraulic blade. Serial #2U-868.
3 D-8 Caterpillar Tractors with Caterpillar cable blades. Serials #2U-1395, #2U-1500, #2U-2291.
1 T D International Tractor with Bucyrus Erie blade. Serial TD-R-4042-T4.
1 LeTourneau Dozer Serial #LD-2371-C2C. New August 1948.

We own the equipment we advertise.

CHARLES P. ALLEN, INC.
1201 Childs Ave. Drexel Hill, Pa.
Tel. Phila. Sunset-7910.

FOR SALE

One Allis-Chalmers model HD 10 W tractor, equipped with Baker model 338A gradebuilder.

Used about six months.

ADDRESS BOX 8 NORTHSIDE STATION
ATLANTA, GA.

FOR SALE

1—Euclid Loader Model BV5, Serial 5BV34 New May 1947—used on one job, 400000 cy. Price—$15,000
7—Terra Cobra Scrapers, 150-HP Cummins engines. These machines new 1946-1947. Less than one year work. Latest improvements including cabs, 12-c.f. air compressors and 24-V generators, drive chains enclosed. All have been overhauled and appearance like new. Will sell in lot or separately.
Price $16,000 each

All above subject to prior sale and F.O.B. St. Paul, Minn.
Terms can be arranged

Address
R. M. Knox—B. S. Crooks
424 Endicott Bldg. St. Paul, Minn.

USED CRUSHERS FOR SALE

Gruendler Hammermills—Two (2) Model 2X and One (1) Model 3X. All in good condition and priced for quick sale.

Telsmith Semi-Portable Gravel Plant complete with crushers, screens, conveyors. Two years old. Priced to sell.

Please write for information on other crushers, feeders and conveyors.

E. F. MARSH COMPANY
4030 CHOUTEAU AVENUE
ST. LOUIS 10, MISSOURI

TRENCHING MACHINE

Cleveland Baby Digger, Model 85, with trailer on Pneumatic tires. Serial #2385. Inquire

C. F. GILGENBACH
R. D. #1, Elyria, Ohio
Phone, Elyria 4-6148

FOR SALE OR RENT

Link Belt Truck Crane

New 1947. T 90—Sectional Boom up to 122 ft.—Back Hoe with High Gantry and Extra Counter Weight—Clam Shell and 3,000 LB. Vulcan Drop Hammer with Leads. Used about six months.
FS-7325, Engineering News-Record
330 West 42nd Street, New York 18, N. Y.

FOR SALE

Northwest #25 ¾ yd. crane, ser. #5530, in good condition, 35 ft. boom, fairleads, shovel front, gas engine.....$8,500.00

AMERICAN CONSTRUCTION CO.
RFD 4, Columbia, S. C. *Phone 2-1840*



G. M. DIESEL

Model 6-278A

Extremely attractive buy

General Motors Marine Diesel, 6 cyl., 2 cycle, 600 shaft horsepower, complete with General Electric D. C. generator, 300 kw. Full accessories. Eight boxes brand new spare parts. Exhaust muffler.

This engine and generator virtually new. Used only a few hours on Navy Training School test stand. In superb condition. Attractively priced for immediate sale.

Write or wire for complete descriptive material.

PETRUS INDUS. MACHINERY SALES
Dept. C
1486 W. 25th St. Cleveland 13, Ohio

STRUCTURAL STEEL

All sizes in stock

I-Beams and Girders
Angle irons—Channels,
Columns, Clintels
Reinforcing Rods & Mesh
Roof Trusses and Buildings.

We design, fabricate and erect.

ACORN IRON & SUPPLY CO.
915 No. Delaware Ave. Philadelphia 23, Pa.
Phone: WAlnut 2-7070

PILE HAMMERS

McKiernan Terry #6-7-10B3
Thoroughly Reconditioned
EDWARD EHRBAR, INC.
29 Meserole Ave., Brooklyn 22, New York
Evergreen 9-5570

---

for IMMEDIATE DELIVERY *of* RUBBER PRODUCTS

CONVEYOR BELTING. TRANSMISSION BELTING. ELEVATOR BELTING. FIRE, WATER, AIR, STEAM, SUCTION and WELDING HOSE.

CALL WIRE WRITE **CARLYLE**
THE RUBBER HEADQUARTERS

CARLYLE RUBBER PRODUCTS ARE NEW, GUARANTEED & LOW PRICED

NEW GUARANTEED

CONVEYOR BELTING

ABRASIVE RESISTANT COVERS

Width	Ply	Top-Bottom Covers	Width	Ply	Top-Bottom Covers
48"	8	1/8" — 1/16"	24"	4	1/8" — 1/32"
42"	5	1/8" — 1/16"	20"	5	1/8" — 1/32"
36"	6	1/8" — 1/16"	20"	4	1/8" — 1/32"
30"	6	1/8" — 1/16"	18"	4	1/8" — 1/32"
30"	5	1/8" — 1/16"	16"	4	1/8" — 1/32"
26"	5	1/8" — 1/32"	14"	4	1/16" — 1/32"
24"	5	1/8" — 1/32"	12"	4	1/16" — 1/32"

Inquire For Prices — Mention Size and Lengths

TRANSMISSION BELTING

HEAVY-DUTY FRICTION SURFACE

	Width	Ply	Width	Ply	Width	Ply
Inquire For Prices — Mention Size and Lengths.	18"	6	10"	6	6"	5
	16"	6	10"	5	5"	5
	14"	6	8"	6	4"	5
	12"	6	8"	5	4"	4
	12"	5	6"	6	3"	4

ENDLESS "V" BELTS

"A" Width All Sizes —
"B" Width All Sizes —
"C" Width All Sizes —
"D" Width All Sizes —
"E" Width All Sizes —

Sold in Matched Sets.
Inquire For Prices — Mention Size and Lengths.

SPECIAL OFFER . . . HEAVY DUTY RUBBER HOSE

FIRE HOSE

APPROVED SPECIFICATION HOSE EACH LENGTH WITH COUPLINGS ATTACHED

I.D. Size	Length	Per Length
2½"	50 feet	$28.00
	25 "	16.00
2"	50 "	23.00
	25 "	13.00
1½"	50 "	20.00
	25 "	11.00

Specify Thread On Couplings

AIR HOSE

I.D. Size	Length	per Length	Universal Couplings
½"	25 feet	$5.00	$1.50 Pair
	50 "	10.00	1.50 Pair
¾"	25 "	7.50	1.50 Pair
	50 "	15.00	1.50 Pair
1"	25 "	10.00	1.50 Pair
	50 "	20.00	1.50 Pair

LARGER SIZES ALSO AVAILABLE
All Prices—Net — F.O.B. New York

WATER HOSE

I.D. Size	Length	per Length	I.D. Size	Length	per Length
¾"	25 feet	$4.25		35 feet	$10.50
	50 "	8.00		40 "	12.00
1"	25 "	6.25		50 "	15.00
	50 "	12.50	1½"	25 "	10.00
1¼"	25 "	7.50		35 "	14.00
				50 "	20.00

Each Length with Couplings Attached

CARLYLE RUBBER CO., Inc.

62-66 PARK PLACE, NEW YORK 7, N. Y. Phone: BArclay 7-9793

2—Browning T-15 truck cranes 25' booms
2—Browning 25-ton steam rail cranes, 50' booms, overhauled

Location vicinity of New York.

HOISTING MACHINERY CO.
50 Church Street New York 7, N. Y.

FOR SALE

11x10 Sullivan Belted Compressor, 50 H.P. Motor.
50 & 20 H.P. D.D. Novo Gasoline Hoists.
50 H.P. D.D. Electric Hoist.
Boiler for Crane: 150 Lb. Steam Pressure.
2 & 3 Drum Steel Hoists.

PITTSBURGH MACHINERY & EQUIPMENT CO.
Aspinwall 15, Pa.

3—CATERPILLAR D-7 hydraulic & cable bulldozers, 3T & 4T series
2—INTERNATIONAL TD-18 wide gauge hydraulic & cable bulldozers, 1948
2—INTERNATIONAL TD-14 wide gauge hydraulic bulldozers, 1947
1—CATERPILLAR D-4 hydr. angledozer & Hyster winch

All shop-repaired. Will consider trade-ins

BENDIX MACHINERY CO., INC.
401 Broadway, New York 13 Tel: Canal 6-5693

FOR SALE

DREDGES and FLOATING EQUIPMENT

H. P. GUION
303 W. 42nd St. New York, N. Y.

CRANES and GRADERS

CRAWLERS

1 Northwest 80-D* ..... 2½ yd.
1 Lima 802* ..... 2 yd.
1 Link Belt Speeder ..... 1½ yd.
1 Loraine Shovel* ..... ¾ yd.
1 Koering* ..... ¾ yd.
1 P. & H.* ..... ¾ yd.
1 Insley* ..... ½ yd.
1 Hanson* ..... ½ yd.

TRUCK CRANES

2 Loraine 30* ..... ½ yd.
2 Loraine 40* ..... ¾ yd.
1 Bay City* ..... ¾ yd.

GRADERS

2 Austin Westerns

TRACKSCAVATOR

1 Caterpillar D-4 W/ dozer blade

*Licensed for export

Most of this equipment has not been worked—the rest has had little use. Priced for quick sale. Location: Staten Island.

JOHN E. FORTE
Plaza Hotel, New York, N. Y. Plaza 9-3000

• FOR SALE •

HOLMES
ENDLESS ROPE
CAR HAUL MACHINE

WITH MOTOR, ELECTRICAL EQUIPMENT AND HAULAGE CABLE.
Complete with rope grips.

Direct Inquiries to:

RAIL TO WATER TRANSFER CORPORATION
101st & Calumet River,
Chicago 17, Illinois

RAILS-TIES
TRACK ACCESSORIES

EVERYTHING FOR THE TRACK FROM
SWITCH TO BUMPER

R. R. TIE PLATES
Excellent Relay
100,000 6½" x 9½" for use with 70# to 80# Rails
50,000 7½" x 10½" for use with 85# to 115# Rails

MORRISON RAILWAY SUPPLY CORP.
RAND BLDG., BUFFALO 3, N. Y. — EMPIRE BLDG., BIRMINGHAM 3, ALA.

- 1 Model 30 Bay City Combination Dragline and Clamshell—U-21 International gas engine. Complete with LaCrosse skeleton trailer, pneumatic tires and oscillating axles. New 1942.
- 1 Used Model 45-B Bucyrus-Erie Combination Dragline and Clamshell—33" wide crawlers (17' long). D-17000 Caterpillar Diesel Engine, 2 cu. yd. dragline and clamshell buckets.
- 1 Used Model 80-D Northwest 2½ Yd. Shovel — Murphy engine, standard crawlers.
- 1 Type 1201 Lima Dragline—long crawlers, wide treads, 100' boom, Cummins Engine, light plant, 3½ yd. dragline bucket. Used 18 months.
- 1 Used Bay City ¾ Yd., ¾ Swing, Tractor Model Shovel—Allis Chalmers Engine, standard crawlers.

E. F. MARSH CO.
4030 Chouteau Avenue
ST. LOUIS 10, MISSOURI

FOR SALE

BATCH PLANT

Cement and aggregate Batch Plant, 160 ton, 4 compartment bin, 600 barrel silo, 3½ yard wet mix hopper, 2 yard Koehring Tilt-Type Mixer. Complete. Purchased new May 1948.

CRANES

Colby Model 200 electric powered Whirley cranes, 45 ton at 30 foot radius. Excellent condition.

PACIFIC BRIDGE COMPANY
333 Kearny Street — San Francisco, Calif.

RAILS
New & Relay
Track Accessories - Steel Storage Tanks
W. H. DYER CO. INC.
1859-X Railway Exchange Bldg.
St. Louis 1 Mo.

FOR SALE
6 Transit Mix Trucks, Macks, Smith—2 yard Mixers
FRAZIER-DAVIS CONSTRUCTION CO.
1319 Macklind Ave. — St. Louis, Missouri
or
1 East 43rd Street — New York, N. Y.

RAIL
STEEL PLATE
STRUCTURALS, PIPE,
TUBING, WIRE ROPE,
FERROUS AND NON-FERROUS SCRAP

BOUGHT-SOLD LIQUIDATED

DULIEN STEEL PRODUCTS, Inc.
of Washington
9265 E. Marginal Way • Seattle 8, Wash. • LAnder 6000

ELECTRIC STRIPPING SHOVEL
FOR SALE

Bucyrus 200-B equipped with crawlers and 10 yd. dipper for loading coal. Good condition, will make excellent 5 yd. stripping shovel.

Foley Brothers, Inc., Colstrip, Montana

NEW—RAILS—Relayers
All sizes and weights. Also frogs, switches, spikes, bolts, tie plates, contractors' and mine equipment carried in stock.

M. K. FRANK
480 Lexington Ave., New York, N. Y. — Park Bldg., Pittsburgh, Pa.
Reno, Nevada — Carnegie, Pa.

FOR SALE
One front end shovel attachment for Insley model KL ⅜ yard machine. One front end shovel attachment for Lima ¾ yard Paymaster.
These attachments have never dug even 1 yd. of earth.
ADDRESS BOX 8 NORTHSIDE STATION
ATLANTA, GA.

New and Relaying
RAILS and ACCESSORIES
Motor Gang and Maintenance Cars
ACORN IRON AND SUPPLY CO.
915 No. Delaware Ave. Philadelphia 23, Pa.
Phone: WAlnut 2-7070

FOR SALE
2—50 KW-3 Phase, 60 cycle 220 volt Superior 6-cylinder Diesel Generator Sets complete with 24 volt Starters & Generators, mounted on heavy Steel frame, condition equal to new.
Priced low for quick sale.
HARLAND G. RICE, INC.
880 River Road — Edgewater, N. J.

FOR SALE
1 D-8 with D.D.P.C.U. only . . . $6,500.00
Serial 1 H 2502
1 D-7 with D.D.P.C.U. only . . . $5,500.00
Serial 7 M 3793
GOOD CONDITION — READY TO WORK
THE GRANDVIEW CONSTRUCTION CORP.
740 South Fulton Ave., Mount Vernon, N. Y.

For Rent or For Sale

1948 Lima 802—2 yard long Cats 125' boom
1948 Lima 604—1½ yard long Cats 100' boom
1947 P & H 855—2 yard long Cats 100' boom 30' jib
1948 Lima Truck Crane 25 ton Capacity 90' boom 30' jib
1946 P & H (150) Truck Crane 10 ton Capacity 50' boom. Brand new ¾ yard back hoe attachment.
1948 P & H 225 A Truck Crane 20 ton Capacity 80' boom
1940 Lorain M.C. 4 Truck Crane 15 ton Capacity 80' boom

The above machines have been used only on steel erection or hook block work and are as good as new.

THE ROGER SHERMAN TRANSFER CO.
EAST HARTFORD, CONN.
Branches: SPRINGFIELD, MASS. NEW HAVEN, CONN. ALBANY, N. Y.

SALE or RENT

1—½ yd. Page Dragline Bucket R.H. New
1—315 cu. ft. Davey Gas Portable Compressor
1—¾ yd. Link Belt Model 75 Gas Shovel & Crane
1—MC-4 Lorain Moto Truck Crane. 1944
2—10-ton American Terry all steel Stiff Leg Derricks
1—25-ton American Diesel Locomotive Crane. New 1942
1—30-ton Ohio Diesel Loco. Crane. New 1946
1—40-ton Orton Diesel Loco. Crane. New 1941
1—30-ton Plymouth Std. Ga. Gasoline Loco. 1943
1—80-ton Lima Type O-6-O Switcher. 1944

B. M. WEISS COMPANY
Girard Trust Co. Bldg., Philadelphia 2, Pa.
Rittenhouse 6-2311

FOR SALE—BUCKETS

Distributors for Pettibone Mulliken Corp.

Clamshell - Dragline - Dipper and Pull Shovel Buckets

1—45 ft Span Overhead Crane 20 Ton
1—Michigan 10 Wheel Truck Crane
1—Lorain 77 Combination Shovel & Crane Gas
1—Lorain 40 Truck Crane

FOLLOWING—Rebuilt and Guaranteed

1—Haiss Wheel Loader Model 77W
1—Bay City 20 Ton Truck Crane

VAN HOUTEN MACHINERY CO.
908 Van Houten Ave. Clifton, N. J.

FOR SALE OR RENT

Rebuilt Northwest Model 25 Truck Crane mounted on 10 wheel Mack complete with outriggers.

HODGE & HAMMOND, INC.
1162 Grinnell Place
New York 59, N. Y.
Dayton 9-5300

For Rent

SPEEDCRANES

LATE MODELS

Manitowoc Diesel Powered Speedcranes for rent. 25, 40 and 50 ton capacities with booms 100' or more. 20' and 30' jibs. Special price on long rentals.

FORSYTHE EQUIPMENT CO., INC.
11 West 42nd St. New York 18, N. Y.
Tel. PEnnsylvania 6-7554

SPECIAL OFFERING

—FOR SALE—

STEEL PLATE GIRDER BEAMS FOR RE-USE

22 Pcs.—32" x 12" Flange x 41 Ft. Long
7 Pcs.—40" x 12" Flange x 32 Ft. Long
12 Pcs.—36" x 12" Flange x 24 Ft. Long

Heavy Duty Riveted, Built-Up Plate and Angle Construction

Must be sold at sacrifice PRICE. ***Drawings furnished upon request.***

ACORN IRON & SUPPLY CO.
915 N. Delaware Avenue, Philadelphia 23, Penna.
Phone—WAlnut 2-7070

SHANNON'S SPECIALS
FOR ALL CONSTRUCTION JOBS

BRAND NEW U. S. NAVY GRAY
WATERPROOF OILSKIN
RAIN COAT
LIGHT WEIGHT WEAR RESISTANT

Made to U. S. Navy specifications, of special treated cloth, has reinforced double stitched seams, adj. cuffs, fly front, deep flap pockets and corduroy collar. Keeps your men on the job. Medium & large sizes.

REGULAR $8.00 VALUE **$3.25** EA.

12 COATS for $36.00
Ship. Charges prepaid

BRAND NEW U. S. NAVY GRAY LIGHT WEIGHT—HIGH BIB WATERPROOF
OVER-ALLS

Made to Navy specifications. Can be worn over outer clothing. Has adj. suspenders. Medium & large sizes.

REGULAR $4.50 VALUE **$2.25**

12 OVER-ALLS, $25.00
Ship. Charges Prepaid

BRAND NEW U. S. NAVY GRAY LIGHT WEIGHT OILSKIN WATER PROOF
RAIN JACKET
Has fly front, corduroy collar. Made to Navy specifications. Medium & large sizes.

$5.00 VALUE **$2.25** 12 JACKETS $25.00

Ship. Charges Prepaid

COMBINATION OFFER
Water proof Over-Alls and Rain Jacket
BOTH FOR **$4.25** 12-2 piece suits . . $48.00
Ship. Charges Prepaid

U. S. NAVY GRAY WATERPROOF SOU'WESTER
Oil Skin Hat 65c Ea $2.00 VALUE
12 HATS FOR $7.00
Ship. Charges Prepaid

TAMPERS • DIGGERS • DRIVERS
1⅛" x 6" Shank, fits std. hammers. Each tool brand new and guaranteed. The government buys only the best. Replace your old tools at a fraction of their regular price. These tools are army surplus.

REG. $14.50 **TAMPERS** 8" x 8" With Stem **$6.00**
REG. $9.30 **CLAY SPADE** 5½" x 8½" **$3.75**
REG. $18.00 **SHEATHING DRIVER** **$6.00**
ALL TOOLS F.O.B. PHILA.

U.S.M.C. NEW SURGICAL STEEL
UTILITY KNIFE
11½" razor sharp blade—better than light axe. Carries flat.

$12.00 VALUE **$1.50** COMP. with SCABBARD
SHP. CHG. 50¢ EXT. EA.

WILL SHIP RATED FIRMS, OPEN ACCOUNT FOB PHILA. OTHERS PLEASE SEND CHECK

J. JACOB SHANNON & CO.
214 N. 22nd St. Phila. 3, Pa.
THE OLDEST EQUIP. HOUSE IN PHILA.

VULCAN
PILE HAMMERS AND EXTRACTORS
NEW OR FACTORY REBUILT
FOR SALE • • • FOR RENT
327 N. BELL AVE., CHICAGO, ILL.

FOR SALE

1—34E Single Drum Multifoote Paver with full Crawlers. Boom, Bucket and Gasoline Engine (Ser. No. 49109) Price $10,000

2—210 Cu. Ft. LE ROI COMPRESSORS. Portable on Rubber Tires with Gasoline Engine (Ser. Nos. 228943 and 228947) Price $2,500 Ea.

All Above Purchased New About One Year Ago.

1—210 Cu. Ft. INGERSOLL RAND COMPRESSOR with Waukesha Diesel Engine, Portable on Rubber Tires (Ser. No. 454851) Price $1,500

T. Edgie Russell
FREDERICK, MARYLAND

FOR SALE

1—Lima Shovel Model 802 Serial No. 3168 combination 70 ft dragline boom and 34 ft. shovel boom, 27 ft. stick, caterpillar D17000 motor, 1 3/4 yd bucket.

1—Loroin 80 Serial No. 10946 Standard shovel front, caterpillar D13000 motor just rebuilt, 1 3/4 yd bucket.

1—Loroin 79 Serial No. 9267 Standard front, caterpillar D13000 motor just rebuilt.

These shovels can be seen working at Duo, W. Va.

Write to

DOMENICK FRANCIOSE
Box 346 Rupert, W. Va.

4—CATERPILLAR D7'S TRACTORS

1 D2 Hydraulic Angeldozer
Like New
3 Angle Dozers, 1 bulldozer
fully reconditioned—also
Galion 101 Diesel Grader—also
1 Rome UD14 Diesel Grader
sacrifice

International Construction Equipment Corporation
58th Street, Cor. Queens Blvd.
Woodside, L. I., N. Y. Phone Ha 9-9210

Caterpillar D82U352 Bare Tractor like new
Caterpillar 12 Patrol 6T—100 HP., also 7T.
Caterpillar D7 Traxavator
2 Allis Chalmers Bare Tractors HD19s

LUKE MILLER
335 Southwest Boulevard
Victor 6312
Kansas City, Missouri

FOR SALE

Link Belt Speeder Crane, 1948 Model HC 70—10% off list price.
Northwest Model 25, 1948, 3/4 yd. Crane & Backhoe—list price.
General Model 307—3/4 yd. Crane & Backhoe $12,000.00
Buckeye Trenching Machine, Model C-20 7,500.00
Austin Trenching Machine, Model 45-21 2,500.00
12 each—8-10 c.y. Bottom dump Euclid Wagons 500.00 each.
3 Model 47 Euclid 8 yd. Bottom Dump Wagons 3,000.00 each.
2 Model L Allis Chalmers Tractors with 8 yd. Model RS-2 Hiel Scrapers 4,000.00 each.

Can be inspected on the job. Immediate delivery.

DRAINAGE CONTRACTORS, INC.
22148 Michigan Ave., DEARBORN, MICH.

PILING

We do a Nation-Wide business in
USED **STEEL SHEET PILING** NEW

RENTED	SOLD	BOUGHT

114 pcs. 43 to 17 ft. Carn. MZ38-Ohio
110 pcs. 70 ft. Carn. M116-New Jersey
54 pcs. 60 ft. Beth. DP2-North Carolina
910 pcs. 55-60-65 ft. Carn. M112-Missouri
200 pcs. 30 to 35 ft. Beth. DP2-Ohio.

Other lengths & sections at various locations

Nos. 0, 1, 2 Vulcan Pile Hammers and Driving Rigs
No. 7 9B3, 10B3, 11B3 McKiernan pile hammers
Nos. 400 and 800 Vulcan Pile Extractors
50-C and 80-C Super Vulcan Pile Hammers
All sizes Pile Hammers & Extractors for Rent
Regardless of location of your job, wire or write

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., St. Louis, Mo.
"WE BUY STEEL PILING FOR CASH"

FOR SALE

STEEL SHEET PILING and H-BEARING PILING

Large quantity of "Z" and M-115 Steel Sheet Piling, new and used, together with large tonnage of H-Beams and Bearing Piling for immediate sale.

Owned and offered by General Contractor.

R. M. LUFF
c/o City Waterworks Plant
Douglasdale Road Richmond, Virginia

FOR SALE
One-half Cu. Yd. Model 15-B

Bucyrus-Erie Shovel Backhoe

35 ft. Crane Boom Fairleads and one-half cu. yd. Dragline bucket. All in perfect mechanical condition.

R. F. Carpenter, *General Contractor*
ALBURG, VERMONT

WANT BUY

ALL SECTIONS
STEEL SHEET PILING

DARIEN CORP.
60 E. 42nd St. N. Y. 17, N. Y.

FOR SALE

NEW—CARNEGIE-ILLINOIS STEEL SHEET PILING

1400' of 21" MZ 32—56#
2000' of 18" MZ 38—57#

GOLDER CONSTRUCTION COMPANY, Inc.
MARKET STREET NATIONAL BUILDING
PHILADELPHIA, 7, Pa. LOcust 7-5484

FOR SALE

One D-6 modified tractor equipped with Hough front end shovel and backfiller blade.

This machine has been used only two days.
ADDRESS BOX 8 NORTHSIDE STATION
ATLANTA, GA.

FOR SALE

SHOVEL & CRANE COMBINATION

KOEHRING 1 1/2 yd. model 604 powered by Caterpillar D-1300 Diesel, complete with crane boom, fairleads, tag line, and shovel front. **PRICED TO SELL**

write:
Box 176, Redford Station Detroit 19, Michigan

FOR RENT

STEEL SHEET PILING

CANDLER AND BASS
Birmingham Theatre Bldg.
Birmingham, Mich.

New And Used

SHEET PILING
STRUCTURAL STEEL

ACORN IRON AND SUPPLY CO.
915 No. Delaware Ave. Philadelphia 23, Pa.
Phone: WAlnut 2-7070

FOR SALE

One Northwest 25 Shovel

backhoe and crane. Northwest 25 backhoe attachment only. Jahn full trailer, low-bed, 22 ton. Sterling truck, 1941, model 96 MC. All in excellent condition, subject to prior sale.

C. Profenno Co., 25 Free St., Portland, Me.

1200 PCS. M-112, 50/55/60 Ft.
450 PCS. DP-2, 40/50/55 & 60 Ft.
377 PCS. MZ-38, 30 to 60 Ft.
300 PCS. MZ-32, 42 to 53 Ft.
300 PCS. DP-1, 45 Ft.

STANHOPE
60 E. 42nd St. N. Y. 17, N. Y.

Used Steel Sheet Piling for sale by owner. Clean, in singles with all battered ends trimmed and new handling holes.

133 pcs. M-116, 33 ft.
80 " AP-3, 30 ft.
124 " M-115, 30 ft.
93 " I-22, 19-5/8"x36, 30 ft.
4 Fab. corner pcs. 22 ft.
12 " toes, 22 ft.

B. B. McCormick & Sons, Inc.
Jacksonville Beach Florida

One	TD-9 Bulldozer at	$5,000.00
One	HD-10 Bulldozer at	7,500.00
One	HD-14 Bulldozer at	9,500.00

These bulldozers are all in very good condition and can be seen at the Chemung Valley Airport, Waverly, New York. Write same address or telephone

Sayre, Pennsylvania 1-7437

RENTAL ➡ STEEL SHEET PILING ⬅ *New and Used*
Large Stocks Available at Warehouses & Field Locations
PILE HAMMERS AND EXTRACTORS FOR RENT

L. B. FOSTER CO. NEW YORK SAN FRANCISCO HOUSTON CHICAGO PITTSBURGH
ADDRESS THE FOSTER OFFICE NEAREST YOU

PIPE

IF IT'S MADE . . . ASK ALBERT

ASK ALBERT • ASK ALBERT • ASK ALBERT

DISTRIBUTORS FOR

• PIPE	• VALVES	• FITTINGS	• PILING
Steel (all types)	Reading Pratt & Cady	Tube Turn Welding Fittings	ARMCO
Wrought Iron	O.I.C. Forged	Tube Turn Forged Steel Flanges	Youngstown
Cast Iron	Cooper Alloy All Stainless	Grabler Screwed Fittings	Pile Points
SPEED-LAY Pipe Systems	Steel–Brass–Iron	Dresser Couplings	Cobi Pile Tips
	Special Alloys	Victaulic Couplings	

• If it's prefabricated—Ask Albert •

Our shops are equipped to cut, bend, coil, weld, bevel, thread and test to your most minute requirements. Experienced men make your layouts and consult with your engineers. Experienced men do the fabrication and behind it all you have ALBERT'S years of efficient service.

ALBERT PIPE SUPPLY CO., INC.

No. 13th & Berry Streets, Brooklyn, N. Y. EVergreen 7-8100

FOR SALE or TRADE
for Construction Equip.
NAVION 1946
Painted Silver—Total 140 Hrs.
Excellent Condition $7500.00
W. J. HALLORAN COMPANIES
303 Chapman Street, Providence 5, Rhode Island

FOR SALE
BACK HOE
One practically new Koehring yard and one half, model 605 with 65 ft. boom, drag line attachment and bucket for list price less discount.
This machine only used three days as back hoe, no days as dragline.
ADDRESS BOX 8 NORTHSIDE STATION.
ATLANTA, GA.

SELLING ON ACCOUNT OF DEATH
BUCKEYE TRENCHER
C-20—Special Boom—digs 27' deep by 52" wide. 6 cyl. twin city gas motor. Fair condition—price $7500.00.
MRS. A. CAPELLO 11745 LONGVIEW
DETROIT 5, MICH. LAKEVIEW 6-9837

FOR SALE—*NEW*
Chain Crowd Shovel Attachment
Including 30' Boom, 25' Stick, 1½ Yd. Pettibone Mulliken Dipper Retract Unit, Split Crowd Sprocket 26" Drum Shell Dipper Trip Chains and Cables 19T Engine Pinion.
LUXNER COAL COMPANY
Carmichaels, Pa. Phone Carmichaels 3751

FOR SALE
6" CAST IRON PIPE
Class 150 NEW
B & S with Fittings—Large Quantity
Immediately Available at No Premium Location, N. J.
FS-8491, Engineering News-Record
330 West 42nd Street, New York 18, N. Y.

NEW DITCHERS
BUCKEYE MODEL 12
Cat. D4400 Engines
10 @ $7500.00 ea. fob S.F.
ADMIRALTY TRADING CO.
110 Market St. San Francisco, Calif.

MICHIGAN TRUCK CRANE
Model TLDT-20. New in 1946. Capacity 12 ton. Equipped with Kohler light plant, 60' boom and 15' Jib oversize tires. Extra counterweight. Located Gary, Indiana. Excellent condition. Will sell or rent.
Owen Type "M" 1¼ Yard Digging Clamshell Bucket, weight 4500#. Used on one job. Wonderful condition. Price to sell
FS-8354, Engineering News-Record
520 North Michigan Ave., Chicago 11, Ill.

FOR SALE
(Subject to Prior Sale)
TRUCK CRANE
1—Model 255A, P&H 15-ton crane, 60 ft. boom, Mack truck
CALLAN CONSTRUCTION CORPORATION
Bristol, Rhode Island Phone: Bristol 124

FOR SALE
14 BOTTOM DUMP EUCLIDS
5—13 CY with General Motors Diesel
8—13 CY with HB Cummins Diesel
1—13 CY with NH Cummins Diesel (175HP)
These units are priced to sell quick!
FS-8627, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

GAS DRIVEN ELECTRIC WELDERS
200 Amp. Lincoln Model 6090
300 Amp. Lincoln Model S-7065
Single-owner — purchased new 1948—used one job
PRICED TO SELL
write: Box 176, Redford Station
Detroit 19, Michigan

FOR SALE
2—Shovel Front Attachments
Complete for a ¾ yd. Osgood or General and Lorrain Model LS 40.
ABBOTT SALVAGE COMPANY
1087 Clinton St. Buffalo 6, N. Y.

PIPE
VALVES and FITTINGS
All Sizes in Stock
NEW—USED
GREENPOINT IRON & PIPE CO., INC
Bogart and Stagg Streets Brooklyn, N.Y.

Cast Iron B & S
PIPE and FITTINGS
STEEL PIPE and VALVES
• ACORN IRON AND SUPPLY CO.
915 No. Delaware Ave., Philadelphia 23, Pa.
Phone: WAlnut 2-7070

WROUGHT Steel Pipe
FITTINGS
VALVES
BOILER
TUBES
ALBERT & DAVIDSON PIPE CORPORATION
2nd AVENUE...50th-51st STREET
BROOKLYN 32, N. Y.
Windsor 9-4300

---

100 KW Buda Diesel Generator Sets
6 hour test run
actual use
Priced to sell
ARKO PRODUCTS CO., INC.
546 Second Avenue Detroit 26, Mich.

SURVEYING INSTRUMENTS

USED • REBUILT • SALE • RENT • REPAIRING

INSTRUMENT REPAIR BY CRAFTSMEN

Our craftsmen have a completely equipped department fully able to accommodate the repair of all makes of transits, levels and measuring tape. Work includes thorough overhaul, cleaning, oiling and adjustment.

Precision work guaranteed.

DAVID WHITE COMPANY
317 W. Court St., Milwaukee 12, Wis.

FROM STOCK
Brand New & Rebuilt
TRANSITS & LEVELS
Fully equipped modern shop—all makes and models repaired — all work guaranteed — instruments rented

Midwest Representative: W. & L. E. Gurley

NATIONAL BLUE PRINT CO.
Established 1914.
210 S. Canal St. Chicago (6), Ill.

TRANSITS and LEVELS

Immediate delivery on expertly rebuilt, well-known makes. All makes of instruments repaired. Work guaranteed

Write for used instrument list today

J. H. WEIL & CO.
1325 CHERRY ST. PHILADELPHIA, PA.
GURLEY REPRESENTATIVES

RE-BUILT REPAIR RENT SALE EXPERTS
BUFF
ALL MAKES

69 Day St., New York

WE REPAIR—all makes
SELL—new and used
RENT—near new equipment

GRINER & SCHMITZ
3012 McGee Trafficway
KANSAS CITY 8, MO.

TRANSITS AND LEVELS

New or Rebuilt Sale or Rent

Headquarters for REPAIRS — any make — Factory Service. We will also buy your old instruments or take them in *trade*. A complete line of Engineering Instruments and Equipment for field or office. Write for catalog N.R.-94

WARREN-KNIGHT CO.
Manufacturers of Sterling Transits and Levels
136 No. 12th St., Philadelphia 7, Penna.

GURLEY
SURVEYING INSTRUMENTS
NEW • REBUILT

Replace your platinum wire or spider web reticle with the exclusive new Gurley *glass* reticle.

Patterns to suit every surveying need.

W. & L. E. GURLEY
Union Plaza, Troy, New York

SPECIALIZED REBUILDING
of surveying and engineering instruments
All makes and models expertly repaired in modern shop. All work guaranteed.
USED REBUILT INSTRUMENTS
for sale or rent
ROY D. HICKERSON
40 JOHNSON AVE INDIANAPOLIS 19, IND.

EVERY ISSUE
EVERY WEEK
Advertising of USED and Surplus New Construction Equipment is now accepted for all issues in the
SEARCHLIGHT SECTION of ENGINEERING NEWS-RECORD

SEARCHLIGHT SECTION

(Classified Advertising)

Abbott Salvage Co. 187
Abramsen Co., Inc., John J. 174
Acme Road Machinery Co. 180
Acorn Iron & Supply Co. 175, 176, 178, 180, 183, 184, 185, 186, 187
Admiralty Trading Co. 187
Air Compressor Rental Co. 181
Albert & Davidson Pipe Corp. 187
Albert Pipe Supply Co. 187
Allen, Charles P. 182
American Air Compressor Corp. 180
American Construction Co. 182
American Enka Corp. 173
Arko Products Company Inc. 187
Babcock Equipment Co., Inc. 180
Bauer, L. W. 174
Bendix Machinery Co., Inc. 178, 179, 180, 183
Bernstein Brothers 178
Bixby Inc., R. W. 173
Bradford Supply Co. 178
Buff 188
Bunce, Herman E. 187
Callan Construction Corp. 186
Candler & Bass, Inc. 186
Cappello, A. 187
Carlson Co., A. H. 180
Carlyle Rubber Co., Inc. 183
Carpenter, R. F. 186
Cole's Trucking Service 186
Contractors Machinery Co. 176
Crooks, B. S. 182
Darien, Corp. 186
Detroit Civil Service Comm. 172, 173
Drachman Steel Corp., Hy. 182
Drainage Contractors Inc. 186
Dreifus Co., Charles 179
Dulien Steel Products, Inc. 184
Dyer Co., The W. H. 184
East Coast Valve & Fitting Co., Inc. 174
Ehrbar Inc., Edward 176, 179, 183, 180
Ellis-Novack Co. 175
Equipment Corp. of America 179
Ferguson Construction Co. 182
Finn Co., N. A. 180
Foley Brothers Inc. 184
Foster Co., L. B. 186
Forsythe Equip. Co., Inc. 185
Forte, John E. 184
Frank, M. K. 184
Frazier-Davis Construction Co. 184
Gilgenbach Co., C. P. 182
Golder Construction Co., Inc. 186
Grandview Constr. Corp. 184
Greensburg Machine Co. 180
Greenpoint Iron & Pipe Co., Inc. 187
Griner & Schmitz 188
Guion, H. P. 183
Gurley, W. & L. E. 188
Halloran, W. J. 187
Hebenstreit, Julius 182
Hercules Elect. Machy. & Equip. Co. 181
Hickerson, Ray D. 188
Hodge & Hammond, Inc. 176, 182, 185
Hoisting Machinery Co. 183
Ingersoll Co., The Chas. M. 175
International Const. & Equip. Corp. 186
International Hoist & Machine Co. 178
Jutton-Kelly Co. 174
Kane & Associates, Valentine B. 174
Kilmain Sales Co., Inc., T. J. 182
Knox, R. M. 182
Lewis, Harry C. 175
Luff, R. M. 186
Luzner Coal Co. 187
McCormick & Sons Inc., B. B. 186
Marsh Co., E. F. 182, 184
Martindale, Frank L. 173
Miller, Machinery Sales Luke 186
Mississippi Valley Equip. Co. 176, 186
Morrison Railway Supply Corp. 184
National Blue Print Co. 188
Nedcar Excavating Co. 180
Newburgh Downtown Realty Corp. 175
Olympic Commissary Co. 174
O'Neill, A. J. 179
Pacific Bridge Co. 184
Parkinson & Son, R. A. 179
Petrus Industrial Machy. Sales 183
Pittsburgh Machy. & Equip. Co. 183
Profenno Co., Camillo 186
Queensboro Steel Corp. 179
Rail to Water Transfer Co. 184
Rice, Inc., Harland G. 184
Russell, T. Edgie 186
Schoonmaker Co., Inc., A. G. 181
Shannon & Co., J. Jacob 181, 185
Sherman Transfer Co., The Roger 185
Smith Inc., L. B. 175, 176, 177
Southwest General Construction Co. 180
Stanhope Inc., R. C. 176, 186
Tamblyn System 174
Thompson Co., Inc., J. Parker 178
Tractor & Equipment Co. 176
Twentieth Century Builders Corp. 172
United States Dept. of Interior 175
Van Houten Mchy. Co. 185
Venice, Charles L. 182
Villiro Equipment Co. 178
Vulcan Iron Works 185
Walsh, J. T. 174, 178
Walsh Co., Richard P. 176
Warren-Knight Co. 188
Weil & Co., J. H. 188
Weiss, B. M. 185
Wepco Equipment Co. 178
White Co., David 188
Wikstrom Inc., A. S. 174
Wilson Engineering Corp. 174

Cards are arranged alphabetically by states - cities - names

PROFESSIONAL SERVICES

Additional cards are to be found on pages following

Palmer and Baker, Inc.

Consulting Engineers

For Problems of Transportation
Subaqueous Vehicular Tunnels
Rock Tunnels
Utility Tunnels
Bridges
Grade Separations
Highways
Airports
Traffic Studies
Parking Problems
Waterfront & Harbor Structures

Mobile, Alabama

Polk, Powell and Hendon

Engineers—Consultants

Harry H. Hendon—
Hugh A. Powell

Water Systems, Sewers and Sewage Treatment Plants, Steam and Hydro Plants, dams, drainage, industrial buildings, municipal planning reports, plans, estimates and construction supervision.

620 Chamber of Commerce Bldg.,
Birmingham 3, Ala.

John S. Cotton

Consulting Engineer

Hydroelectric, water supply, irrigation, and multiple purpose projects; flood and erosion control; river basin development planning; dams and their foundations; tunnels; marine structures; valuations; rates.

28 Brookside Dr., San Anselmo, Calif.

Heron Engineering Co.

Chemical, Mining, Industrial and Hydraulic Plants, Irrigation, Water Supply, Power and Sewerage Systems, Large Rockfill Dams, Airports, Oil, Gas and Water Pipe Lines.
2000 So. Acoma, Denver 10, Colorado
Chama, New Mexico

Industrial Drilling and Boring Corp.

FOUNDATION BORINGS
GEOLOGICAL SURVEYS

P. O. Box 1206 — 1746 E. Adams St.
Jacksonville, Florida

Patchen & Zimmerman

Engineers

Construction Plant, Cofferdams, Structures, Industrial Plants, Dams, Sewerage and Sewage Treatment, Water Supply and Treatment, Supervision, Surveys, Reports.
Daniel Field Airport.
Augusta, Ga.

Alvord, Burdick & Howson

Charles B. Burdick
Louis B. Howson Donald H. Maxwell

Consulting Engineers

Water Works	Sewerage
Water Purification	Sewage Treatment
Flood Relief	Power Generation
Drainage	Appraisals

Room 1401
20 North Wacker Drive, Chicago

Consoer, Townsend & Associates

Water Supply—Sewerage—Flood Control & Drainage — Bridges — Express Highways—Paving—Power Plants, Appraisals — Reports — Traffic Studies — Airports.
351 East Ohio St., Chicago 11, Illinois

C. D. Cook & Co.

Licensed Structural Engineers

Designing—Detailing—Tracings
Quantity Surveying
608 S. Dearborn St., Chicago, 5, Ill.
TEL.: HArrison 7-2270

Greeley and Hansen

Engineers

Water Supply, Water Purification
Sewerage, Sewage Treatment
Flood Control, Drainage, Refuse Disposal

220 S. State Street, Chicago 4

The Gulick-Henderson Laboratories, Inc.

Inspecting & Testing Engineers

524 Fourth Avenue, Pittsburgh 19, Pa.
25 West 43rd St., New York 18, N. Y.
431 South Dearborn St., Chicago 5, Ill.

De Leuw, Cather & Company

CONSULTING ENGINEERS

Transportation, Public Transit and Traffic Problems

Industrial Plants	Grade Separations
Railroads	Expressways
Subways	Tunnels
Power Plants	Municipal Works

150 North Wacker Drive
Chicago 6, Ill.

79 McAllister Street
San Francisco 2, Calif.

Harza Engineering Co.

Consulting Engineers

L. F. Harza
E. Montford Fucik Calvin V. Davis
Hydro-Electric Power Projects, Transmission Lines, System Management, Dams, Foundations, Harbor Structures, Soil Mechanics.
400 W. Madison St., Chicago 6, Ill.

Hazelet & Erdal

Consulting Engineers.

Fixed and Movable Bridges	Designs
	Supervision
Superhighways	Investigations
Industrial Bldgs.	Reports
Airports	Dams
	Surveys

Monadnock Block, Chicago 4, Ill.
Dixie Terminal Bldg., Cincinnati 3, O.
Heyburn Bldg., Louisville 3, Ky.

Pioneer Service & Engineering Co.

Consulting and Design Engineers
Operations - - - Purchasing
Steam - - Hydraulic - - Gas
Public Utilities - - - Industrials

231 So. La Salle St. Chicago 4

Sargent & Lundy

ENGINEERS

Steam and Electric Plants
Utilities—Industrials
Studies—Reports—Design
Supervision
Chicago

Interstate Engineering

Consulting Engineers.

Design and Supervision of Municipal Improvements
Water Works, Sewage, Drainage, Surveys
Foundation Borings
Rock Island, Illinois.

Jenkins, Merchant & Nankivil *Consulting Engineers*

Water Systems, Power Development, Flood Control, Airports, Traffic Surveys, Municipal Improvements, Sewerage, Industrial Plants, Recreational Facilities, Investigations and Reports.
805 East Miller St., Springfield, Ill.

Moore & Owen

Engineers

Water, Sewage, Incineration Refuse Disposal, Airfields.
Complete Water & Sewage Laboratories—Industrial Wastes.
1456 N. Delaware St., Indianapolis 2, Ind.

Boyd E. Phelps, Inc.

Engineers

Water Supply and Purification
Sewage and Industrial Waste Treatment
Power Generation, Airfields, Reports, Investigations, Appraisals.
622½ Franklin St., Michigan City, Ind.

Chas. W. Cole & Son

Sewerage, Sewage Treatment, Industrial Wastes, Water Supply, Water Treatment, Airports, Industrial Buildings.
Chas. W. Cole, Sr. Chas. W. Cole, Jr.
Ralph J. Bushee, M. J. McErlain
Wilber H. Gartner

220 W. LaSalle, South Bend, Ind.

Stanley Engineering Company, *Consulting Engineers*

Airports - Drainage - Electric Power
Flood Control - Industrial - Rate Studies - Sewerage - Valuations - Water Works
Hershey Building, Muscatine, Ia.

G. Douglas Andrews Associates

Engineering Consultants

General Engineering and Consulting Services
Valuations and Management
212 Washington Avenue
Towson, Baltimore 4
Maryland

Saxe, Williar & Robertson

ENGINEERS • CONSULTANTS

Industrial Buildings
Bridges - Structures - Foundations
Highway & Regional Planning
Harbor Works • Port Development
Reports • Investigations

130 West Hamilton St.,
Baltimore 1, Maryland

Whitman, Requardt and Associates

Engineers — Consultants

Civil — Sanitary — Structural
Mechanical — Electrical
Reports, Plans, Supervision, Appraisals

1304 St. Paul Street
Baltimore 2, Maryland

Chas. T. Main, Inc.

Engineers

Design and Supervision of Construction for Industrial Plants
Electrical, Steam and Hydraulic Engineering
Investigations, Reports and Appraisals
Chamber of Commerce Bldg.
80 Federal St., Boston, Mass.

Metcalf & Eddy

ENGINEERS

Investigations Reports Design
Supervision of Construction and Operation
Management Valuation Laboratory

Statler Building, Boston

Philip B. Streander and Affiliates

Consulting Sanitary Engineers

Water Supply, Treatment, Distribution
Sewage, Sewage Treatment
Plans, Supervision, Reports
120 Tremont Street, Boston 8, Mass.

Burns & McDonnell Engineering Company

Consulting Engineers 50th Year

Water Works, Light and Power, Sewerage, Reports, Designs, Appraisals Rate Investigations.
Box 7088 Country Club P. O.
95th & Troost, Kansas City 2, Mo.

Black & Veatch

Consulting Engineers

4706 Broadway
Kansas City, Missouri

Sewerage, Sewage Disposal, Water Supply, Water Purification, Electric Lighting, Power Plants, Valuations, Special Investigations, Reports and Laboratory Service

E. B. Black E. L. Filby
A. P. Learned N. T. Veatch, Jr.
F. M. Veatch J. F. Brown
R. E. Lawrence

Harrington & Cortelyou

Consulting Engineers

Frank M. Cortelyou
E. M. Newman F. M. Cortelyou, Jr.
Movable and Fixed Bridges of All Types, Foundations, and Related Structures
1004 Baltimore Kansas City 6, Mo.

Russell & Axon

Consulting Engineers

Geo. S. Russell F. E. Wenger
Joe Williamson, Jr.
Water Works, Sewerage, Sewage Disposal, Industrial and Power Plants, Appraisals.
408 Olive Street Municipal Airport
St. Louis 2, Mo. Daytona Beach, Fla.

Sverdrup & Parcel

Consulting Engineers.

Bridges, Structures and Reports.
Industrial and Power Plant Engineering.

Syndicate Trust Bldg., St. Louis 1, Mo.

A. L. Alin

Consulting Engineer

Dams
Hydroelectric Power
Flood Control

5927 North 24th St.
Omaha 11, Nebraska

Benjamin L. Smith & Associates

Engineers

Investigations—Reports
Designs—Supervision—Valuations
Municipal Engineering and Public Utilities
11 North Pearl St. Albany 7, N. Y.

E. Lee Heidenreich, Jr.

Consulting Engineer

Quarries	Plant Layout
Crushing Plants	Storage
Milling Plants	Methods
Concrete Products	Design
Plants	Appraisals

67 Second St. Newburgh, New York

Andrews & Clark

CONSULTING ENGINEERS

DESIGN—CONSTRUCTION
SUPERVISION—REPORTS

385 East 43rd Street
New York 21, N. Y.

Barker & Wheeler

Water Supply	Utility and
Sewerage	Industrial
Sewage Disposal	Valuations
Power Systems	Reports

New York City, 11 Park Place
Albany, N. Y., 36 State St.

Clinton L. Bogert Associates

Consulting Engineers

Water and Sewage Works
Refuse Disposal Industrial Wastes
Drainage Flood Control

624 Madison Ave., New York 22, N. Y.

Bowe, Albertson & Associates *Engineers*

Sewerage—Sewage Treatment
Water Supply—Purification
Refuse Disposal—Analyses
Valuations—Reports—Designs
110 William St., 2082 Kings Hgway.
New York 7, N. Y. Fairfield, Conn.

Buck, Seifert & Jost

Consulting Engineers

(Formerly Nicholas S. Hill Associates)

Water Supply Sewage — Hydraulic Developments, Reports and Valuations, Chemical and Biological Laboratories.
New York City, 112 E. 19th St.

Christiani & Nielsen

ENGINEERS

Harbor works - Bridges - Foundations - Industrial Buildings - Power Plants - Dams - Tunnels - Highways - Railroads

350 Fifth Ave., New York 1, N. Y. Buenos Aires Rio de Janeiro Lima Montevideo Caracas Mexico Bogota

Paris London The Hague
Stockholm Oslo Copenhagen
Cape Town Bangkok

Cards are arranged alphabetically by states - cities - names

PROFESSIONAL SERVICES

Additional cards are on preceding and following pages

L. Coff

Consulting Engineer

Prestressed Concrete
Bridges and Frames

198 Broadway — New York 7, N. Y.

Hugh L. Cooper & Co.

Incorporated

General Hydraulic Engineering

Including the design, financing, construction and management of hydro-electric power plants.

350 Fifth Ave., New York 1, N.Y.

Ebasco Services Incorporated

Engineers - Constructors
Business Consultants
Design and Construction
Financial and Operating Consultation
Investigations and Reports
Consulting Engineering

Two Rector Street — New York

Fay, Spofford & Thorndike

Engineers

Charles M. Spofford — Ralph W. Horne
John Ayer — William L. Hyland
Elon A. Bowman — Frank L. Lincoln
Carroll A. Farwell — Howard J. Williams

Bridges and Industrial Plants
Water Supply and Sewerage Works
Port and Terminal Works — Airports

Valuations, Investigations, Designs, Supervision of Construction.

11 Beacon St., Boston, Mass.
420 Lexington Ave., N. Y.
(Graybar Bldg.)

Fraser-Brace Engineering Co., Inc.

DESIGN - CONSTRUCTION - REPORTS - APPRAISALS
COMPLETE MANAGEMENT OF PROJECTS

10 East 40th St.,
New York 16, N. Y.

Hardesty & Hanover

Consulting Engineers

Successors to Waddell & Hardesty

Bridges
Long Spans of All Types
Movable - Lift, Bascule and Swing
Hanover Skew Bascule
Steel and Concrete Spans
Grade Crossing Eliminations

Other Structures
Foundations
Supervision, Reports, Appraisals

101 Park Avenue, New York 17, N. Y.

Frederic R. Harris

FREDERIC R. HARRIS, INC.

ENGINEERS

DESIGNS — MANAGEMENT
REPORTS — APPRAISALS

Harbor & Waterfront Work, Floating Drydocks, Port Development, Hydro-Electric Development, Flood Control, Water Supply, Sanitary & Industrial Waste Disposal.

New York — 27 William Street
Philadelphia — Fidelity-Phila. Bldg.
San Francisco — Ferry Bldg.
Vera Cruz, Mexico

Howard, Needles, Tammen & Bergendoff

Consulting Engineers

Bridges and Structures

New York, N. Y., 55 Liberty St.
Kansas City, Mo., 921 Walnut St.

Lockwood, Kessler & Bartlett, Inc.

ENGINEERS — SURVEYORS

General Engineering Services
Aerial and Ground Surveys
Photogrammetric Mapping
Domestic and Foreign

32 Court St. — Brooklyn 2, N. Y.

Knappen Tippetts Abbett Engineering Co.

Ports, Harbors, Flood Control, Power, Dams, Bridges, Tunnels, Highways, Subways, Airports, Traffic, Foundations, Water Supply, Sewerage, Reports, Design, Supervision, Consultation.

62 West 47th Street, New York City

Modjeski and Masters

Consulting Engineers

Design, Supervision, Reports, Inspection and Investigations, of Bridges, Structures, and Foundations.

535 Fifth Ave., New York, N. Y. — State Street Bldg. Harrisburg, Penna.

Moran, Proctor, Freeman & Mueser

Consulting Engineers

Foundations for Buildings, Bridges and Dams; Tunnels, Bulkheads, Marine Structures; Soil Studies and Tests; Reports, design and supervision.

New York 17, N.Y., 420 Lexington Ave.

PARDO, PROCTOR, FREEMAN & MUESER
Ap. Correos 614 — Caracas, Venezuela.

Parsons, Brinckerhoff, Hall & Macdonald

ENGINEERS

Airports, Bridges, Tunnels, Highways, Traffic and Transportation Reports, Subways, Foundations, Harbor Works, Valuations, Power Developments, Industrial Buildings, Dams, Sewerage, Water Supply.

51 Broadway, New York 6, N. Y.

Malcolm Pirnie Engineers

Civil & Sanitary Engineers

Malcolm Pirnie — Ernest W. Whitlock
Richard Hazen — G. G. Werner, Jr.

Investigations, Reports, Plans, Supervision of Construction and Operations — Appraisals and Rates

25 W. 43rd St., New York 18, N. Y.

The Pitometer Company

Engineers

Water Waste Surveys
Trunk Main Surveys
Water Distribution Studies
Penstock Gaugings

New York, 50 Church St.

Alexander Potter Associates

Consulting Engineers

Water Works, Sewerage, Industrial Wastes, Hydraulic Works, Reports, Designs, Appraisals.

50 Church St., New York, N. Y.

Clyde Potts

Weston Gavett-Stanley N. Williams
Consulting Sanitary Engineers

Sewerage and Sewage Disposal
Water Works and Water Supply
Valuations and Appraisals

30 Church Street, New York 7

Sanderson & Porter

Engineers and Constructors

New York — Chicago
San Francisco — Los Angeles

Scheidenhelm, F. W.

Consulting Engineer

Hydraulic Engineering; Hydro-electric Developments; Water Supply; Flood Control; Engineering Problems relating to Water Rights and Water Power Law; Appraisals. 50 Church Street, New York 7, N. Y.

Seelye, Stevenson & Value

Consulting Engineers

Successors to
Elwyn E. Seelye & Company
101 Park Avenue
New York 17, N. Y.

Airports, Highways, Dams, Concrete, Steel, Welding, Foundations, Stadia, Appraisals & Industrial Plants.

Elwyn E. Seelye, Albert L. Stevenson, Burnside R. Value
L. C. Hammond, H. S. Woodward, Austin M. Rice, C. H. Hamilton, V. J. Pacello, C. M. Throop, R. Sahlberg, W. D. Bailey, J. U. Wiesendanger, P. King.

Frederick Snare Corporation

Engineers—Contractors

Harbor Works, Bridges, Power Plants, Dams, Docks and Terminals.

Difficult and Unusual Foundations A Specialty.

233 Broadway, New York City 7
1429 South Penn Square, Philadelphia

Havana, Cuba — Lima, Peru
Bogota, Colombia, Caracas, Venezuela
San Juan, Puerto Rico, Guayaquil, Ecuador

D. B. Steinman

Consulting Engineer

Bridges
Design, Construction, Strengthening, Investigations, Reports, Advisory Service.

117 Liberty St., New York 6, N.Y.

Sy-Co Engineers

G. A. Syversen, G. Randolph Syversen
H. Syversen—Consultants
Industrial Plants, Commercial Buildings, Power Plants,
Materials Handling Systems
Estimates—Reports—Design
Supervision

39 Broadway — New York 6, N. Y.

Taylor, Henry W.

Water Supply, Sewerage
Garbage Disposal, Incineration
Industrial Wastes Disposal
Hydraulic Developments

11 Park Place, New York City

The J. G. White Engineering Corporation

Design—Construction
Reports—Appraisals

80 Broad Street, New York 4

James M. Caird

Established 1898

C. E. Clifton, H. A. Bennett
Chemists and Bacteriologist
WATER ANALYSIS
Tests of Filter Plants

Cannon Building, Troy, N. Y.

Keis & Holroyd

Consulting Engineers

Formerly Solomon & Keis
Since 1906
Water Supply, Sewage Disposal, Garbage & Refuse Incineration, Industrial buildings

Troy, N. Y. — Ft. Lauderdale, Fla.

The F. A. Schneider Co.

Consulting Engineers

Commercial Buildings, Process Plants, Layouts & Design.

Box 310, Bucyrus, Ohio

The Austin Company

Design and Construction

Manufacturing and Process Plants
Airports & Air Transport Buildings
Railroad Terminals and Facilities
Power Plants—Industrial & Institutional
Industrial Office Buildings and Laboratories
Reports and Plant Location Surveys

New York — CLEVELAND — Los Angeles
Chicago — Houston — Oakland
Detroit — Seattle

Havens and Emerson

W. L. Havens — C. A. Emerson
A. A. Burger — F. C. Tolles — F. W. Jones
CONSULTING ENGINEERS
Water, Sewage, Garbage, Industrial Wastes, Valuations—Laboratories

Leader Bldg. — Woolworth Bldg.
Cleveland 14 — New York 7

Jones, Henry & Schoonmaker

(Formerly Jones & Henry)

Consulting Sanitary Engineers

Water Works, Sewerage & Treatment
Waste Disposal

Security Building — Toledo 4, Ohio

Benham Engineering Co.

ENGINEERS

Webster L. Benham
M. Am. Soc. C. E.
Water Supply & Purification, Sewerage, Sewage Disposal, Electric Light & Power, Roads, Drainage
Am. National Bldg., Oklahoma City, Okla.

Capitol Engineering Corporation

Engineers—Constructors—Management

Bridges — Dams
Planning — Airports
Sewage Systems — Water Works
Design and Surveys — Roads & Streets
Executive Offices Dillsburg, Penna.

Brookhart & Tyo, Inc.

Engineers

Highways
Industrial Buildings
Bridges and Structures
Design, Estimates, Reports

6th & Maclay Sts. — Harrisburg, Pa.

Gannett Fleming Corddry & Carpenter, Inc.

ENGINEERS

Water Works, Sewage, Industrial Wastes & Garbage Disposal — Roads, Airports, Bridges & Flood Control, Town Planning, Appraisals, Investigations & Reports.

Scranton Pa. — Pittsburgh, Pa.
Harrisburg, Pa. — New York, N. Y.

Albright & Friel, Inc.

Consulting Engineers

Water, Sewage and Industrial Waste Problems, Airfields, Refuse Incinerators, Power Plants, Industrial Buildings, City Planning, Reports, Valuations, Laboratory.

1528 Walnut St., Philadelphia 2, Pa.

Day & Zimmermann, Inc.

Engineers

Designs, Construction, Valuations
Reports and Management
Public Utilities and Industrials

Philadelphia
New York — Packard Building — Chicago

Cards are arranged alphabetically by States - cities - names

PROFESSIONAL SERVICES

Additional cards are to be found on preceding pages

Frederick H. Dechant
ENGINEER
Associated with Frederic R. Harris
Water Works, Industrial Wastes,
Sewerage, Recovery Processes,
Hydraulic Works, Steam, Hydro
Gas Power Plants.
Philadelphia Fidelity Phila. Trust Bldg.
New York 27 William St.

Fridy - Gauker - Truscott & Fridy
Architects & Engineers
Water . Sewerage . Industrial Waste
Incineration . Power & Distribution
Airport . Building . Town Planning
1321 Arch Street . Philadelphia 7, Pa.

William A. Goff, Inc.
General Engineering and Consulting Services
Water, Sewerage, Refuse Incineration,
Industrial Buildings, Power Plants,
Airports, Town Planning, Plans,
Supervision, Valuations, Reports.
Broad St. Station Bldg., Phila. 3, Pa.

Hunting, Larsen & Dunnells
Engineers
Industrial Plants—Structures
Bridges—Steel and Reinforced Concrete
Design and Supervision—Reports
1150 Century Bldg., Pittsburgh, Pa.

When you need a SPECIALIST in a hurry . . .

Engineering News-Record's Professional Service Section offers the quickest, most direct method of contacting consultants who may be available NOW.

Sanders & Thomas, Inc.
Structural & Mechanical Engineers
1352 W. Girard Avenue,
Philadelphia 23, Pa.
Security Trust Building, Pottstown, Pa.

Morris Knowles, Inc.
Engineers
Water Supply and Purification, Sewerage and Sewage Disposal, Valuations, Laboratory, City Planning.
Pittsburgh, Pa.

Gilbert Associates, Inc.
Engineers and Consultants
Design and Supervision of
Steam, Hydro, Water Supply,
Sewage Disposal, Diesel Plants
and Airports, Valuations, Laboratory
Reading, Pa. 412 Washington St.
New York 61 Broadway
Houston Oil & Gas Building
Washington, D. C. 1417 K St., N. W.

Michael Baker, Jr., Inc.
THE BAKER ENGINEERS
CIVIL ENGINEERS, PLANNERS, AND SURVEYORS.
MUNICIPAL ENGINEERS
Airport Design—Sewage Disposal Systems—Water Works Design and Operation—Cons. Sur.—Surveys & Maps.
Rochester, Pa. Jackson, Miss.

Lacy, Atherton, Wilson & Davis
Architects and Engineers
Hotel Sterling Building.
Wilkes-Barre, Pa.

J. E. Sirrine Company
Engineers
Design Construction
Industrial Plants Electric Power
Water Supply & Purification
Sewage Disposal Reports
Greenville, South Carolina

Sullivan and Hoebel
Railroad Consulting Service
Terminals, Relocations,
Grade Crossing Elimination,
City Planning Problems,
Industrial Tracks and Yards,
Reports — Plans — Specifications
613 Empire Bldg., Knoxville, Tenn.

Frank A. Busse
Consulting Engineer
Industrial Buildings, Viaducts, Bridges, Foundations, Harbor Works, River Barge Terminals, City Planning, Airports, Sewage Treatment.
669 Shrine Building, Memphis 3, Tenn.

Lockwood & Andrews
Consulting Engineers
Airports, Paving, Industrial Plants, Drainage & Sewerage, Site Locations, Soils & Foundations, Water Supply, Structures, Harbor Works, Valuations, Reports — Design — Supervision
Union Nat'l Bank Bldg., Houston, Tex.

Myers & Noyes & Associates
Consulting Engineers
Water Supply, Sewage, Flood Control, Shore Protection, Irrigation and Reclamation, Reports and Valuations
2204 Tower Petroleum Bldg., Dallas, Texas
320 Wilson Building
Corpus Christi, Texas

Lonnie Beirne Perrin
Estimating, Consulting Reports & Appraisals
Public Buildings-Bridges and Piers
R. F. D. 4 • Richmond, Virginia
Phone 5-2693

Chas. L. Hilborn, Jr.
Engineers - Contractors
Mining, Chemical and Processing Plants—Maintenance & Construction
Solving difficult time limits or unusual Problems of continued normal operation while under construction handicaps. A specialty.
501-513 Coal & Coke Bldg.,
Bluefield, W. Va.

Hutchings & Milani
Architects, Engineers & Constructors
Design-Consultants-Constructors
Specializing in Industrial, Hotel & Resort Developments throughout the West Indies.
HAMILTON, BERMUDA.

Inspecting and Testing

Robert W. Hunt Co.
Inspecting and Testing Engineers
Inspection and Tests
of Materials
Supervision of Construction
for
Utility Plants,
Buildings, Bridges,
Machinery and Equipment
General Offices and Laboratories
175 West Jackson Boulevard, Chicago
New York — Pittsburgh — St. Louis

OFFICIAL PROPOSALS

OFFICIAL PROPOSALS
(Continued from page 171)

Bids: May 11, 1949 (974)

Northeast Tunnel

CONTRACT SECTION 1
FOR THE
DEPARTMENT OF WATER SUPPLY
CITY OF DETROIT, MICHIGAN
CONTRACT NO. DWS-27

Sealed proposals for the construction of Contract Section One of the Northeast Tunnel will be received by the Board of Water Commissioners of the City of Detroit, at Room 506, Water Board Building, 735 Randolph Street, Detroit 26, Michigan, until 10:00 A.M. Eastern Standard Time, May 11, 1949, at which time and place they will be opened and read aloud. Proposals shall be addressed to the Board of Water Commissioners of the City of Detroit, and endorsed "Proposal for Contract No. DWS-27". Any proposal received after the time referred to above will be returned to the bidder unopened.

The work consists of the construction of approximately 5851 lineal feet of tunnel 10 feet in inside diameter, with tunnel lining of plain concrete or brick masonry. The tunnel connects to an existing branch at Pennsylvania and Forest Avenues, lies in Pennsylvania Avenue from that point to Gratiot Avenue, and continues north-east on Gratiot Avenue for approximately 700 feet.

The Contract Documents, including Notice to Bidders, Form of Proposal and Contract, Plans and Specifications, may be examined, and obtained during business hours, at the office of the Department of Water Supply, Room 706, Water Board Building, Detroit, Michigan.

Each proposal shall be accompanied by a certified check or a satisfactory bidder's bond in an amount not less than five per cent (5%) of the total lump sum price bid, drawn payable to the City of Detroit, Board of Water Commissioners, as security for the acceptance of the Contract.

No proposal may be withdrawn for at least 60 days after the scheduled closing time for receipt of bids.

The Board of Water Commissioners reserves the right to waive any informality in any bid and to accept or reject any or all bids, should it deem it to be for the best interests of the City of Detroit so to do.

CITY OF DETROIT
BOARD OF WATER COMMISSIONERS
Carl J. Schoeninger, President
Edward C. Roney, Vice President
R. K. Williams
Oscar Wagner
L. G. Lenhart,
General Manager and Chief Engineer
E. H. Bauer,
Acting Secretary

Bids: June 15, 1949 (975)

Yonge Street Subway

TORONTO, CANADA

Sealed tenders, endorsed "Tenders for Yonge Street Subway, Contract S-2" will be received by the Toronto Transportation Commission at its office, 35 Yonge Street, Toronto, until 11:00 o'clock, A.M. Eastern Standard Time, on Wednesday, June 15th, 1949.

The work for which such tenders are invited consists of building approximately 3600 lineal feet of subway of various sections, together with miscellaneous work appurtenant and collateral thereto, as specified in the Contract Documents and shown on the plans. The work is to be constructed generally by what is known as "Cut and Cover Method". The work is located in Yonge Street between Queen Street and College Street in the City of Toronto, as described in more detail in Requirements for Tendering and Instructions to Tenderers.

All tenders must be made upon blank forms of tender as furnished by the Toronto Transportation Commission and included in the Contract Documents, and shall be made in accordance with the provisions contained in said documents.

The successful tenderer will be required to furnish, execute and deliver to the Commission a performance bond satisfactory to the Commission in the amount and within the time set out in the Contract Documents.

The Contract Documents, including plans and specifications, are on file and will be available to tenderers at the office of the Toronto Transportation Commission, 35 Yonge Street, Toronto, on and after April 14th, 1949. Copies of the Contract Documents may be obtained by depositing One Hundred Dollars ($100.00) with the Commission for each set of documents. The amount of the deposit will be refunded upon return of the plans and documents in good condition within ten (10) calendar days after the opening of tenders.

Each tender must be accompanied by cash or certified cheque on a chartered bank doing busines in the City of Toronto, in the amount of One Hundred and Twenty-five Thousand Dollars ($125,000.00) payable to the order of the Toronto Transportation Commission.

The Toronto Transportation Commission reserves the right to reject any or all tenders and to disregard any informalities in the tenders or tendering.

No tender may be withdrawn, after the scheduled closing time for receipt of tenders for at least forty-five (45) calendar days.

WILLIAM C. McBRIEN, Chairman,
TORONTO TRANSPORTATION
COMMISSION

ADVERTISERS IN THIS ISSUE

Allied Structural Steel Companies..... 112
Allis-Chalmers Mfg. Co.....96, 97
American Creosoting Co. 99
American Lumber & Treating Co..... 129
American Mutual Liability Ins. Co.....38, 39
American Pipe & Construction Co..... 95
American Steel Dredge Co., Inc..... 168
American Surety Co. 114
Armco Drainage & Metal Products, Inc.. 147
Atlas Powder Co. 30

Bailey Meter Co. 168
Baldwin Locomotive Wks..... 143
Barco Mfg. Co. 123
Bay City Shovels 8
Belmont Iron Wks 144
Bethlehem Foundry & Machine Co..... 41
Bethlehem Steel Co. 124, 155
Blaw-Knox Div., Blaw-Knox Co..... 109
Bruning Co., Inc., Charles..... 22
Brunson Instrument Co., Inc..... 166
Buchanan Lumber Co. 150
Bucyrus-Erie Co. 34, 35
Buff & Buff Mfg. Co. 117
Byers Co., A. M. .....2nd Cover
Byers Machine Co. 21

Caterpillar Tractor Co. 16, 17
Celotex Corp., The 145
Cement Gun Co. 158
Chain Belt Co. 13
Chapman Valve Mfg. Co. 33
Chicago Pneumatic Tool Co. 115
Chrysler Corp., Industrial Engine Div.... 12
Clearprint Paper Co. 2
Cleco Div., Reed Roller Bit Co..... 141
Clyde Iron Wks 165
Commercial Shearing & Stamping Co.... 158
Complete Machinery & Equip. Co..... 164
Concrete Surfacing Machinery Co., Inc.. 136
Construction Machinery Co. 167

Dearborn Chemical Co. 140
Detroit Diesel Engine Div., General Motors Corp. 86
Dixie Cup Co. 159
Dodge Div. Chrysler Corp. 127
Dravo Corp. 141, 149
Ductube Co. 90

Economy Forms Co. 167
Economy Pumps, Inc. 125
Electric Steel Foundry 27
Electric Storage Battery Co..... 101
Electric Tamper Equipment Co. 161
Eppinger & Russell Co. 144
Erie Pump & Engine Wks..... 168
Erie Steel Construction Co..... 25
Euclid Road Machinery Co.....10, 11

Faber-Castell Pencil Co., Inc., A. W..... 122
Fairbanks, Morse & Co..... 118
Flexible Steel Lacing Co..... 113
Flink Co. 130
Fort Pitt Bridge Wks..... 18
Four Wheel Drive Auto Co..... 104

General Electric Co. 14
General Excavator Co. 144
G. M. C. Truck & Coach Div., General Motors Corp. 137
Goodyear Tire & Rubber Co..... 1

Gordon Smith Co. 163
Gorman-Rupp Co., The 126
Governair Corp. 105
Griffin Wellpoint Corp. 136
Grinnell Co., Inc. 119
Gunite Concrete & Construction Co..... 168
Gunite Construction Corp. 105

Harnischfeger Corp. 91
Heil Co., The 102, 103
Hendrick Mfg. Co. 161
Hendrix Mfg. Co., Inc..... 36
Hewitt-Robins, Inc. 26
Hudson-Rumsey Co., Inc..... 164

Industrial Brownhoist Corp..... 130
Ingersoll-Rand 7
Inland Steel Co. 42
International Harvester Co., Inc..... 146
Irvington Form & Tank Corp..... 141

Jaeger Machine Co..... .....82, 83
Joy Mfg. Co. 28

Kinnear Mfg. Co. 163
Koppers Co. 87

Layne & Bowler, Inc..... 114
Lehigh Portland Cement Co..... 152
LeTourneau, Inc., R. G.....110, 111
Lincoln Electric Co. 131
Lith-I-Bar Co. 118
Lock Joint Pipe Co. 92
Louisville Cement Co. 6
Luria Engineering Co. 121

MacArthur Concrete Pile Corp..... 114
Mack Trucks, Inc. 9
Macomber, Inc. 135
Macwhyte Co. 20
Manhattan Rubber Div. 154
Marion Metal Products Co..... 150
Marion Power Shovel Co..... 84
Master Builders Co.....3rd Cover
Master Vibrator Co. 139
McCaffrey-Ruddock Tagline Corp..... 163
McGraw-Hill Book Co. 122
McKiernan-Terry Corp. 128
Mixermobile Mfrs. 5
Moretrench Corp. 133
Mott Core Drilling Co..... 130

National Clay Pipe Mfrs., Inc..... 151
National Gunite Corp. 118
Naylor Pipe Co. 160
Nelson Stud Welding Div. of Morton Gregory Corp. 19
New York Engineering Co..... 142
Northwest Engineering Co..... 3

Ohio Locomotive Crane Co..... 125
Osgood Co. 144
Owen Bucket Co. 192

Pennsylvania Drilling Co..... 117
Pittsburgh-Des Moines Steel Co..... 37
Pittsburgh Steel Prdts. Co..... 29
Plymouth Locomotive Wks. Div., Fate-Root-Heath Co 139
Portland Cement Assn..... 40
Pressure Concrete Co. 150

Raybestos-Manhattan, Inc., Manhattan Rubber Div. 154
Raymond Concrete Pile Co..... 81
Rockford Clutch Div., Borg-Warner Corp. 117
Rogers Bros. Corp. 93
Royal McShea 162
Ryerson & Son, Inc., Joseph T..... 166

Sauerman Bros., Inc. 113
Schramm, Inc. 23
Shotcrete Construction Co. 168
Simplex Valve & Meter Co..... 108
Smith Engineering Wks.....106, 107
Sparling, R. W. 156
Spencer, White & Prentis, Inc..... 162
Sprague & Henwood, Inc..... 105
Stang Corp., John W. 90

Texas Company .....4th Cover
Thew Shovel Co. 15
Timber Structures, Inc. 88
Timken Roller Bearing Co..... 93
Tinney Drilling Co. 125
Torrington Co. 134
Truscon Steel Co. 46
Turner Halsey Co. 31
Twin Disc Clutch Co. 148

Underpinning & Foundation Co., Inc..... 162
Unit Crane & Shovel Corp..... 100
U. S. Pipe & Foundry Co..... 24
U. S. Rubber Co. 32, 116
U. S. Steel Corp. Subsidiaries.....48, 157
U. S. Steel Supply Corp. 157
Universal Atlas Cement Co..... 48
Universal Sewer Pipe Corp..... 89
Upson Walton Co. 4

Vacuum Concrete, Inc. 156
Viber Co. 94
Vulcan Iron Wks..... 136

Wallace & Tiernan Co., Inc..... 120
Welsbach Corp., The 44
Williams Co., J. H. 168
Wood Co., R. D. 138

Yaun Dragline Bucket Co..... 168

G. R. Ramel, Sales Manager — Howard Olsen, Business Manager

Sales Representatives—Fred G. Hudson, L. H. Hunt and H. L. Keeler, 520 N. Michigan Ave., *Chicago* 11; Ralph Dorland, 68 Post Street, *San Francisco* 4; J. L. Ballard and W. G. Payne, 330 W. 42nd St., *New York* 18; A. B. Cozzens, 17th and Sansom Sts., *Philadelphia* 3; E. E. Duff, Jr., Hanna Bldg., *Cleveland* 15; R. F. Horn, Penobscot Bldg., *Detroit* 26; W. E. Donnell, Continental Bldg., *St. Louis* 8; Charles McReynolds, 621 So. Hope St., *Los Angeles* 14; Ralph Maulsby, Rhodes-Haverty Bldg., *Atlanta* 3; J. H. Allen, Empire Bank Bldg., *Dallas* 1. Other sales offices—738-39 Oliver Bldg., *Pittsburgh*; 1427 Statler Bldg., *Boston* 16; National Press Bldg., *Washington*; Aldwych House, *London, England.*

CLOSING POWER *Plus* WHEN AN OWEN BUCKET *Clamps Down*

It's the "Plus" features in a product that contribute largely to outstanding performance and build user satisfaction and profits.

Relax and swing an Owen from your boom. Closing Power PLUS is there when required for licking the toughest excavating jobs which will confront you.

OWEN CLAMSHELL BUCKETS INSURE A BIGGER DAY'S WORK

A MOUTHFUL AT EVERY BITE

THE OWEN BUCKET CO. 6010 Breakwater Ave., Cleveland, O.

BRANCHES: PHILADELPHIA • CHICAGO • BERKELEY, CALIF.

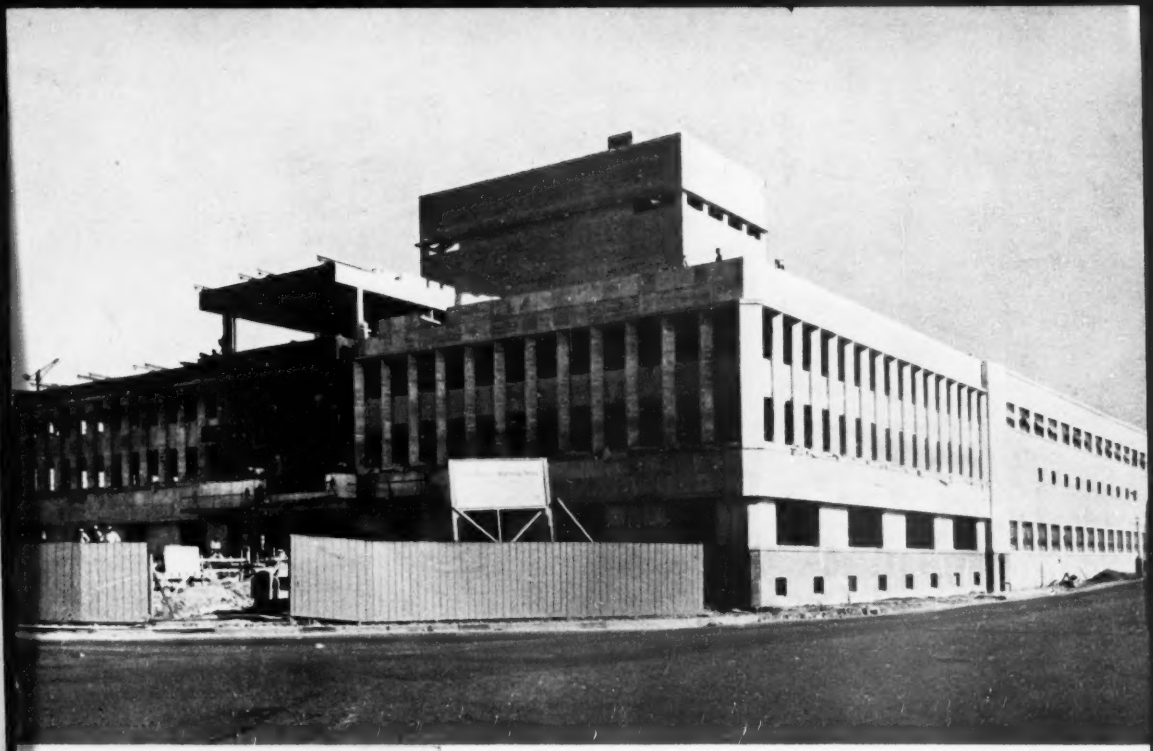

Dallas Morning News, Dallas, Texas. Archt.—George L. Dahl, Dallas; Engr.—William Ginsberg, New York City; Contr.—Henry C. Beck, Dallas; Pozzolith Ready-Mixed Concrete supplied by Dallas Concrete Co., Dallas.

OTHER MASTER BUILDERS PRODUCTS IN WHICH CEMENT DISPERSION IS EMPLOYED

EMBECO...

For non-shrink grouting and re-integration.

MASTERPLATE...

Industry's toughest floor . . . "the iron that stays on top."

MASTERTEX...

Water-resisting cement-base paint which protects and decorates exterior and interior surfaces of concrete and masonry.

OMICRON MORTARPROOFING..

Controls shrinkage cracks; minimizes leaky brickwork, also re-tempering; contains stearate.

POZZOLITH CONCRETE

is *"In The News"* . . .

Pozzolith Concrete is "in the news" — the five million dollar plant of the Dallas Morning News. It's also "in the news" from the standpoint of exceptional advantages provided in this and other structures throughout the country — for a total of over five and one-half million cubic yards of Pozzolith Concrete in 1948. Among the advantages of Pozzolith Concrete are:

- EASY PLACEABILITY
- ASSURED STRENGTH
- GOOD APPEARANCE
- WATERTIGHTNESS
- GREAT DURABILITY

These and other advantages are produced with Pozzolith *at lower cost than by any other means* because Pozzolith (1) disperses cement (2) makes available the optimum amount of entrained air (3) conforms with water-cement ratio law.

Write for full information and the use of Pozzolith with ACI and ASTM procedures.

The MASTER BUILDERS Co.

CLEVELAND 3, OHIO — TORONTO, ONTARIO

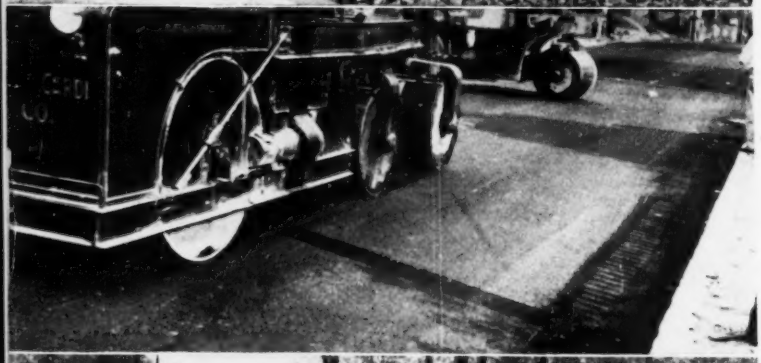

Whatever the traffic load

Texaco Asphalt surfaces include a type exactly suited to your needs

Photographs

Top: Hand-spraying Texaco Asphalt Cement in the construction of Asphalt Macadam paving on a New Jersey state highway.

Center: Constructing a heavy-duty Texaco Sheet Asphalt pavement on a Providence, R. I. street.

Bottom: Applying Texaco Rapid-curing Cutback Asphalt to a county road in Indiana.

For 45 years, Texaco has been developing a family of Asphalt products, which have kept pace with the needs of American road building practice. Whether you are constructing a heavy-duty pavement for a primary state highway, or cold-patching a village street, there is a Texaco Asphalt Cement, Cutback Asphalt or Slow-curing Asphaltic Oil refined specifically for that purpose.

State, county and municipal officials have employed these Asphaltic materials under every variety of traffic and climatic conditions. Texaco-paved streets have demonstrated their durability and low upkeep cost in 1,500 U. S. communities, including 3 out of 4 of the country's largest cities. Foreign road builders have constructed Texaco Asphalt streets and highways on all six continents.

Two booklets which contain helpful descriptions of all types of Texaco Asphalt surfacing will be sent free to interested road builders.

THE TEXAS COMPANY, Asphalt Sales Dept., 135 E. 42nd Street, New York City 17

Boston 16 Chicago 4 Denver 1 Houston 1 Jacksonville 2 Philadelphia 2 Richmond 19

TEXACO

REG. T.M.

TEXACO ASPHALT